PD 3x5V / R3 USB-FLUSH-20261026 / TOP

View from component side. Bottom drawing mirrored in X; CPL remains TOP-view coordinates on both sides.

Board 82 x 55.8 mm; 4 layers; 1.2 mm. Source SHA256: 9d332c00e763aa93b3a76596...

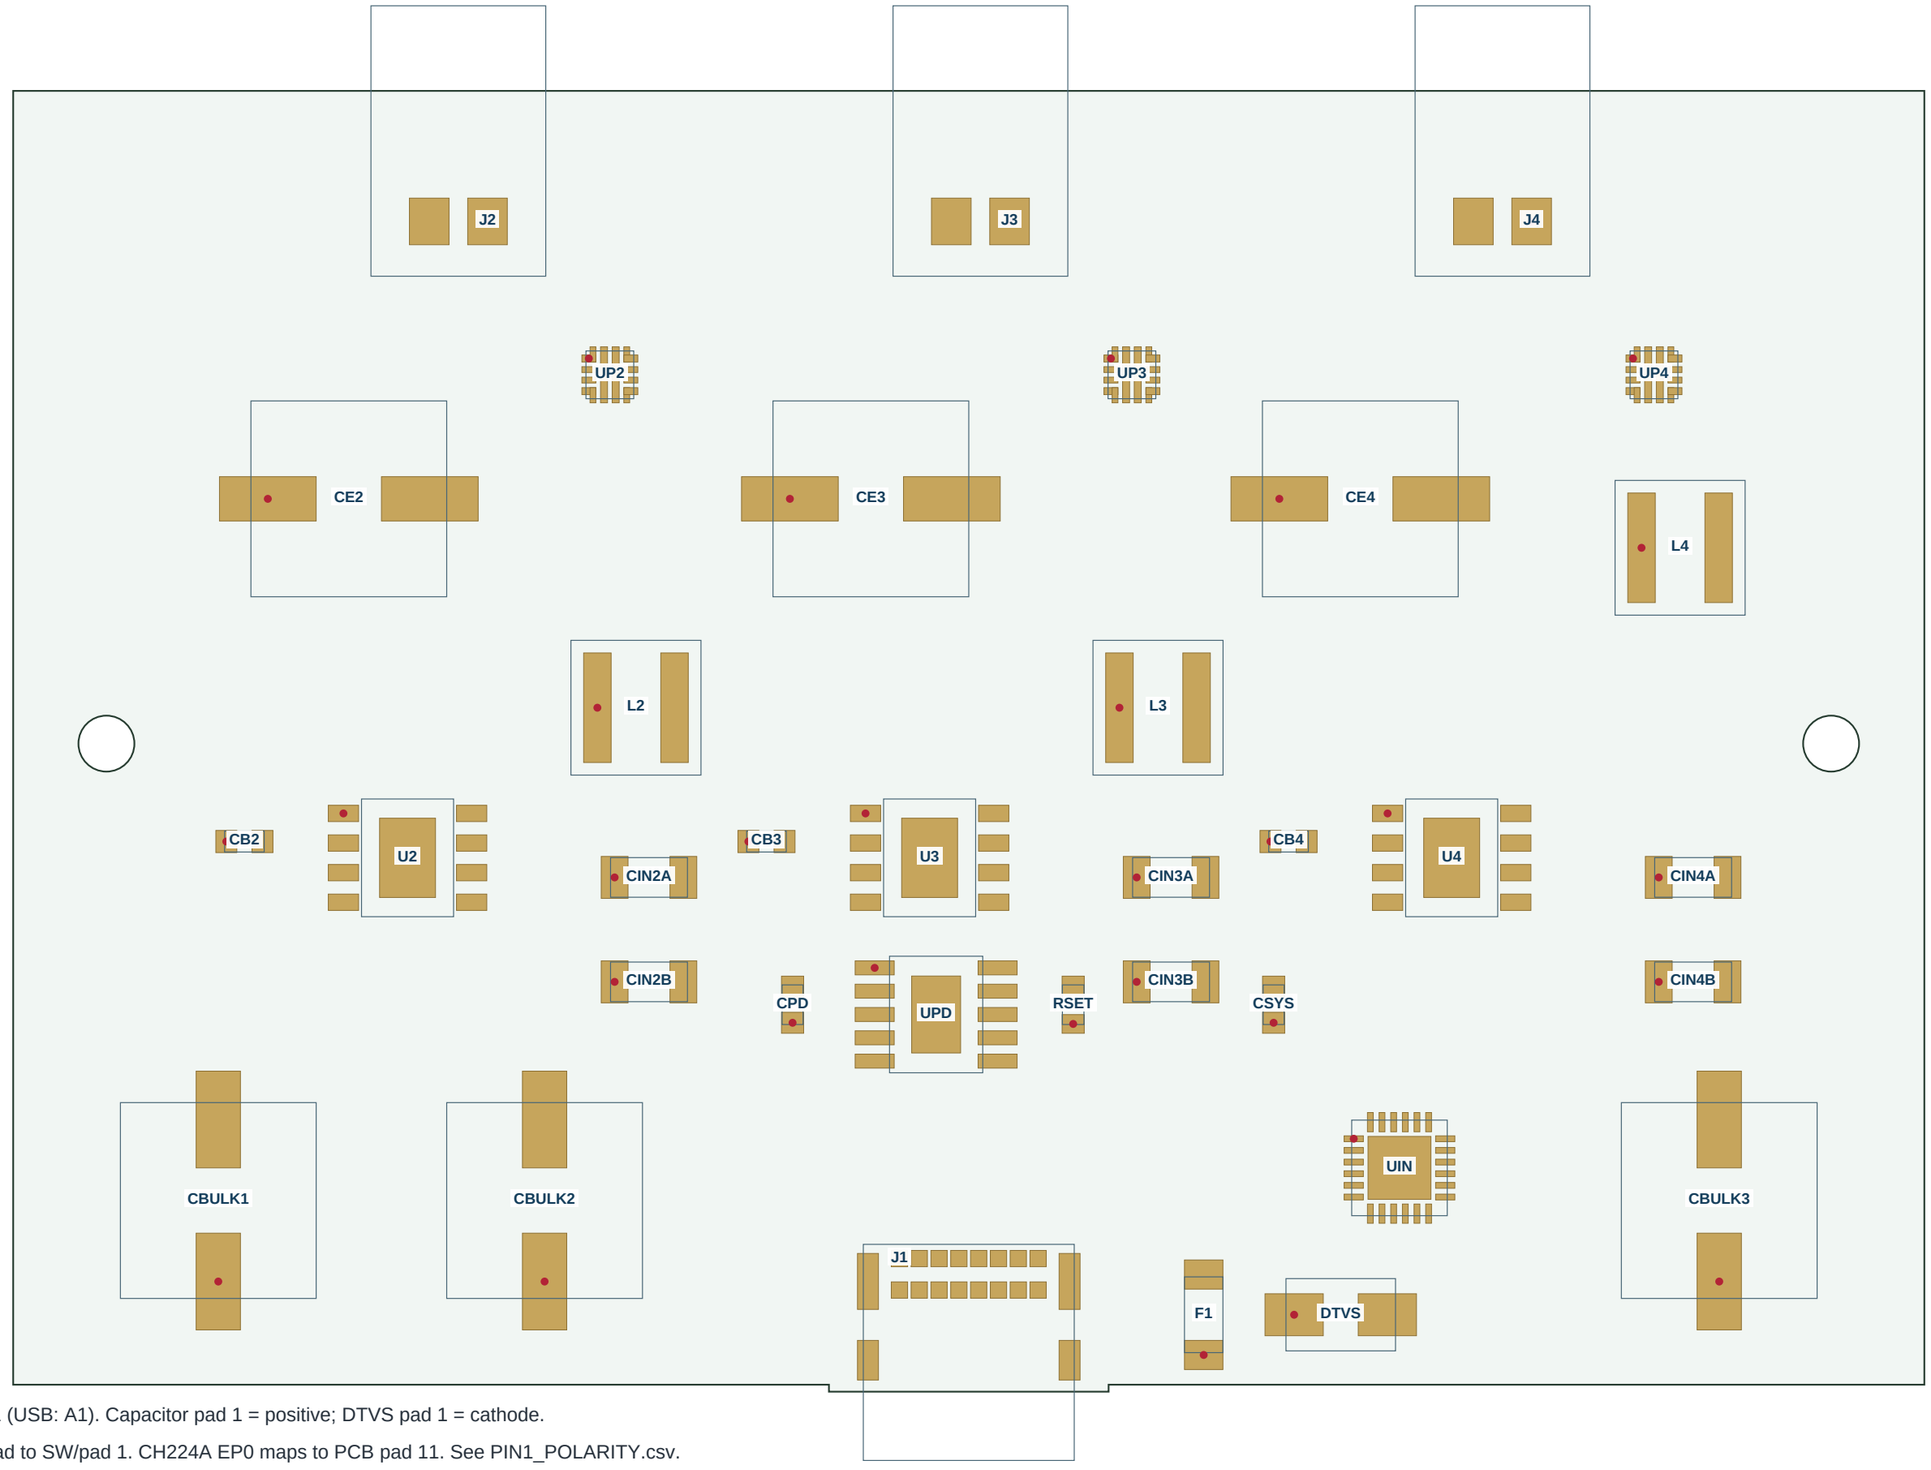

Red dot = PCB pad 1 (USB: A1). Capacitor pad 1 = positive; DTVS pad 1 = cathode.

Inductors: marked lead to SW/pad 1. CH224A EP0 maps to PCB pad 11. See PIN1_POLARITY.csv.

J1 GCT USB4085 and J2/J3/J4 are THT: fit after both reflows. H1/H2 and TP* are not purchased parts.

PD 3x5V / R3 USB-FLUSH-20261026 / BOTTOM

View from component side. Bottom drawing mirrored in X; CPL remains TOP-view coordinates on both sides.

Board 82 x 55.8 mm; 4 layers; 1.2 mm. Source SHA256: 9d332c00e763aa93b3a76596...

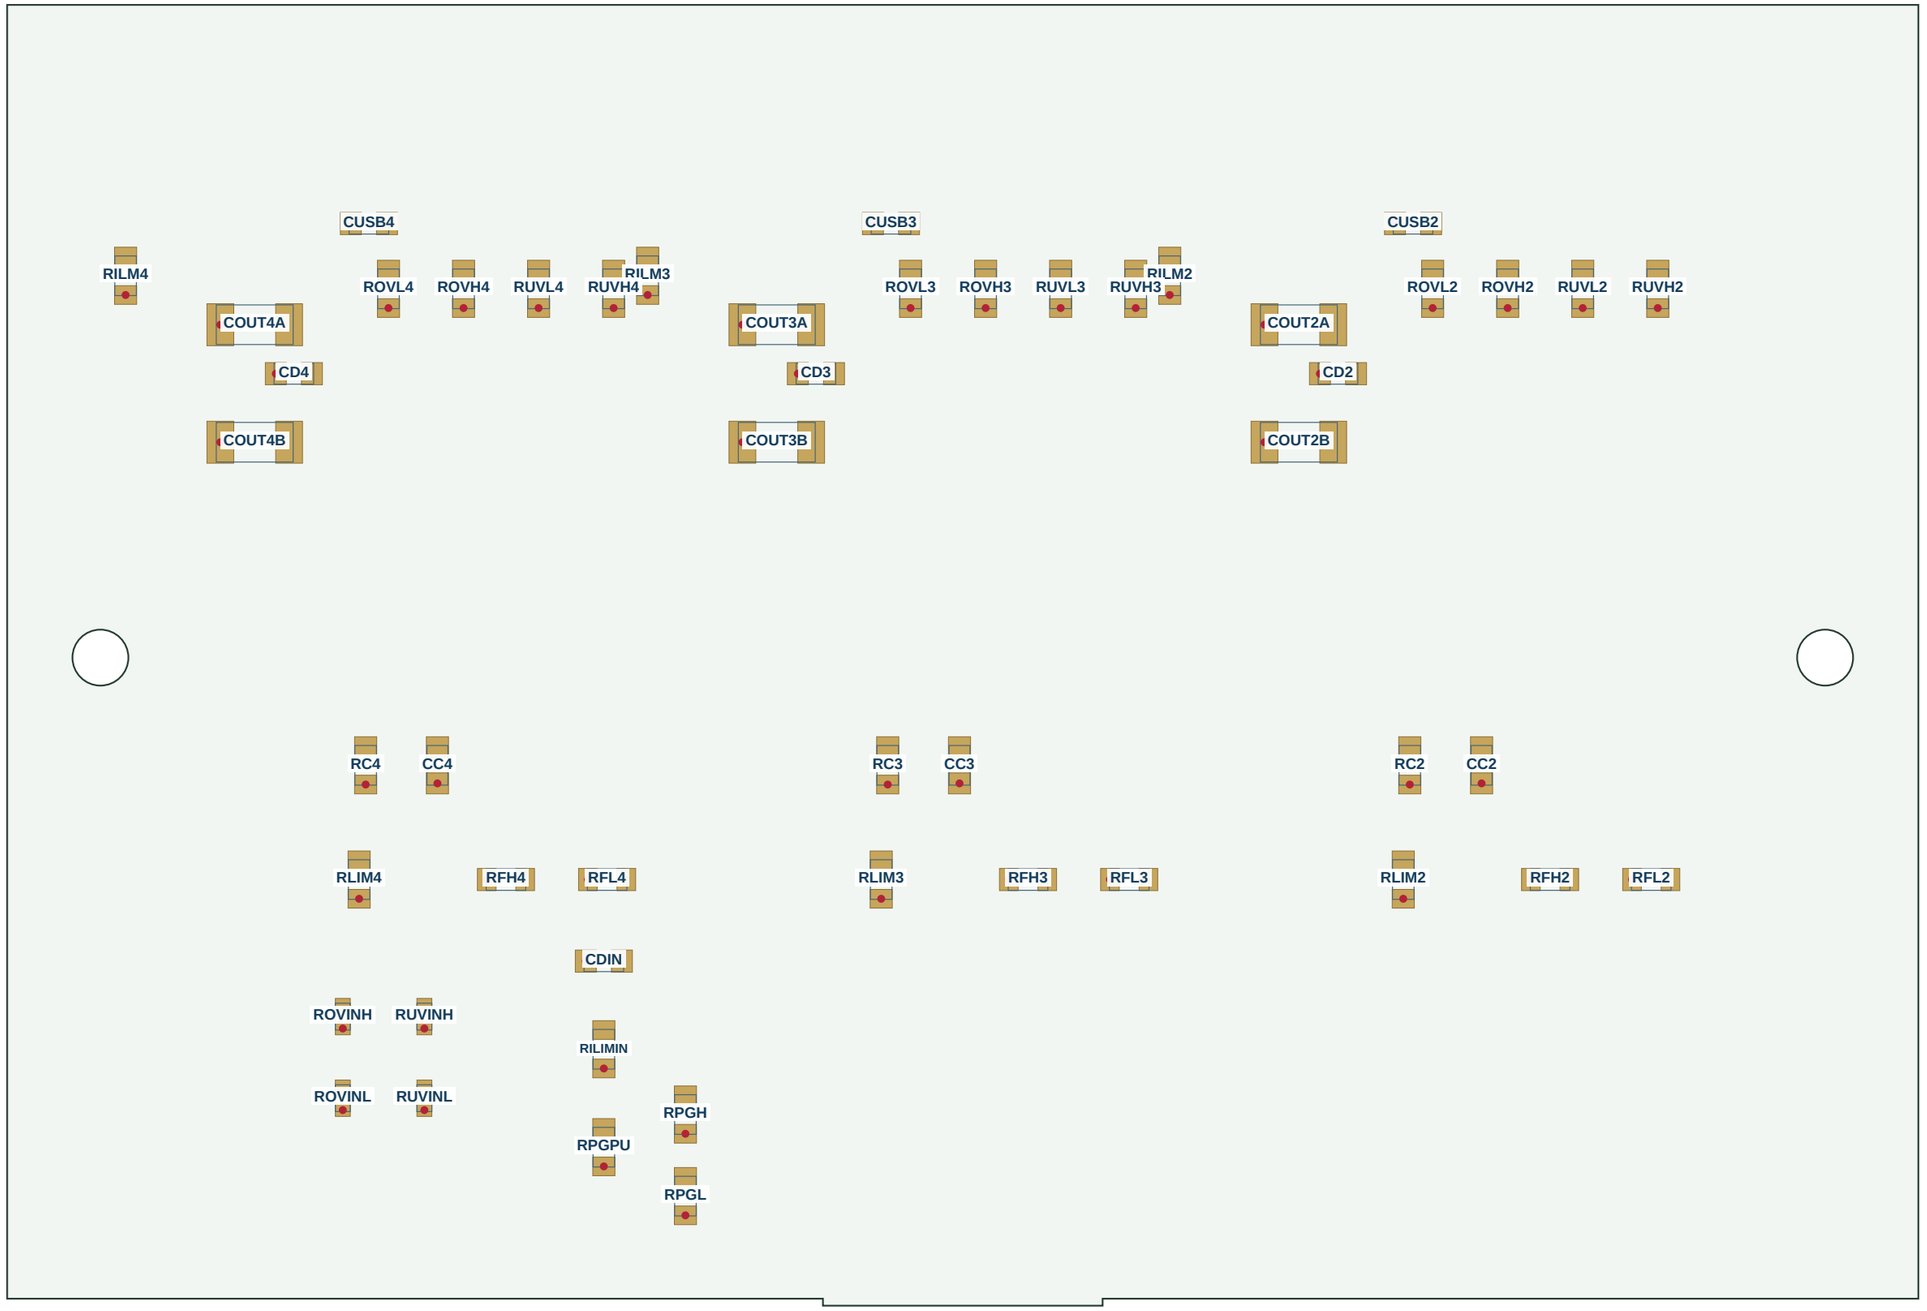

Red dot = PCB pad 1 (USB: A1). Capacitor pad 1 = positive; DTVS pad 1 = cathode.

Inductors: marked lead to SW/pad 1. CH224A EP0 maps to PCB pad 11. See PIN1_POLARITY.csv.

J1 GCT USB4085 and J2/J3/J4 are THT: fit after both reflows. H1/H2 and TP* are not purchased parts.