



GD-FC520

Cloud Access Control Integrated Machine

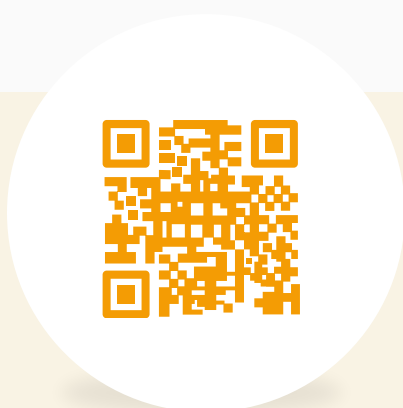


GD-FC520 Multi-Mode Access

GD-FC520 Access Control Machine is a new generation of Access Systems. The access terminal works in parallel QR CODE + Smart Card+ NFC + Bluetooth and Keypad as an option.

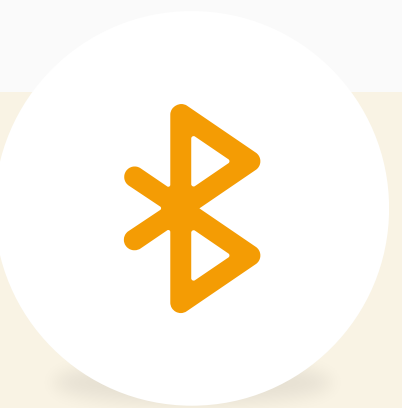
Flexible Connectivity & Standalone Operation

GD-FC520 is a Standalone Unit and also supports multiple communications protocols such as Wiegand and TCP/IP.

- 

QR Code
- 

Smart Card
- 

NFC
- 

Bluetooth
- 

Keyboard
- 

Ethernet
- 

Dry Contact

The appearance of the product adopts the standard 64-box industry standard. The operation speed is fast, the recognition rate is high, Bluetooth reading distance is up to 30 meters. GD-FC520 has strong compatibility, and it is widely used in residential communities.

GD-FC520 also works as a cloud-based solution with a professional and multi-function Smart Mobile App, either for Android & IOS And Web App.

Specifications	
Access Methods	Smart Card NFC QR Bluetooth
Card Type	Mifare 13.56 MHz & Desfire v1, v2, v3 ID (optional) HID (optional) Second generation ID card
Communication Method	Ethernet RJ 45 Wi-Fi (Optional)

Interface Type	Relay Wiegand In (Optional) Wiegand Out (Optional)
Access Control Function	Unlock - 1 channel (NO/NC) Gate sensor 1 channel input (NO/NC) Exit switch - 1 output switch with 1 signal input Voltage input - 8 ~ 24v wide voltage input Speaker - 8Ω1W
Swipe Offline	Supports real-time uploading of the device's card swipe, QR Code, Exit Switch, Alarm Trigger, Door Magnetic Event, Password
Card Holder Capacity	50.000 Users
Bluetooth Range	Multi Range Access 5 ~ 30 meters
Software Function	Create and share QR Encrypted visit invitation with access rules Add users card data from the cloud
Indication Method	Red, green, blue, white indication and light Beep
Imaging Sensor	300,000 pixel COMS sensor
Product Material	Imported PC & tempered glass
Sensor Resolution	QR, PDF417, CODEE39, CODE93, CODE128, ISBNN10, ITF,EAN13 etc.
Reading Range	0-4cm (Smart cards) / 0-20cm (QR Code) / 5 ~ 30 meters Bluetooth
Dimensions (L*W*H)	113.5 * 75.8 * 21.5mm
Cabling	100m (20 AWG), multi-conductor, stranded, 6 cores, with an overall Foil shield
Working Voltage	12V/1A
Standby Current	62 mA
Working Temperature	-20 – 70 °C
Working Humidity	10% ~ 90%
Conserve Humidity	10% ~ 90% non-condensed
Environment Sealing	IP64
Drop	Designed to withstand 1.8M drops to concrete 300 TIMES
Net Weight	200 g
Packing Weight	400 g
Certification	CE, FCC, ROHS, IEC60950, IEC62471, EN55022, EN55024, EN61000-3, IEC62321, EN60950, EN60529

Trusted by Modern Communities & Enterprises

Key Applications with Happy Community