
Networks Practical's Semester 2

WEEK 1

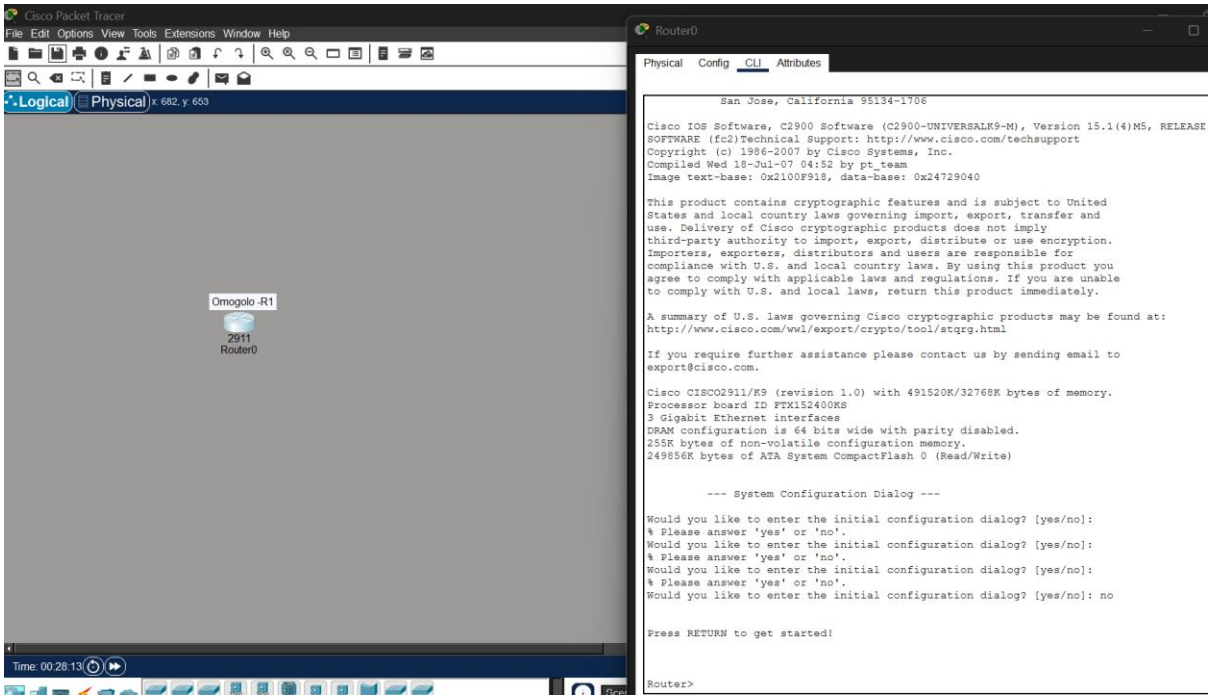

User Exec Mode

```
Router>
Router>?
Exec commands:
  <1-99>      Session number to resume
  connect     Open a terminal connection
  disable     Turn off privileged commands
  disconnect  Disconnect an existing network connection
  enable      Turn on privileged commands
  exit        Exit from the EXEC
  logout      Exit from the EXEC
  ping        Send echo messages
  resume      Resume an active network connection
  show        Show running system information
  ssh         Open a secure shell client connection
  telnet      Open a telnet connection
  terminal    Set terminal line parameters
  traceroute  Trace route to destination
```

Help

```
Router>show version
Cisco IOS Software, C2900 Software (C2900-UNIVERSALK9-M), Version 15.1(4)M4, RELEASE
SOFTWARE (fc2)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2012 by Cisco Systems, Inc.
Compiled Thurs 5-Jan-12 15:41 by pt_team

ROM: System Bootstrap, Version 15.1(4)M4, RELEASE SOFTWARE (fc1)
cisco2911 uptime is 14 minutes, 29 seconds
System returned to ROM by power-on
System image file is "flash0:c2900-universalk9-mz.SPA.151-1.M4.bin"
Last reload type: Normal Reload

This product contains cryptographic features and is subject to United
States and local country laws governing import, export, transfer and
use. Delivery of Cisco cryptographic products does not imply
third-party authority to import, export, distribute or use encryption.
Importers, exporters, distributors and users are responsible for
compliance with U.S. and local country laws. By using this product you
agree to comply with applicable laws and regulations. If you are unable
to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html

Router>show history
  show version
  show history
Router>
```

Show commands

```
Router>show version
Cisco IOS Software, C2900 Software (C2900-UNIVERSALK9-M), Version 15.1(4)M4, RELEA
SOFTWARE (fc2)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2012 by Cisco Systems, Inc.
Compiled Thurs 5-Jan-12 15:41 by pt_team

ROM: System Bootstrap, Version 15.1(4)M4, RELEASE SOFTWARE (fc1)
cisco2911 uptime is 14 minutes, 29 seconds
System returned to ROM by power-on
System image file is "flash0:c2900-universalk9-mz.SPA.151-1.M4.bin"
Last reload type: Normal Reload

This product contains cryptographic features and is subject to United
States and local country laws governing import, export, transfer and
use. Delivery of Cisco cryptographic products does not imply
third-party authority to import, export, distribute or use encryption.
Importers, exporters, distributors and users are responsible for
compliance with U.S. and local country laws. By using this product you
agree to comply with applicable laws and regulations. If you are unable
to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html

Router>show history
  show version
  show history
Router>enable
Router#
```

Copy



Privileged exec mode

```
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#?
Configure commands:
  aaa                 Authentication, Authorization and Accounting.
  access-list         Add an access list entry
  banner              Define a login banner
  bba-group           Configure BBA Group
  boot                Modify system boot parameters
  cdp                 Global CDP configuration subcommands
  class-map           Configure Class Map
  clock               Configure time-of-day clock
  config-register     Define the configuration register
  crypto              Encryption module
  default             Set a command to its defaults
  do                  To run exec commands in config mode
  dot11               IEEE 802.11 config commands
  enable              Modify enable password parameters
  end                 Exit from configure mode
  exit                Exit from configure mode
  flow                Global Flow configuration subcommands
  hostname            Set system's network name
  interface           Select an interface to configure
  ip                  Global IP configuration subcommands
  ipv6                Global IPv6 configuration commands
 --More--
```

Global Configuration Mode