


“EASCO” Flush Bottom Ball Valve (Single Pc. Design Flanged End)

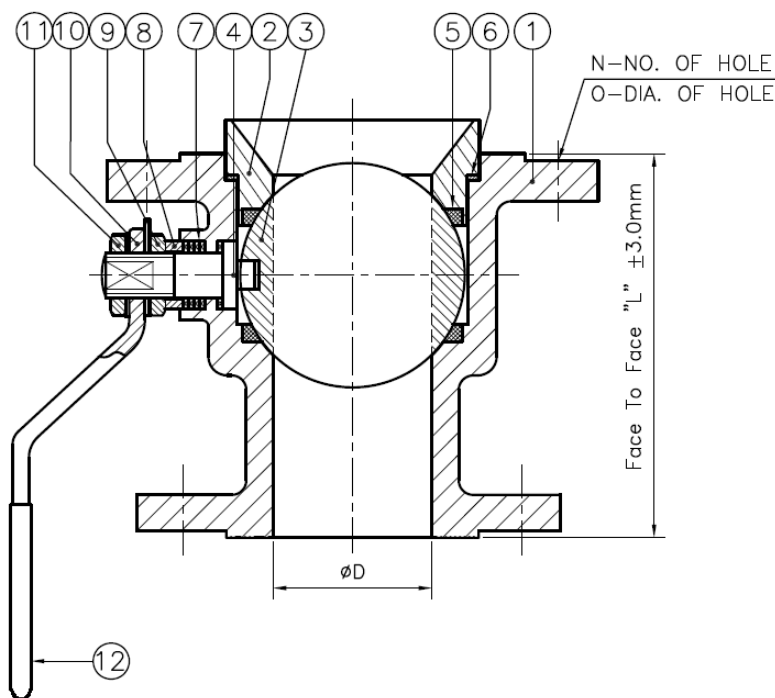

Features:-

- Low Operating Torque
- Leak Tight Stem Sealing
- Pressure Rating – 150#
- End Connection – Flanged End, RF
- Flange Drilling – As per ANSI B16.5, 150#
- Face to Face – Manufacturing Std.
- **Operation – Manual Hand Lever Operated 45 Degree**

Testing Standard:- BS 6755

Test Pressure in PSIG		
Test	Hydrostatic	Air
Pr. Rating	150#	
Body	450	
Seat	325	80

Part List:- Standard Dimension (150#):-

No.	Part Name	Materials
01	Body	ASTM A351 Gr. CF8 / CF8M
02	Ball	AISI 304 / 316
03	Stem	AISI 304 / 316
04	Ball Seat	PTFE / GFT / CFT
05	Body Seal	PTFE / GFT / CFT
06	Gland Seal	PTFE / GFT / CFT
07	Gland Bush	SS
08	Gland Nut	SS
09	Hand Lever	SS
10	Hand Lever Nut	SS
11	Lever Sleeve	PVC

SIZE (MM)	Bore (MM)	F to F (MM)	Vessel Side Flange Size	Outlet Side Flange Size
25x40	25	82	40	25
40x40	40	105	40	40
40x50	40	105	50	40
50x50	40	105	50	50
50x65	50	120	65	50
50x80	50	120	80	50
65x65	65	122	65	65
65x80	65	122	80	65
80x80	65	122	80	80
80x100	80	140	100	80
100x100	80	140	100	100
100x150	100	180	150	100
150x150	100	180	150	150

Due to continuous development Program, the design & data given in this leaflet are subject to change without prior notice.

ANITA ENGINEERING WORKS

58-59, Narayan Estate, Opp. Shree Ram Estate, Nr. CMC Ltd. Odhav, Ahmedabad-382415, Gujarat, India
Phone: +91 79 22974101, Fax: +91 79 22875014
Email: eascovalves@yahoo.com, eascovalves@gmail.com, Web: www.eascovalve.com

