


## "EASCO" Wafer Type Butterfly Valve Gear Operated

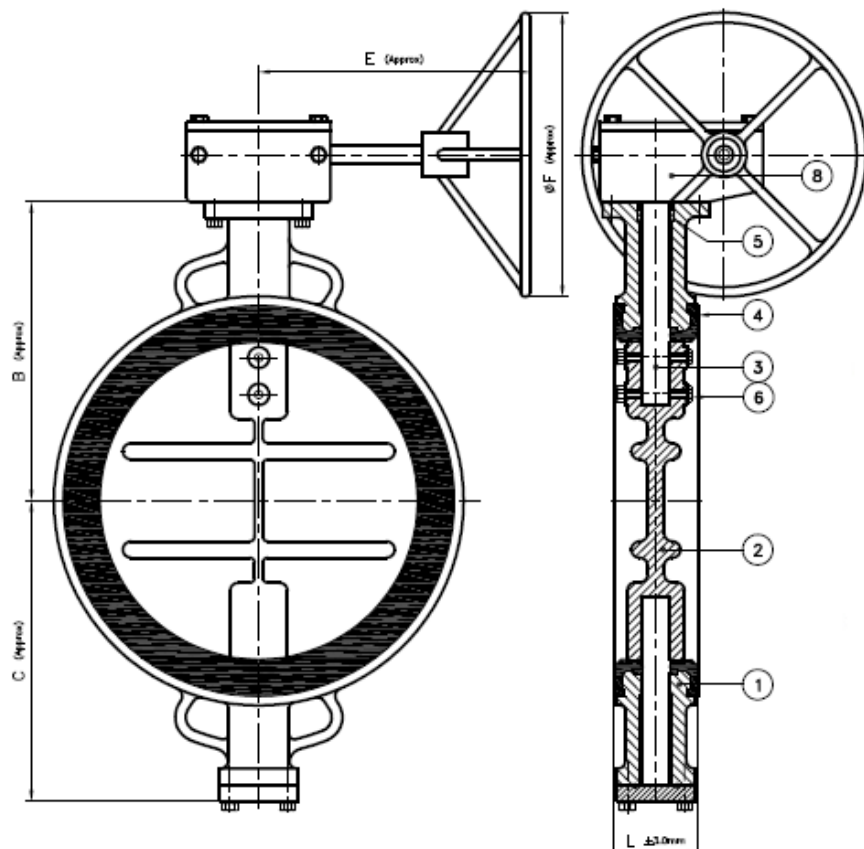

### Features: -

- Zero Leakage
- Leak Tight Shut Off
- Lower Torque
- Smooth Operation & Installation
- Long Life
- Available in PN10 / PN16

### Testing Standard: - BS 6755

Test Pressure in PSIG		
Test	Hydrostatic	Hydrostatic
Pr. Rating	PN 10	PN 16
Body	340	425
Seat	230	300

### Part List: -

No.	Part Name	Materials
01	Body	IS 210 Gr. FG 200 / Ductile Iron A 216 Gr. WCB / CF8 / CF8M
02	Disc	IS 210 Gr. FG 200 / Ductile Iron A 216 Gr. WCB / CF8 / CF8M
03	Stem	AISI 410/304/316
04	Body Seat (Liner)	Neoprene / EPDM / Nitrile / Silicon / Viton / Other Request
05	Gland Seal	Neoprene / EPDM / Nitrile / Silicon / Viton / Other Request
06	Disc Lock Pin	SS 304/316
07	Gear Box	Worm & Gear Type
08	Fasteners	CS / SS304 / SS316

### Standard Dimension: -

Size	500	600	700	750	800	850
L	127	154	229	229	241	241
B	405	540	565	590	590	610
C	370	460	515	540	650	675
E	350	350	380	380	395	395
ØF	500	600	500	600	600	600
ISO 5211 Flange	F16	F16	F16	F16	F25	F25

Due to continuous development Program, the design & data given in this leaflet are subject to change without prior notice.

## ANITA ENGINEERING WORKS

58-59, Narayan Estate, Opp. Shree Ram Estate, Nr. CMC Ltd. Odhav, Ahmedabad-382415, Gujarat, India

Phone: +91 79 22974101, Fax: +91 79 22875014

Email: eascovalves@gmail.com, eascovalves@yahoo.com, Web: [www.eascovalve.com](http://www.eascovalve.com)