


"EASCO" Double Flange Center Disc Butterfly Valve Lever Operated

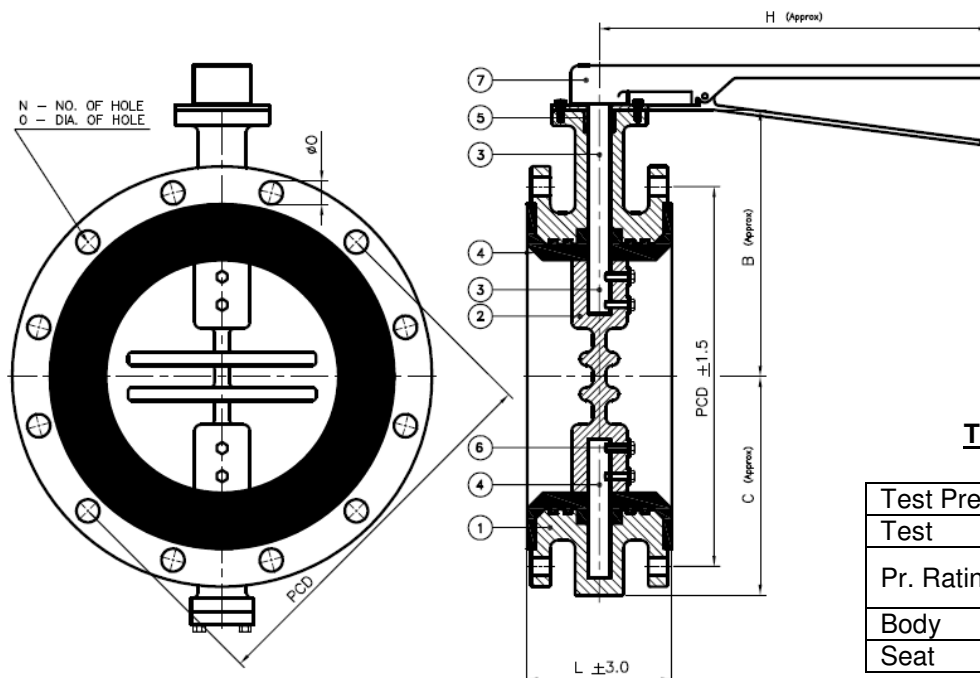

Features: -

- Zero Leakage
- Leak Tight Shut Off
- Lower Torque
- Smooth Operation & Installation
- Long Life
- Available in PN10 / PN16

Testing Standard: - BS 6755

Test Pressure in PSIG		
Test	Hydrostatic	Hydrostatic
Pr. Rating	PN 10	PN 16
Body	340	425
Seat	230	300

Part List: -

No.	Part Name	Materials
01	Body	IS 210 Gr. FG 200 / Ductile Iron A 216 Gr. WCB / CF8 / CF8M
02	Disc	IS 210 Gr. FG 200 / Ductile Iron A 216 Gr. WCB / CF8 / CF8M
03	Stem	AISI 410/304/316
04	Body Seat (Liner)	Neoprene / EPDM / Nitrile / Silicon / Viton / Other Request
05	Gland Seal	Neoprene / EPDM / Nitrile / Silicon / Viton
06	Disc Lock Pin	CS / SS
07	Hand Lever	CS / SS
08	Throttling Plate	CS / SS
08	Fasteners	CS / SS

Standard Dimension (150#): -

Size	50	65	80	100	125	150	200
L	108	112	114	127	140	140	152
B	125	135	155	160	180	210	250
C	85	95	102	114	134	147	175
H	180	180	215	215	265	265	325
PCD	121	140	152	190	216	241	298
N	4	4	4	8	8	8	8
O	19	19	19	19	22	22	22
ISO 5211 Flange	F05	F05	F05	F05	F05	F05	F07

Due to continuous development Program, the design & data given in this leaflet are subject to change without prior notice.

ANITA ENGINEERING WORKS

58-59, Narayan Estate, Opp. Shree Ram Estate, Nr. CMC Ltd. Odhav, Ahmedabad-382415, Gujarat, India

Phone: +91 79 22974101, Fax: +91 79 22875014

Email: eascovalves@gmail.com, eascovalves@yahoo.com, Web: www.eascovalve.com