


"EASCO" Lug Type Butterfly Valve Lever Operated

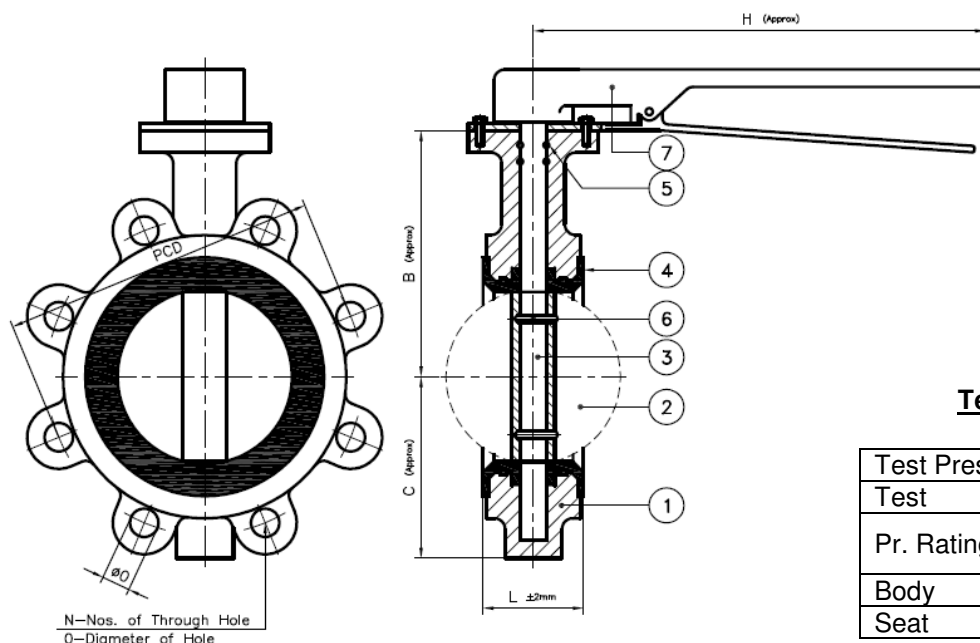

Features: -

- Zero Leakage
- Leak Tight Shut Off
- Lower Torque
- Smooth Operation & Installation
- Long Life
- Available in PN10 / PN16

Testing Standard: - BS 6755

Test Pressure in PSIG		
Test	Hydrostatic	Hydrostatic
Pr. Rating	PN 10	PN 16
Body	340	425
Seat	230	300

Part List: -

No.	Part Name	Materials
01	Body	IS 210 Gr. FG 200 / Ductile Iron A 216 Gr. WCB / CF8 / CF8M
02	Disc	IS 210 Gr. FG 200 / Ductile Iron A 216 Gr. WCB / CF8 / CF8M
03	Stem	AISI 410/304/316
04	Body Seat (Liner)	Neoprene / EPDM / Nitrile / Silicon / Viton / Other Request
05	Gland Seal	Neoprene / EPDM / Nitrile / Silicon / Viton / Other Request
06	Disc Lock Pin	SS 304/316
07	Hand Lever	CS / SS
08	Fasteners	CS / SS

Standard Dimension (150#): -

Size	40	50	65	80	100	125	150	200	250	300
L	36	43	46	46	52	56	56	60	68	78
B	92	103	110	118	148	164	176	230	266	300
C	52	70	76	85	105	115	130	156	224	236
H	180	180	180	215	215	215	265	325	385	385
PCD	98	121	140	152	190	216	241	298	362	432
N	4	4	4	4	8	8	8	8	12	12
O	16	19	19	19	19	22	22	22	25	25
ISO5211 Flange	F05	F05	F05	F05	F05	F05	F05	F10	F10	F10

Due to continuous development Program, the design & data given in this leaflet are subject to change without prior notice.

ANITA ENGINEERING WORKS

58-59, Narayan Estate, Opp. Shree Ram Estate, Nr. CMC Ltd. Odhav, Ahmedabad-382415, Gujarat, India

Phone: +91 79 22974101, Fax: +91 79 22875014

Email: eascovalves@gmail.com, eascovalves@yahoo.com, Web: www.eascovalve.com