
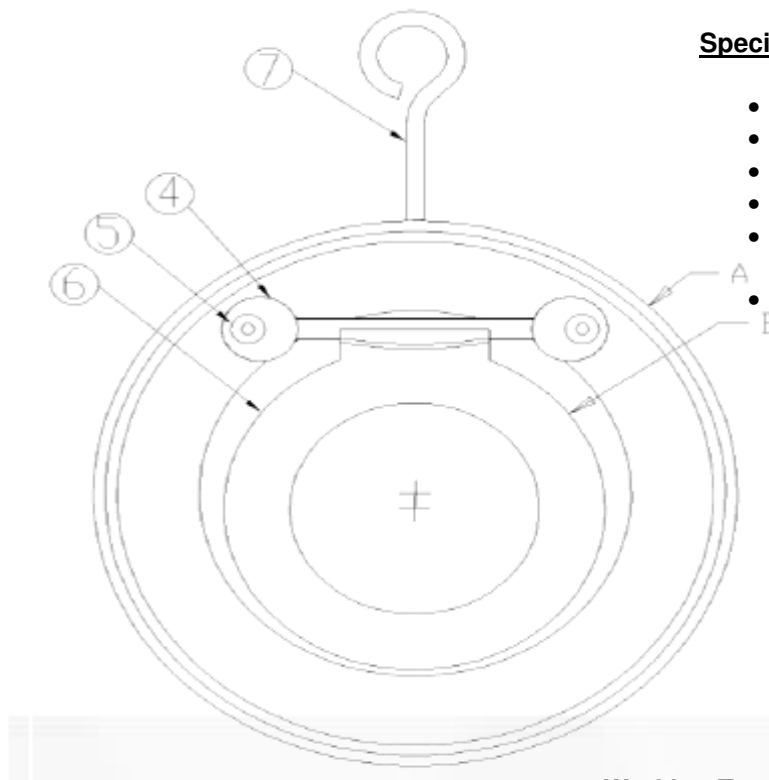


## “EASCO” Single Wafer NRV

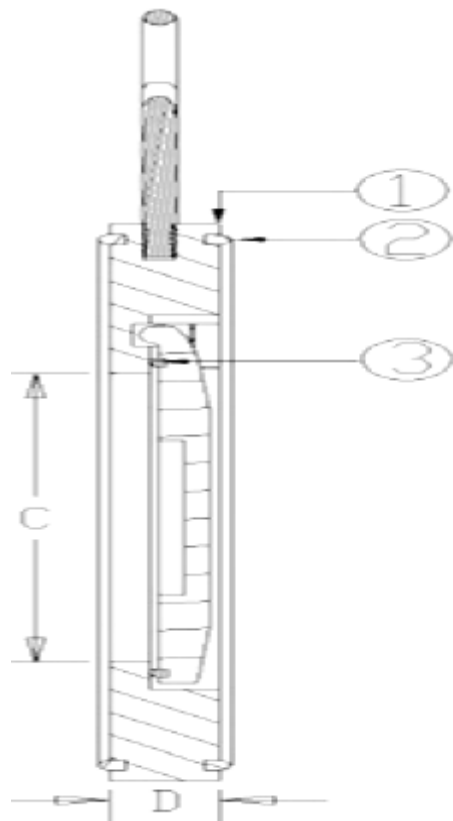

### Specification & Features-

- Easily Installed
- Light Weight
- Tight Shut-off
- Economical
- Interchangeable Disc
- Low Maintenance

Working Temp.: 20 C to 200 C  
Working Pr.: 500 PSG Hyd.

### Part Name:-

### Size / Dimension:-

No.	Part Name	Material
01	Body	WCB / CF8 / CF8M
02	Outer Ring	EPDM
03	Inner Ring	EPDM
04	Allen key	MS / SS
05	Disc	WCB / CF8 / CF8M
06	I-Bolt	MS

Size	A	B	C	D
40	86	32	22	19
50	97	41	30	19
65	110	50	40	19
80	130	62	50	19
100	160	84	70	19
125	192	107	92	19
150	216	128	112	19
200	273	172	157	28
250	336	213	195	28
300	385	250	230	38
350	445	310	275	40
400	496	352	320	40

Due to continuous development Program, the design & data given in this leaflet are subject to change without prior notice.

## ANITA ENGINEERING WORKS

58-59, Narayan Estate, Opp. Shree Ram Estate, Nr. CMC Ltd. Odhav, Ahmedabad-382415, Gujarat, India

Phone: +91 79 22974101, Fax: +91 79 22875014

Email: eascovalves@gmail.com, eascovalves@yahoo.com, Web: [www.eascovalve.com](http://www.eascovalve.com)

