


## "EASCO" PTFE Lined Butterfly Valve Pneumatic Operated

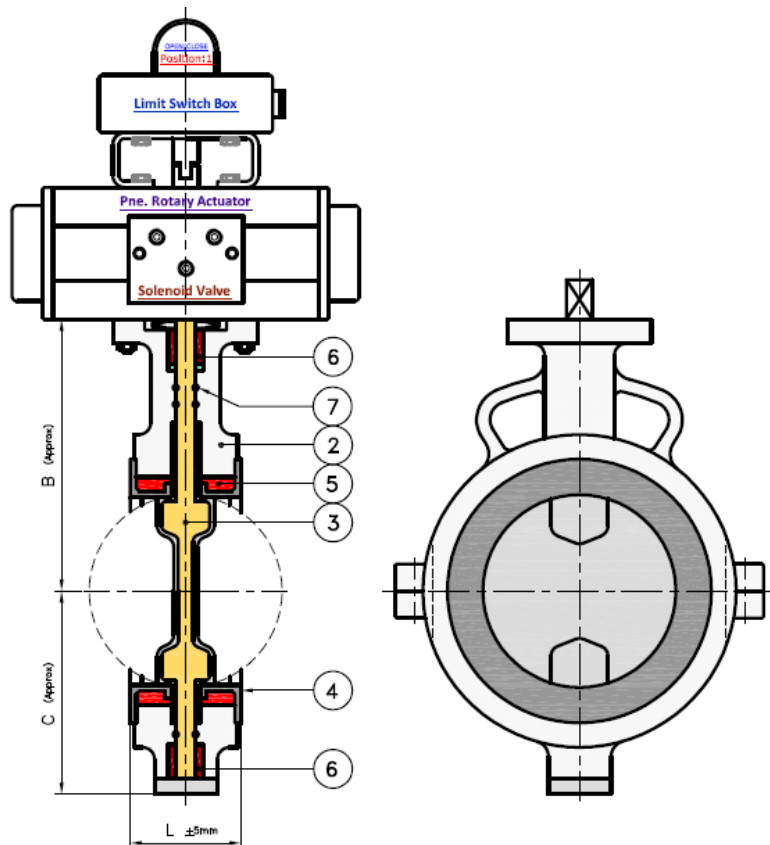

### Features: -

- Temp: Up to 200 C (PFA Lining)
- Temp: Up to 160 C (FEP Lining)
- Lining Thickness : Minimum 3mm all Parts
- Smooth Operation & Installation
- Long Life

### Testing Standard:

Test Pressure in PSIG	
Test	Hydrostatic
Pr. Rating	ASA150#
Body	10
Seat	9.8

### Part List: -

No.	Part Name	Materials
01	Upper Body	DI / WCB-CS / (CF8)SS304 / (CF8M)SS316
02	Lower Body	
03	Disc	CS / SS304 / SS316 With PTFE-FEP / PFE Lining
04	Seat	PTFE – FEP / PFA
05	Seat Back Seal	Silicon
06	Stem Guide Bush	PTFE
07	Stem Seal	Viton
08	Actuator	Double / Single Acting
09	Solenoid	3x2 / 5x2 Way, Weather / Flame Proof
10	Limit Switch	SPDT / DPDT Type, Weather / Flame Proof

### Standard Dimension (150#): -

Size	50	65	80	100	125	150	200	250	300
L	43	46	46	52	56	56	60	68	78
B	103	110	118	148	164	176	230	365	415
C	70	76	85	105	115	130	156	210	230

Due to continuous development Program, the design & data given in this leaflet are subject to change without prior notice.

# ANITA ENGINEERING WORKS

58-59, Narayan Estate, Opp. Shree Ram Estate, Nr. CMC Ltd. Odhav, Ahmedabad-382415, Gujarat, India

Phone: +91 79 22974101, Fax: +91 79 22875014

Email: eascovalves@gmail.com, eascovalves@yahoo.com, Web: [www.eascovalve.com](http://www.eascovalve.com)