


"EASCO" PTFE Lined "Y" Type Strainer

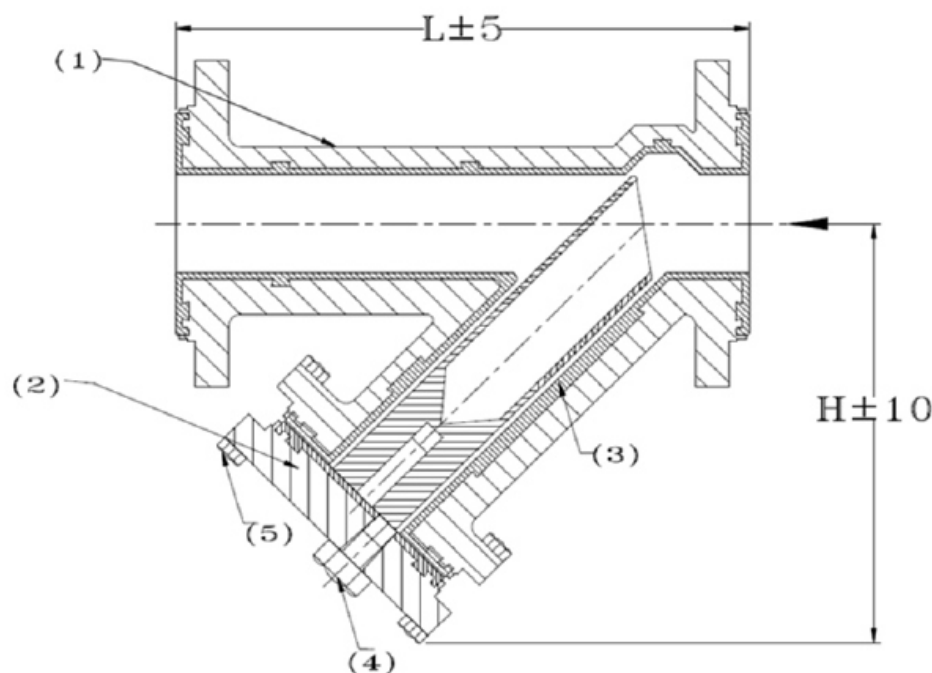

Features: -

- Temp: Up to 200 C (PFA Lining)
- Temp: Up to 160 C (FEP Lining)
- Lining Thickness : Minimum 3mm all Parts
- Long Life

Testing Standard:

Test Pressure in PSIG	
Test	Hydrostatic
Pr. Rating	ASA150#
Body	10
Seat	9.8

Part List: -

No.	Part Name	Materials
01	Body	DI / WCB-CS / (CF8)SS304 / (CF8M)SS316
02	Cover	With PFA or FEP Lining
03	Mesh	SS 304 / 316
04	Drain Plug	CS / SS 304/ 316 With PTFE Lined
05	Cover Bolt & Nut	CS / B7 / 2H / SS 304 / 316
06	Gasket	PTFE

Standard Dimension (150#): -

Size	25	40	50	65	80	100	150
L	190	260	284	318	348	415	508
OD	108	127	152	178	191	229	279
PCD	79	98	121	140	152	190	241
RF Dia	51	73	92	105	127	157	216
No. of Hole	4	4	4	4	4	8	8
Hole Dia	16	16	19	19	19	19	22
H	130	190	205	204	260	310	370

Due to continuous development Program, the design & data given in this leaflet are subject to change without prior notice.

ANITA ENGINEERING WORKS

58-59, Narayan Estate, Opp. Shree Ram Estate, Nr. CMC Ltd. Odhav, Ahmedabad-382415, Gujarat, India

Phone: +91 79 22974101, Fax: +91 79 22875014

Email: eascovalves@gmail.com, eascovalves@yahoo.com, Web: www.eascovalve.com