
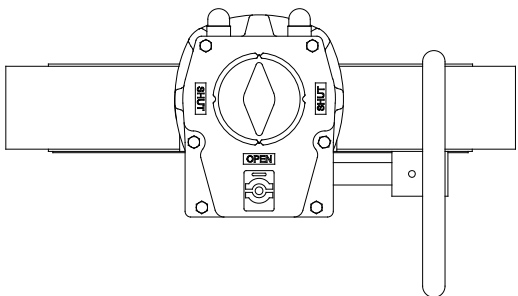
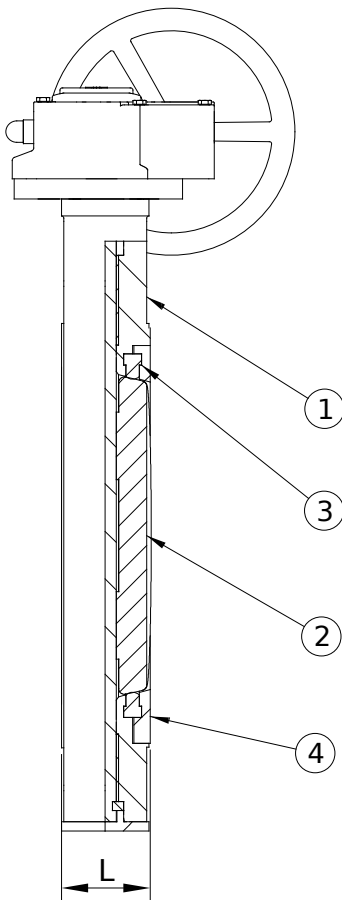


LUG BUTTERFLY VALVE PN 10

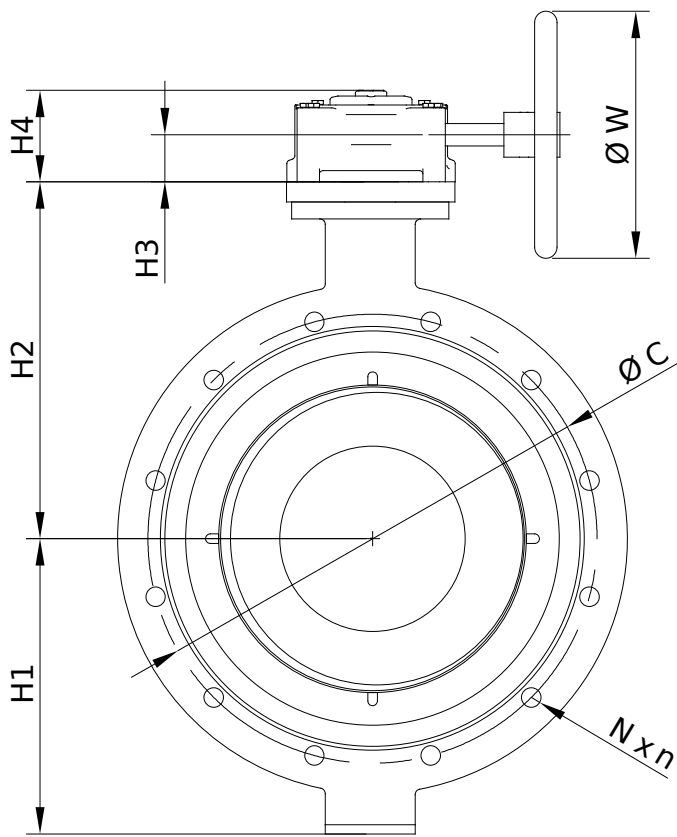

- Operation options:
- lever operated: DN80 - DN150
  - gear operated: DN200 - DN350
  - actuator operated: acc to request

No.	Part	Material
1	Body	Carbon steel / Stainless steel / DUPLEX
2	Disc	AISI 304 (W.Nr. 1.4301) / AISI 316 (W.Nr. 1.4401)
3	Seat	NBR / FKM / FVMQ / PTFE
4	Body disc	AISI 304 (W.Nr. 1.4301) / AISI 316 (W.Nr. 1.4401)

\* suitable for temperatures from:- 25°C up to +150°C, FKM  
- 30°C up to +120°C, NBR  
- 50°C up to +150°C, FVMQ  
- 50°C up to +160°C, PTFE

PN10									
DN	ØC	H1	H2	H3	H4	N	n	L	ØW
80	160	113	150	35	75	M16	8	46	250
100	180	130	161	35	75	M16	8	52	250
125	210	165	200	35	75	M16	8	56	250
150	240	175	212	35	75	M20	8	56	250
200	295	208	244	43	92	M20	8	60	250
250	350	243	280	43	92	M20	12	68	250
300	400	268	305	43	92	M20	12	78	250
350	460	293	330	43	92	M20	16	79	250

