


# STAINLESS STEEL GLOBE OUTLET VALVE PN 16

WITH POSITION INDICATOR AND LOCKING DEVICE

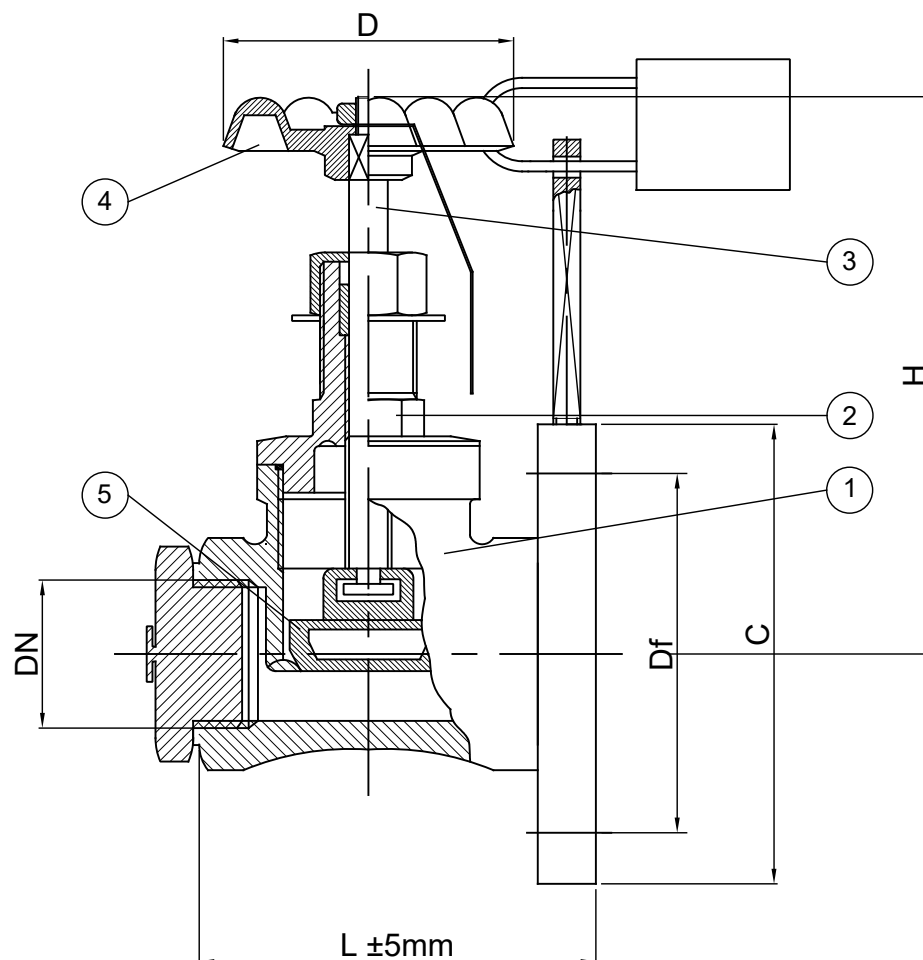

| No. | Part      | Material                                 |
|-----|-----------|--|
| 1   | Body      | W.Nr. 1.4408                             |
| 2   | Bonnet    | W.Nr. 1.4408                             |
| 3   | Stem      | W.Nr. 1.4401                             |
| 4   | Handwheel | Ductile iron, Stainless steel, Aluminium |
| 5   | Disc      | W.Nr. 1.4408                             |

|        | DN | 15  | 25  | 32  |
|--------|----|-----|-----|-----|
| D      | mm | 62  | 75  | 75  |
| Df     | mm | 65  | 85  | 100 |
| C      | mm | 95  | 115 | 140 |
| H      | mm | 106 | 122 | 122 |
| L      | mm | 73  | 96  | 101 |
| Weight | kg | 1.1 | 2   | 2.8 |

Flange drilled according to DIN PN 16.  
 Operating temperature: tmin = -50°C; tmax = +200 °C  
 Suitable for environment temperature t ≥ -50°C