


STAINLESS STEEL GLOBE OUTLET VALVE DIN 42568

WITH POSITION INDICATOR, LOCKING DEVICE AND SAMPLING PIPE

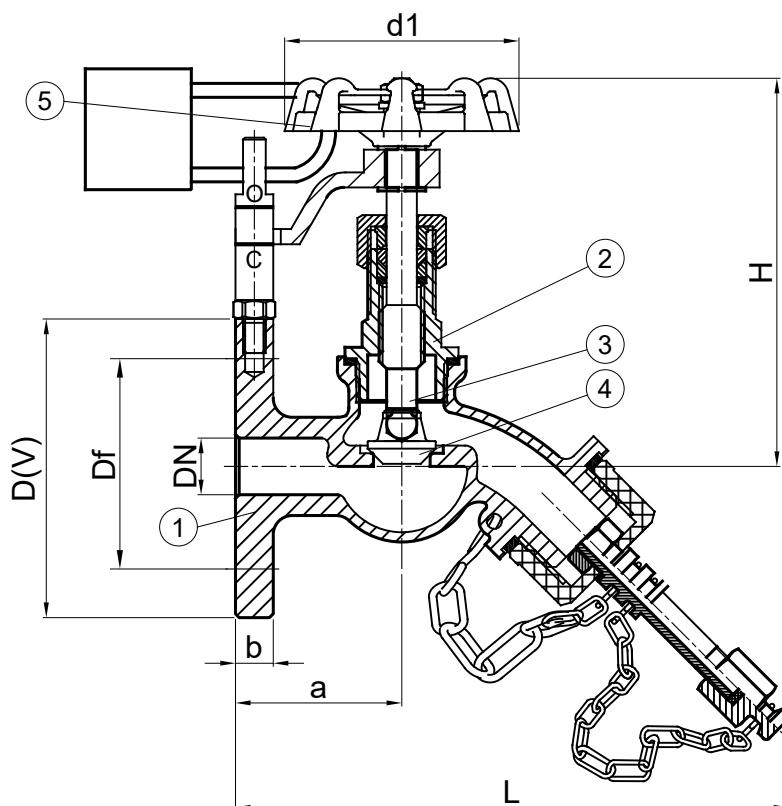

No.	Part	Material
1	Body	W.Nr. 1.4308 / W.Nr. 1.4408
2	Bonnet	W.Nr. 1.4308 / W.Nr. 1.4408
3	Stem	W.Nr. 1.4301
4	Disc	W.Nr. 1.4301
5	Handle Wheel	Ductile iron, Stainless steel, Aluminium casting

Nominal Size	DN mm	15	32
Face to face	L	145	170
Height	H	115	135
Round Flange Ø	D	80	-
Flange bolt diameter	Df	55	90
Square Flange	V	-	90
Handwheel	d ₁	62	80
Lenght	a	44	55
Width of flange	b	10	13
Weight	kg	1.0	2.3

inlet DN 15: rounde flange drilled acc. to DIN PN 6
inlet DN 32: square flange drilled acc. to DIN PN 6

Operating temperature: $t_{min} = -50^{\circ}C$; $t_{max} = +200^{\circ}C$
Suitable for environment temperature $t \geq -50^{\circ}C$