


STAINLESS STEEL GLOBE OUTLET VALVE PN10 DIN 42568

WITH POSITION INDICATOR, LOCKING DEVICE AND SAMPLING PIPE

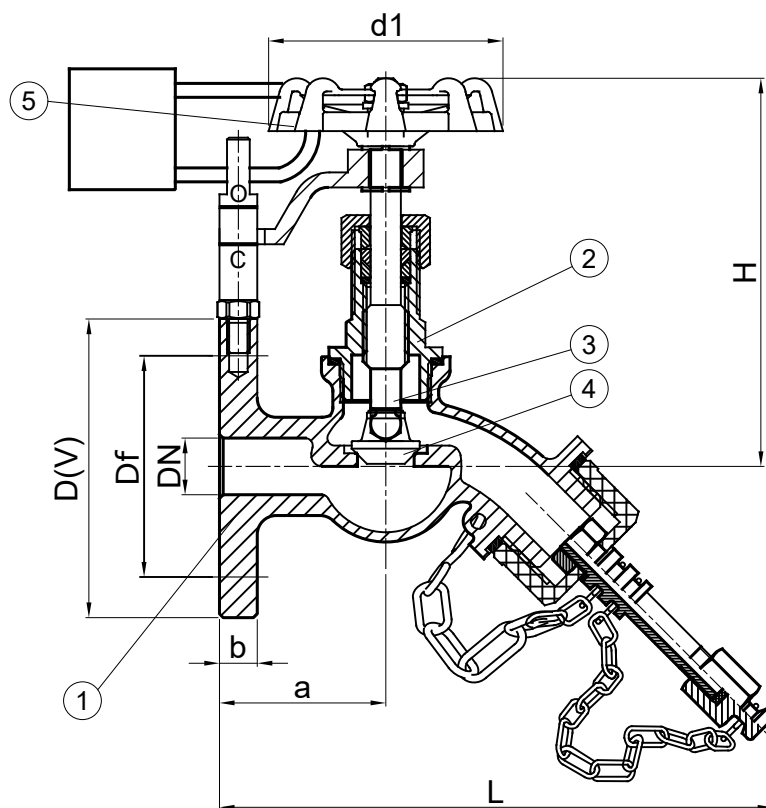

No.	Part	Material
1	Body	W.Nr. 1.4308 / W.Nr. 1.4408
2	Bonnet	W.Nr. 1.4308 / W.Nr. 1.4408
3	Stem	W.Nr. 1.4301
4	Disc	W.Nr. 1.4301
5	Handle Wheel	Ductile iron, Stainless steel, Aluminium casting

Nominal Size	DN mm	15
Face to face	L	145
Height	H	115
Round Flange Ø	D	95
Flange bolt diameter	Df	65
Square Flange	V	-
Handwheel	d ₁	62
Length	a	44
Width of flange	b	10
Weight	kg	1.0

inlet DN 15: round flange drilled acc. to DIN PN 10
inlet DN 32: square flange drilled acc. to DIN PN 10

Operating temperature: t_{min} = -50°C; t_{max} = +200 °C
Suitable for environment temperature t ≥ -50°C