


STAINLESS STEEL GLOBE OUTLET VALVE PN10 DIN 42568

WITH POSITION INDICATOR AND LOCKING DEVICE

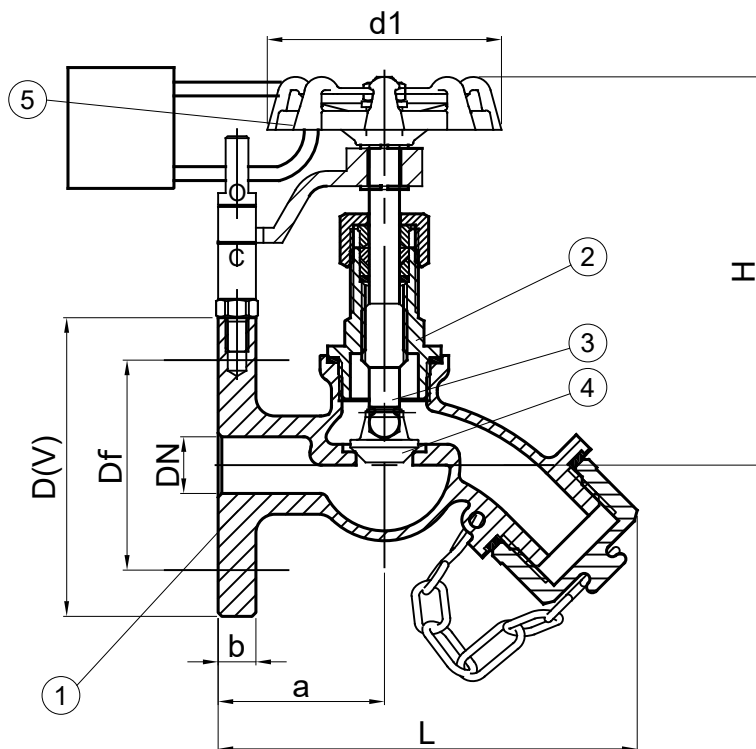

No.	Part	Material
1	Body	W.Nr. 1.4308 / W.Nr. 1.4408
2	Bonnet	W.Nr. 1.4308 / W.Nr. 1.4408
3	Stem	W.Nr. 1.4301
4	Disc	W.Nr. 1.4301
5	Handle Wheel	Ductile iron, stainless steel or aluminium casting

Nominal Size	DN mm	15
Face to face	L	110
Height	H	115
Round Flange Ø	D	95
Flange bolt diameter	Df	65
Square Flange	V	-
Handwheel	d ₁	62
Length	a	44
Width of flange	b	10
Weight	kg	1.1

inlet DN 15: round flange drilled acc. to DIN PN 10
Operating temperature: $t_{min} = -50^{\circ}\text{C}$; $t_{max} = +200^{\circ}\text{C}$
Suitable for environment temperature $t \geq -50^{\circ}\text{C}$