


## DUPLEX GLOBE OUTLET VALVE

WITH POSITION INDICATOR AND LOCKING DEVICE

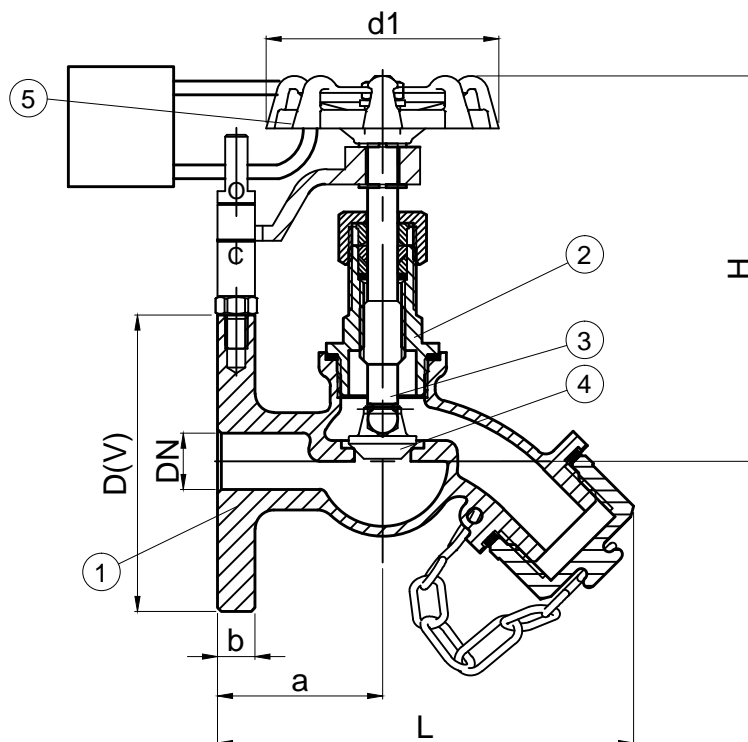

| No. | Part      | Material                        |
|-----|-----------|---------------------------------|
| 1   | Body      | Duplex 1.4470                   |
| 2   | Bonnet    | Duplex 1.4470                   |
| 3   | Stem      | Duplex 1.4462                   |
| 4   | Disc      | Duplex 1.4462                   |
| 5   | Handwheel | SS (Colored) /1.4404(AISI 316L) |

|                 |                |     |
|-----------------|----------------|-----|
| Nominal Size    | DN<br>mm       | 15  |
| Face to face    | L              | 110 |
| Height          | H              | 115 |
| Round Flange Ø  | D              | 80  |
| Square Flange   | v              | -   |
| Handwheel       | d <sub>1</sub> | 62  |
| Length          | a              | 44  |
| Width of flange | b              | 10  |
| Weight          | (kg)           | 1.1 |

Inlet DN 15: round flange drilled acc. to DIN PN 6

Operating temperature: t<sub>min</sub> = -50°C; t<sub>max</sub> = +200 °C  
Suitable for environment temperature t ≥ -50°C