



## **BALL VALVE FOR DGA MONITORING PN16**

- STANDARD HEIGHT -

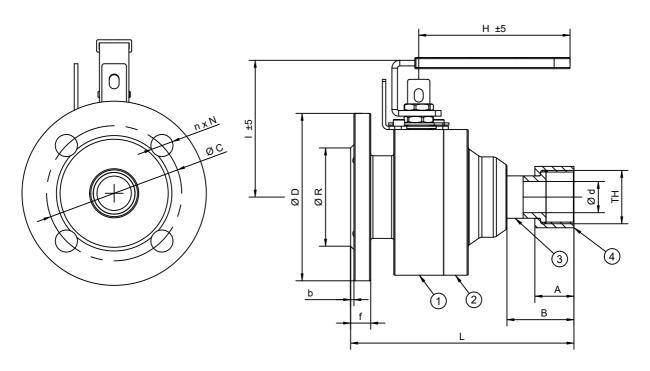

No.	Part	Material
1	Body	Stainless steel 1.4301 / Stainless steel 1.4401
2	Bonnet	Stainless steel 1.4301 / Stainless steel 1.4401
3	Connection	Stainless steel 1.4301 / Stainless steel 1.4401
4	Union nut	Stainless steel 1.4301 / Stainless steel 1.4401 / Brass



Compatible with DGA devices...

	PN 16													
DN	d	D	С	nxN	R	-	Н	f	b	L	A*	B*	TH*	
DN 25	25	115	85	4x14	68	115	115	18	2	185	35	60	3/4" NPT	
DN 40	38	150	110	4x18	88	125	135	18	3	200	35	60	1.5" NPT / G	
DN 50	50	165	125	4x18	102	150	165	20	3	210	35	60	1.5" NPT / G	

Flange dimensions and tolerances according to EN 1092-1 PN16.

<sup>\*</sup> Dimensions A, B and TH can be according to customers request.