

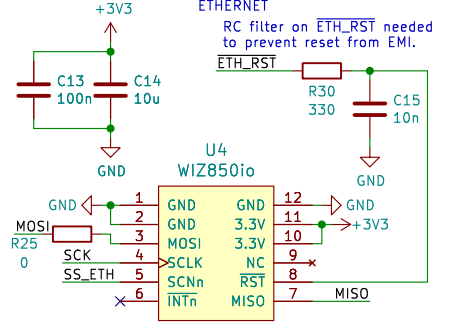

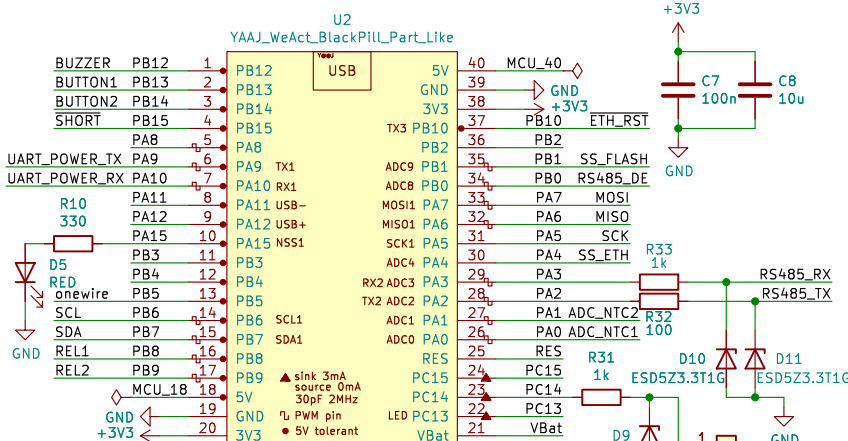








PIN HEADERS FOR FUTURE EXPANSION

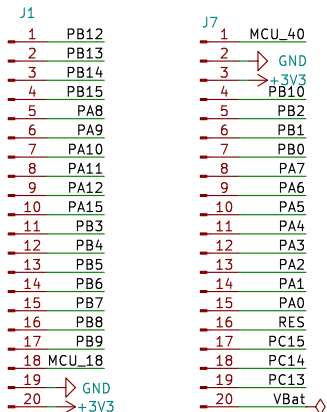




RELAYS AND CONTACTOR
(Although the signal is still named SHORT, the contactor no longer shorts the generator, but rather disconnects it.)

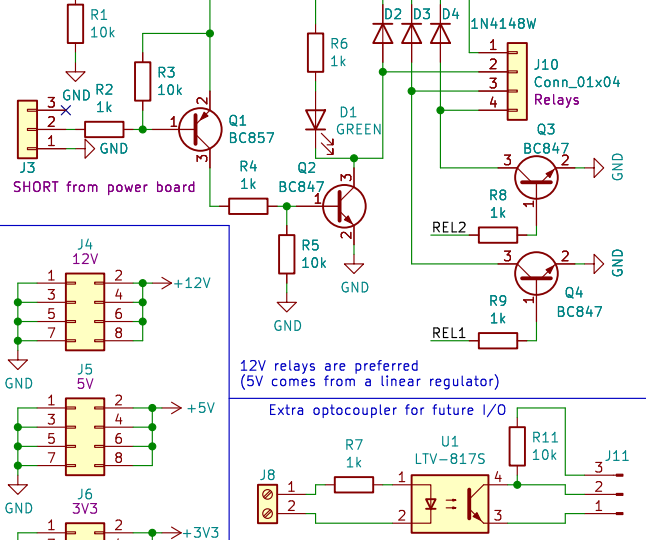

PC13 is used as LED_BUILTIN
PA15, PB3, PB4 JTAG
PA8-PA12 USB
5V pins are directly connected to USB
PB2 is BOOT1 and has 10k pull-down

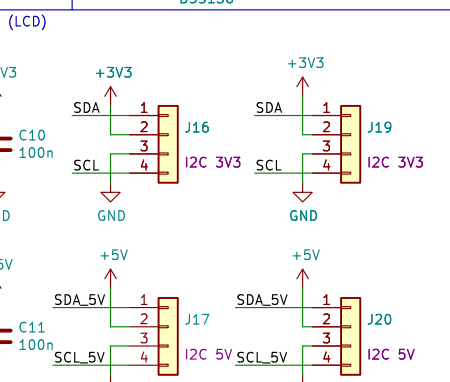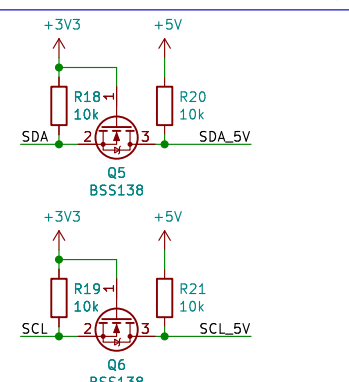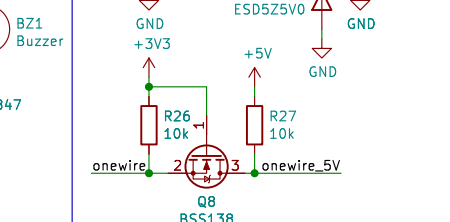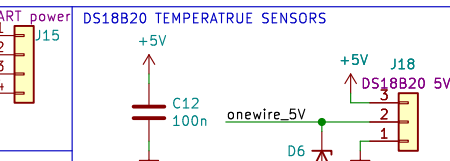

3V3 I2C is for SSD1306 OLED,
5V I2C is for 1602 LCD with PCF8574
SSD1306 probably has shorter lifespan

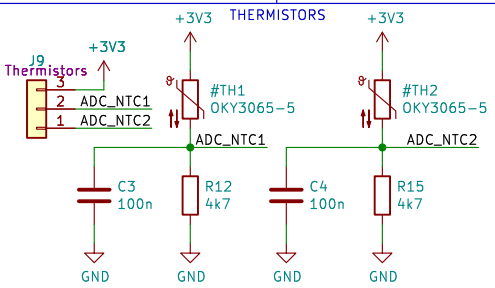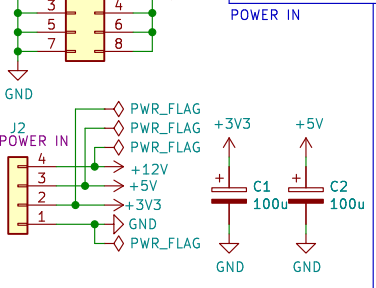

Ondřej Sluka

Sheet: /
File: vetrnik-control.kicad_sch

Title: vetrnik-control

Size: A4 Date: Rev: 1/1