

1

Begin with lid top upside-down, large stainless steel standoffs at rear.

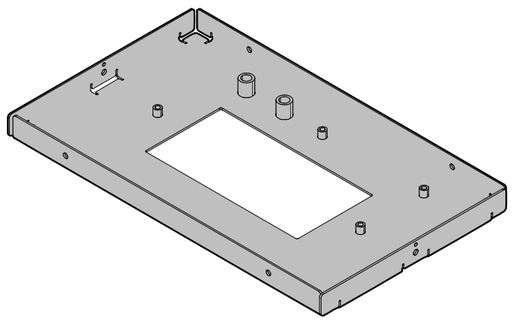


2

Insert lid frame into lid top. Frame sides sit inside lid top; round corner cutouts face up.

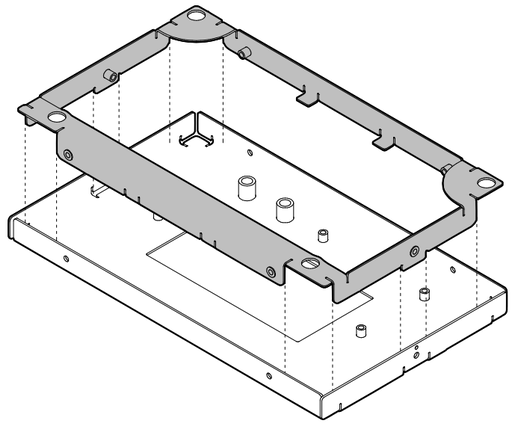


3

Secure lid frame with screws. Install latch tops and secure with screws. Align anti-rotation bosses with small holes in lid top before tightening.

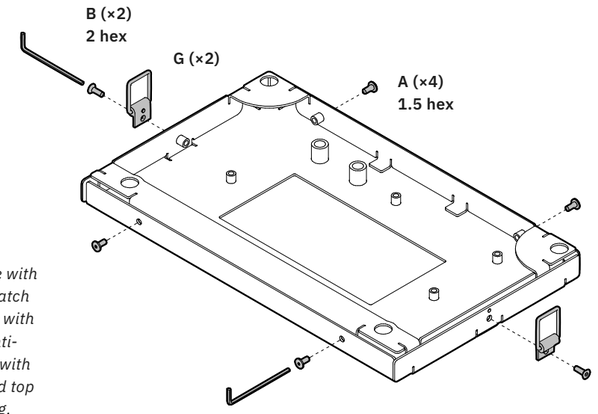


4

Place strap handle on standoffs, smooth side down. Place tool sleeve on standoffs, flap side up.

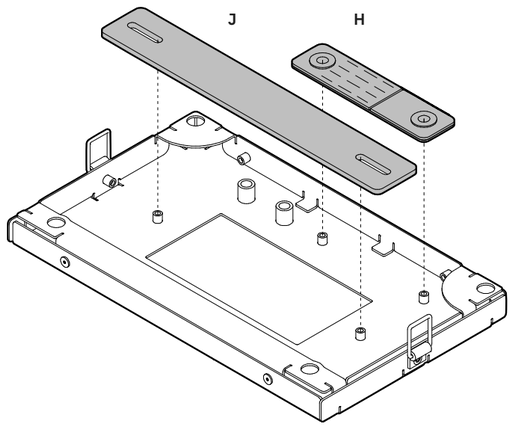


5

Place handle cover over strap handle, aligning screw holes with standoffs.

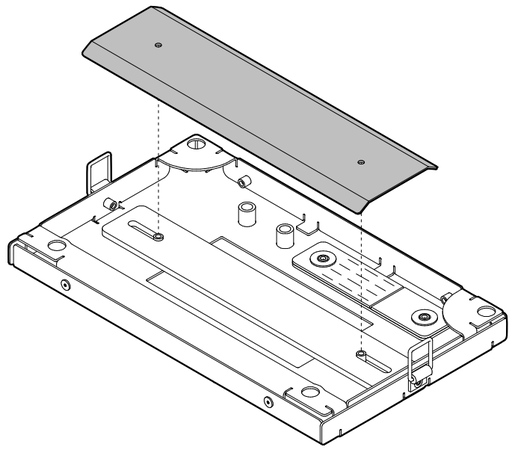


6

Secure handle cover with screws. Secure tool sleeve with thumbscrews.

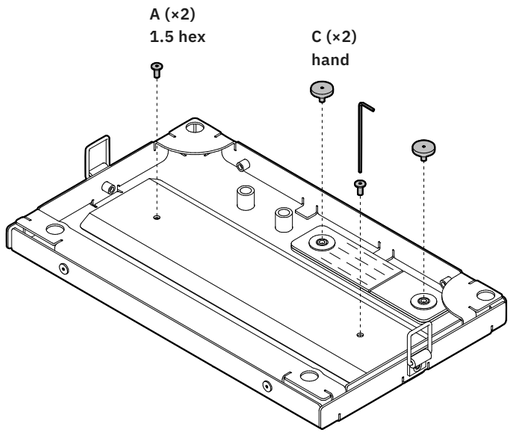


7

Install feet in round corner cutouts. Store MID.1 riser feet in large stainless steel standoffs when not in use.

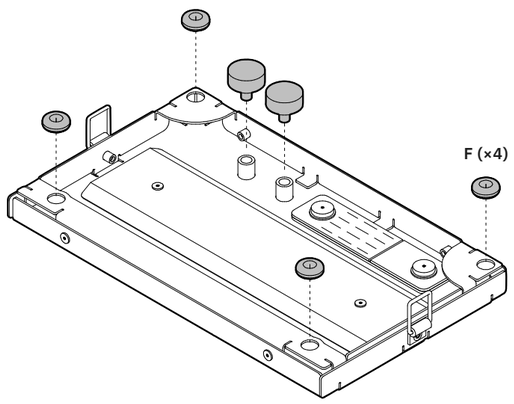


8

MID.1.LID assembly complete. Remaining steps involve MID.1.

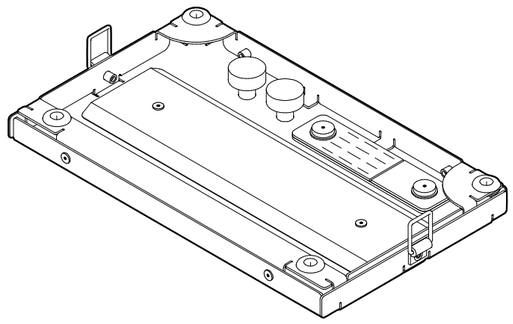


9

Flip MID.1.LID over; set aside.

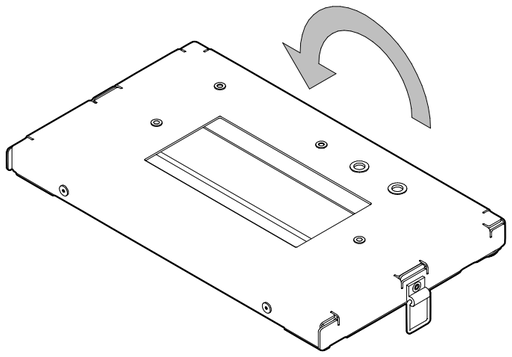


10

Install latch bottoms on MID.1 and secure with screws. Align anti-rotation bosses with small holes in bottom case before tightening.

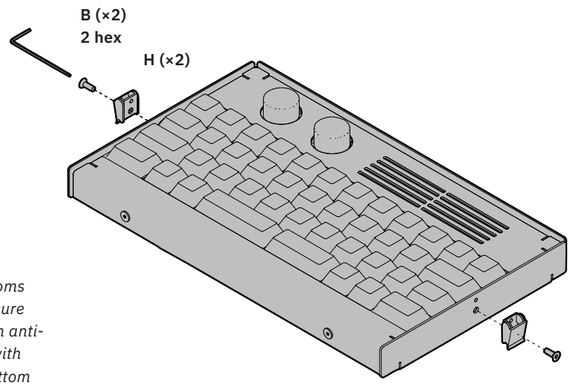

11


Orient MID.1.LID with large stainless steel standoffs at rear of MID.1. Lower into place; lid frame and feet sit within MID.1 side walls.

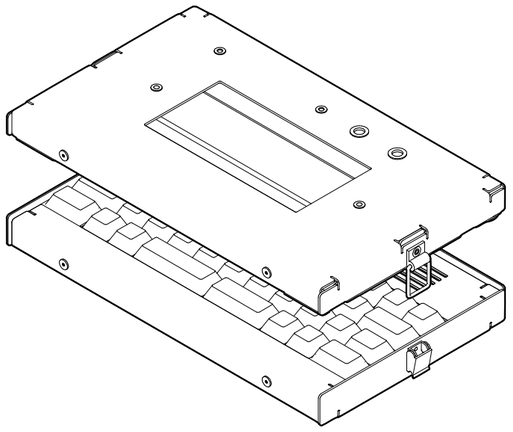

12


Latch MID.1.LID to MID.1.

Nice work! Your MID.1.LID is ready to go.

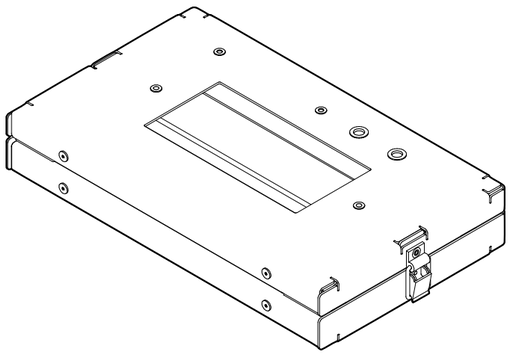

MID.1.LID

Latching Input Deflector
Owner's Manual
A.Okay!

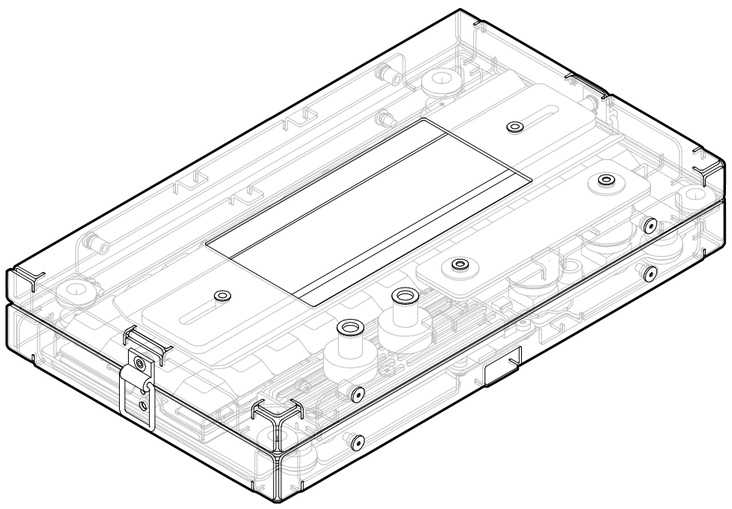

In the box

- *Lid top*
- *Lid frame*
- *Feet*
- *Case screws*
- *Latches*
- *Latch screws*
- *Strap handle*
- *Handle cover*
- *Tool sleeve*
- *Tool sleeve thumbscrews*

Specifications

Materials	
Case	*Powder-coated stainless steel*
Hardware	*Stainless steel*
Feet	*Synthetic rubber*
Strap handle	*Horween Dublin vegetable-tanned leather*
Tool sleeve	*Horween Dublin vegetable-tanned leather, stainless steel hardware*
Dimensions	
Size (W × D × H)	*235 × 141 × 21 mm 9-1/4 × 5-9/16 × 3/4 in*
Weight	*657 g | 1.4 lbs*

Care

General care

MID.1.LID is designed for daily use and long-term maintenance. Powder-coated surfaces are durable but not scratch-proof; avoid sharp or abrasive materials.

Cleaning

Wipe with a soft, dry cloth. For grime, use a damp cloth with mild soap if necessary; dry immediately.

Service and repairs

Standard components and mechanical fasteners throughout; no adhesives. Worn parts can be replaced by hand or with common tools. For troubleshooting or repair guidance:

hello@aokay.cool

Replacement parts

Feet, screws, and other replacement parts are available at aokay.cool when possible.

Leather care

Natural wear and subtle sheen may develop with use; this is normal.

Keep dry when possible. If wet, blot with a clean cloth and air-dry away from heat and direct sunlight.

Light cleaning. Wipe with a dry or slightly damp cloth; air-dry. Avoid alcohol, solvents, and harsh cleaners.

Conditioning (optional). If leather feels dry, apply a small amount of neutral leather conditioner, then buff. Avoid over-conditioning; it can soften leather and alter the finish.

Disposal

Parts and materials were selected in part for recyclability. Recycle where possible.

Notes

Support

hello@aokay.cool
aokay.cool

Warranty

1-year limited warranty covering manufacturing defects from date of receipt. Excludes misuse, modification, accidents, and normal wear.

Made by A.Okay! in Seattle, USA

Product design, packaging design, engineering, leatherwork, assembly, inspection

With contributions from:

SendCutSend	Sheet metal fabrication Reno, USA
Arka	Packaging fabrication San Francisco, USA
Girlie Press	Printing Seattle, USA

Personal thanks

- Interest check respondents — early signal and candid feedback
- Seattle keyboard community — encouragement, meetups, and inclusiveness
- flo — encouragement and sharp design feedback, from the big idea to this poster

Assembly instructions

Overview

Assembly uses the 1.5 mm and 2 mm hex keys included with MID.1. Tool sleeve stores both when finished. Assembly also installs two latches on MID.1.

Work surface

Place a desk mat, cloth, or towel beneath parts to protect case surfaces during assembly.

Installing fasteners

Do not overtighten; firm, moderate torque is sufficient.

Fastener thread paste

Optional. Apply a tiny amount to screw threads to reduce friction and help prevent seizing. Run screw in and out once to distribute.

Drawing scale


Tools and fasteners below shown at 1:1 scale. Compare directly to identify correct part for each step.

Fasteners


A Case screws (×6)
Tighten with 1.5 mm hex key

B Latch screws (×4)
Tighten with 2 mm hex key


C Tool sleeve thumbscrews (×2)
Tighten by hand



A
1.5 hex



B
2 hex




C
hand

Tools (included with MID.1)

D 1.5 mm hex key

E 2 mm hex key

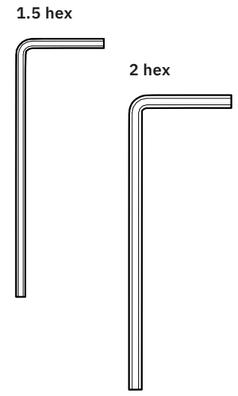

Other components


F Case feet (×4)
Install by pressing partially through hole, then pulling through from opposite side

G Latch top (×2)

H Latch bottom (×2)


I Tool sleeve (×1)

J Strap handle (×1)





I
(50% scale)



J
(50% scale)