

PC/104 Specification

Version 2.4

August 2001

Please Note

This specification is subject to change without notice. While every effort has been made to ensure the accuracy of the material contained within this document, the PC/104 Embedded Consortium shall under no circumstances be liable for incidental or consequential damages or related expenses resulting from the use of this specification. If errors are found, please notify the PC/104 Consortium.

PC/104 and **PC/104-Plus** are trademarks of the PC/104 Embedded Consortium. All other marks are the property of their respective companies.

Copyright 1992-2001, PC/104 Embedded Consortium

REVISION HISTORY

Version 1.0, March 1992 - Initial release.

Version 2.1, July 1994 - Revised specification incorporating changes to conform with IEEE P996.1 draft version D1.00:

- a. Changed bus options. Eliminated the "option 2" configurations having right-angle P1 and P2 connectors. Created new "option 2" configurations similar to "option 1," but without the stackthrough pins. Added a statement indicating that a P2 connector may be included on 8-bit modules, if desired.
- b. Added two additional mounting holes to 8-bit bus versions, making the mounting hole patterns of both 8- and 16-bit modules identical.
- c. Added an I/O connector region along the bus edge of the module.
- d. Increased widths of I/O mating-connector regions from 0.4" to 0.5".
- e. Changed lengths of I/O mating-connector regions so that their edges align with the outer edges of the annular rings of adjacent mounting holes.
- f. Reduced the bus drive requirement on the signals that had been specified at 6 mA to 4 mA.
- g. Added specification of module power requirements.
- h. In Appendix C, Section 3, changed minimum value of pullup resistance on shared interrupt line from 10K to 15K ohms.
- i. Added a section defining levels of PC/104 conformance.

Version 2.2, September 1994

- a. Added correction sheet showing revised schematic for Appendix C.

Version 2.3, June 1996

- a. Incorporated correction to Appendix C schematic.
- b. Changed P2 connector Pin 1 designation in 16-bit module dimension drawings.
- c. Added metric dimensions, including metric versions of module dimension drawings.
- d. Minor formatting changes.

Version 2.4, August 2001

- a. Added Appendix D Connector Specifications.
- b. Removed all specific company references.
- c. Corrected Consortium address and phone numbers
- d. Added new reference for ISA specification
- e. Cleaned up mechanical drawings

TABLE OF CONTENTS

1. INTRODUCTION	1
2. MECHANICAL SPECIFICATIONS	3
2.1 Module Dimensions	3
2.2 Bus Options	3
3. ELECTRICAL SPECIFICATIONS	5
3.1 Signal Functions and Assignments	5
3.1.1 Signal Definitions	5
3.1.2 Signal Assignments	5
3.1.3 Added Grounds	5
3.1.4 Key Locations	5
3.2 AC Signal Timing	5
3.3 DC Signal Levels	5
3.4 Bus Drive Current	6
3.5 Interrupt-Sharing Option	6
3.6 Bus Termination Option	6
3.7 Module Power Requirements	7
4. LEVELS OF CONFORMANCE	7
4.1 PC/104 "Compliant"	7
4.2 PC/104 "Bus-compatible"	7
APPENDICES	
A. Module Dimensions	A-1
A.1 PC/104 16-Bit Module Dimensions (English)	A-2
A.2 PC/104 16-Bit Module Dimensions (Metric)	A-3
A.3 PC/104 8-bit Module Dimensions (English)	A-4
A.4 PC/104 8-bit Module Dimensions (Metric)	A-5
B. Bus Signal Assignments	B-1
C. Interrupt-Sharing Option	C-1
C.1 Introduction	C-2
C.2 Recommended Circuit	C-2
C.3 Restrictions	C-2
C.4 "ISA Compatibility" Option Jumper	C-3
D. Connector Specifications	D-1
D.1 PC/104 8-Bit and 16-Bit Connector Dimensions	D-2
D.2 PC/104 8-Bit and 16-Bit Connector Specifications	D-3

(This page left blank intentionally)

PC/104 SPECIFICATION

Version 2.4 – August 2001

1. INTRODUCTION

While the PC and PC/AT architectures have become extremely popular in both general purpose (desktop) and dedicated (non-desktop) applications, its use in *embedded* microcomputer applications has been limited due to the large size of standard PC and PC/AT motherboards and expansion cards.

This document supplies the mechanical and electrical specifications for a compact version of the ISA (PC and PC/AT) bus, optimized for the unique requirements of embedded systems applications. The specification is herein referred to as "PC/104", based on the 104 signal contacts on the two bus connectors (64 pins on P1, plus 40 pins on P2).

Briefly, the needs of embedded applications have been satisfied by PC/104, through the following key differences from standard ISA bus:

- Reducing the form-factor, to 3.550 by 3.775 inches (90 by 96 mm).
- Eliminating the need for backplanes or card cages, through its self-stacking bus.
- Minimizing component count and power consumption (to typically 1-2 Watts per module), by reducing required bus drive on most signals to 4 mA.

PC/104 specifies two module versions — 8-bit and 16-bit — which correspond to the PC and PC/AT bus implementations, respectively.

The remainder of this specification covers the *differences* from the ISA bus as detailed in Edward Solari's book ISA and EISA Theory and Operation published by Annabooks. Designers of modules and systems based on PC/104 should be familiar with the ISA specification. It is available from:

Annabooks
12860 Danielson Court
Poway, CA USA 92064
Tel 800.462.1042 or 858.435.2000
Fax 858.391.5616
On the web at <http://www.annabooks.com>

If errors are found in this document, please send a written copy of the suggested corrections to:

PC/104 Embedded Consortium

1060 North Fourth Street

San Jose, CA USA 95112

Tel 650.903.8304

Fax 408.999.0344

E-mail info@pc104.org

On the web at <http://www.pc104.org>

2. MECHANICAL SPECIFICATIONS

2.1 Module Dimensions

PC/104 modules can be of two bus types, 8-bit and 16-bit. These correspond to the PC and PC/AT buses, respectively. The detailed mechanical dimensions of these two PC/104 bus types are provided in Appendix A.

2.2 Bus Options

As shown in the figures in Appendix A, each of the two bus types (8-bit and 16-bit) offers two *bus options*, according to whether or not the P1 and P2 bus connectors extend through the module as "stackthrough" connectors. These options are provided to help meet the tight space requirements of embedded applications.

Figure 1 illustrates a typical module stack including both 8- and 16-bit modules, and shows the use of both the "stackthrough" and "non-stackthrough" bus options. As shown in Figure 1, when 8- and 16-bit modules are combined in a stack, the 16-bit modules must be stacked below (i.e., on the "secondary side" of) the 8-bit modules. A "passive" P2 bus connector may optionally be included in the design of 8-bit modules, to allow the use of these modules anywhere in a stack.

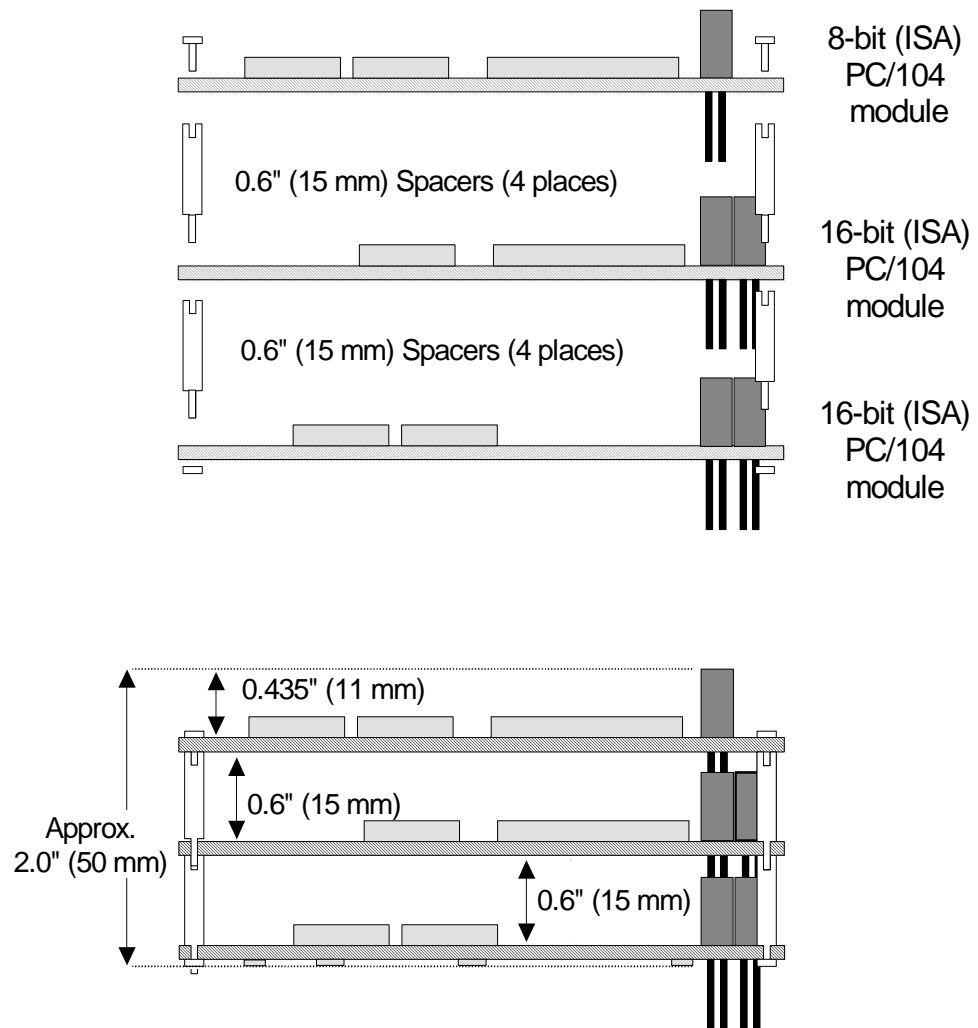


Figure 1. Typical Module Stack

3. ELECTRICAL SPECIFICATIONS

3.1 Signal Functions and Assignments

3.1.1 Signal Definitions

All PC/104 bus signals are identical in definition and function to their ISA counterparts.

3.1.2 Signal Assignments

Signals are assigned in the same order as on the edgecard connectors of ISA, but transformed to the corresponding header connector pins. Signal assignments for the J1/P1 and J2/P2 connectors are given in Appendix B.

3.1.3 Added Grounds

Several ground pins have been added, to maximize bus integrity. See Appendix B.

3.1.4 Key Locations

Key locations - consisting of omitted pins on P1 and P2, and plugged holes on J1 and J2 - have been designated on each bus connector, to help assure proper connector mating. See Appendix B.

3.2 AC Signal Timing

All PC/104 bus signals are identical in signal timing to their ISA counterparts.

3.3 DC Signal Levels

All PC/104 bus signal DC logic high and logic low voltage levels are identical to their ISA counterparts.

3.4 Bus Drive Current

To reduce component count and minimize power consumption and heat dissipation most bus signals have a reduced bus drive requirement of 4 mA. The exception is open collector driven signals which must drive 330 ohm pullup resistors defined by the ISA specification. This allows direct driving of the bus by many ASIC devices, and by HCT family logic.

Specifically, the following signals must be driven with devices capable of providing 20 mA sink current (as indicated in ISA):

MEMCS16*
IOCS16*
MASTER*
ENDXFR*

All other signals may be driven with devices capable of providing 4 mA sink current.

3.5 Interrupt-Sharing Option

The ISA specification briefly mentions an optional means to share a single bus interrupt line among multiple interrupting devices. Appendix C provides a design guideline which can help ensure compatibility of interrupt-sharing among PC/104 modules.

3.6 Bus Termination Option

As in ISA, termination of the PC/104 bus signals may be desired in some systems to increase data integrity and system reliability. When termination is included, *AC termination* networks must be used to provide termination close to the characteristic impedance of the signal lines without exceeding the DC output current capabilities of the drivers.

As in the ISA specification, the recommended network consists of a resistor-capacitor network of 40-60 ohms in series with 30-70 pF, connected between each bus signal and ground.

Whether termination is needed, and where it should be located, is dependent on the specific system configuration and must be determined by the system designer.

3.7 Module Power Requirements

The operating voltage range and maximum power requirements of each module are given in Table 1. Each module shall not draw more than the operating current indicated. The total power requirement of a PC/104 module stack is the sum of that required by each of the modules in the stack. Operating voltages, which refer to the voltage measured at the appropriate bus connector pins of any given module, are specified to ± 5 percent. Only those voltages required by modules in a system need be supplied to the bus.

Table 1. Module Power Requirements

Nominal Voltage	Maximum Voltage	Minimum Voltage	Maximum Current
+12 Volts	+12.6 Volts	+11.4 Volts	1.0 Amp
+5 Volts	+5.25 Volts	+4.75 Volts	2.0 Amp
-5 Volts	-4.75 Volts	-5.25 Volts	0.2 Amp
-12 Volts	-11.4 Volts	-12.6 Volts	0.3 Amp

4. LEVELS OF CONFORMANCE

This section provides terminology intended to assist manufacturers and users of PC/104 bus-compatible products in defining and specifying conformance with the PC/104 Specification.

4.1 PC/104 "Compliant"

This refers to "PC/104 form-factor" devices that conform to all non-optional aspects of the PC/104 Specification, including both *mechanical* and *electrical* specifications.

4.2 PC/104 "Bus-compatible"

This refers to devices which are not "PC/104 form-factor" (i.e., do not comply with the module dimensions of the PC/104 Specification), but provide a male or female PC/104 *bus connector* that meets both the *mechanical* and *electrical* specifications provided for the PC/104 bus connector.

(This page left blank intentionally)

APPENDIX A


MODULE DIMENSIONS

Dimensions are in inches.




PC/104 16-BIT MODULE DIMENSIONS (METRIC)

Dimensions are in millimeters.

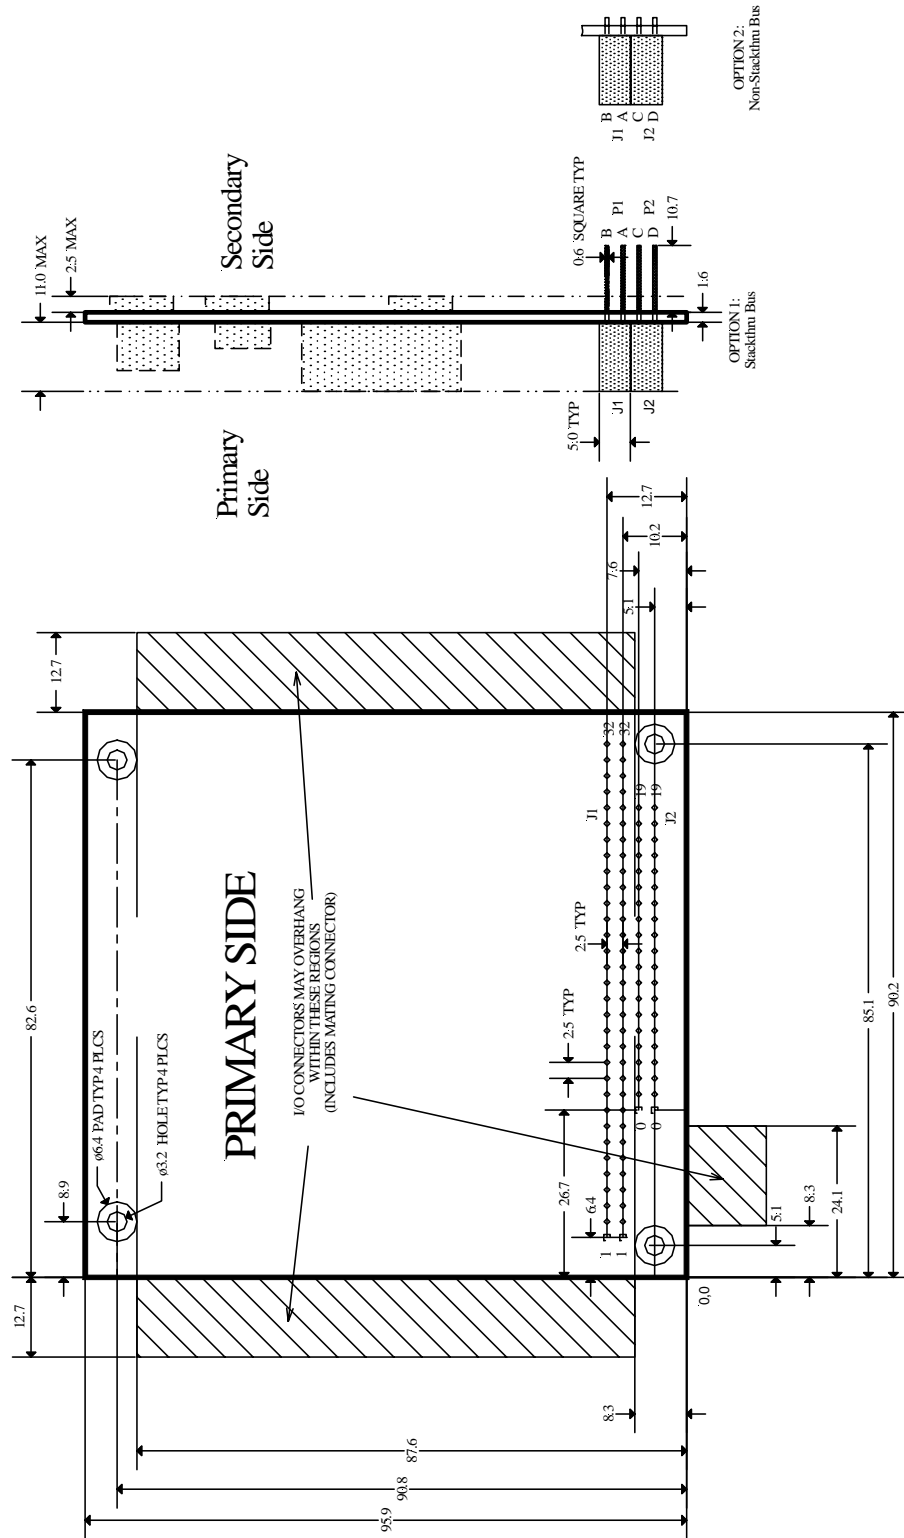


PC/104 8-BIT MODULE DIMENSIONS (ENGLISH)

Dimensions are in inches.

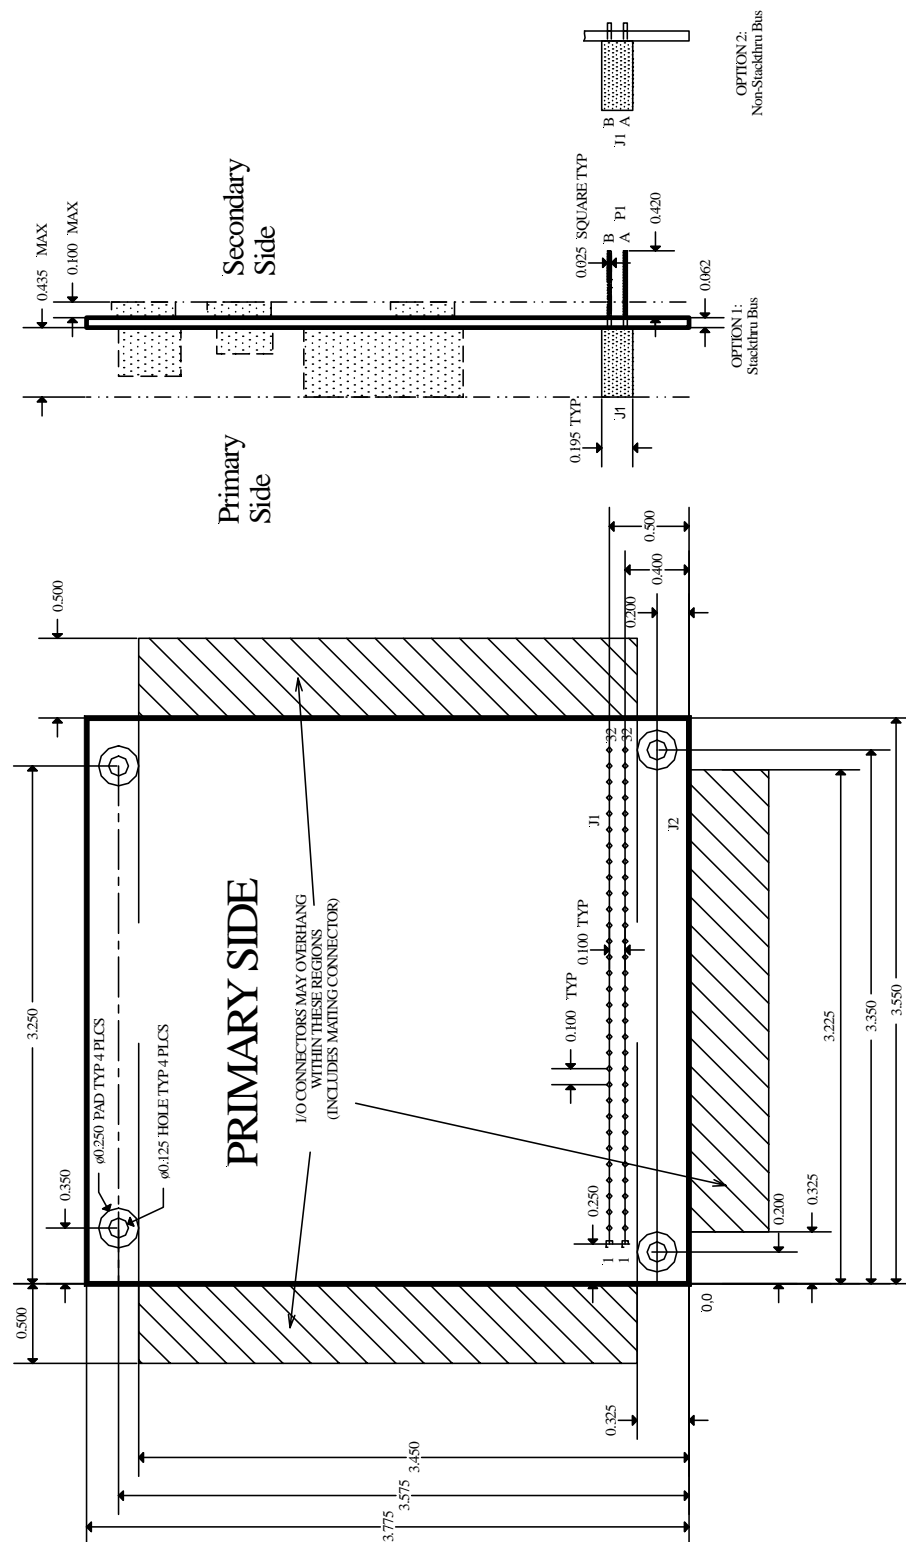

PC/104 8-BIT MODULE DIMENSIONS (METRIC)

Dimensions are in millimeters.

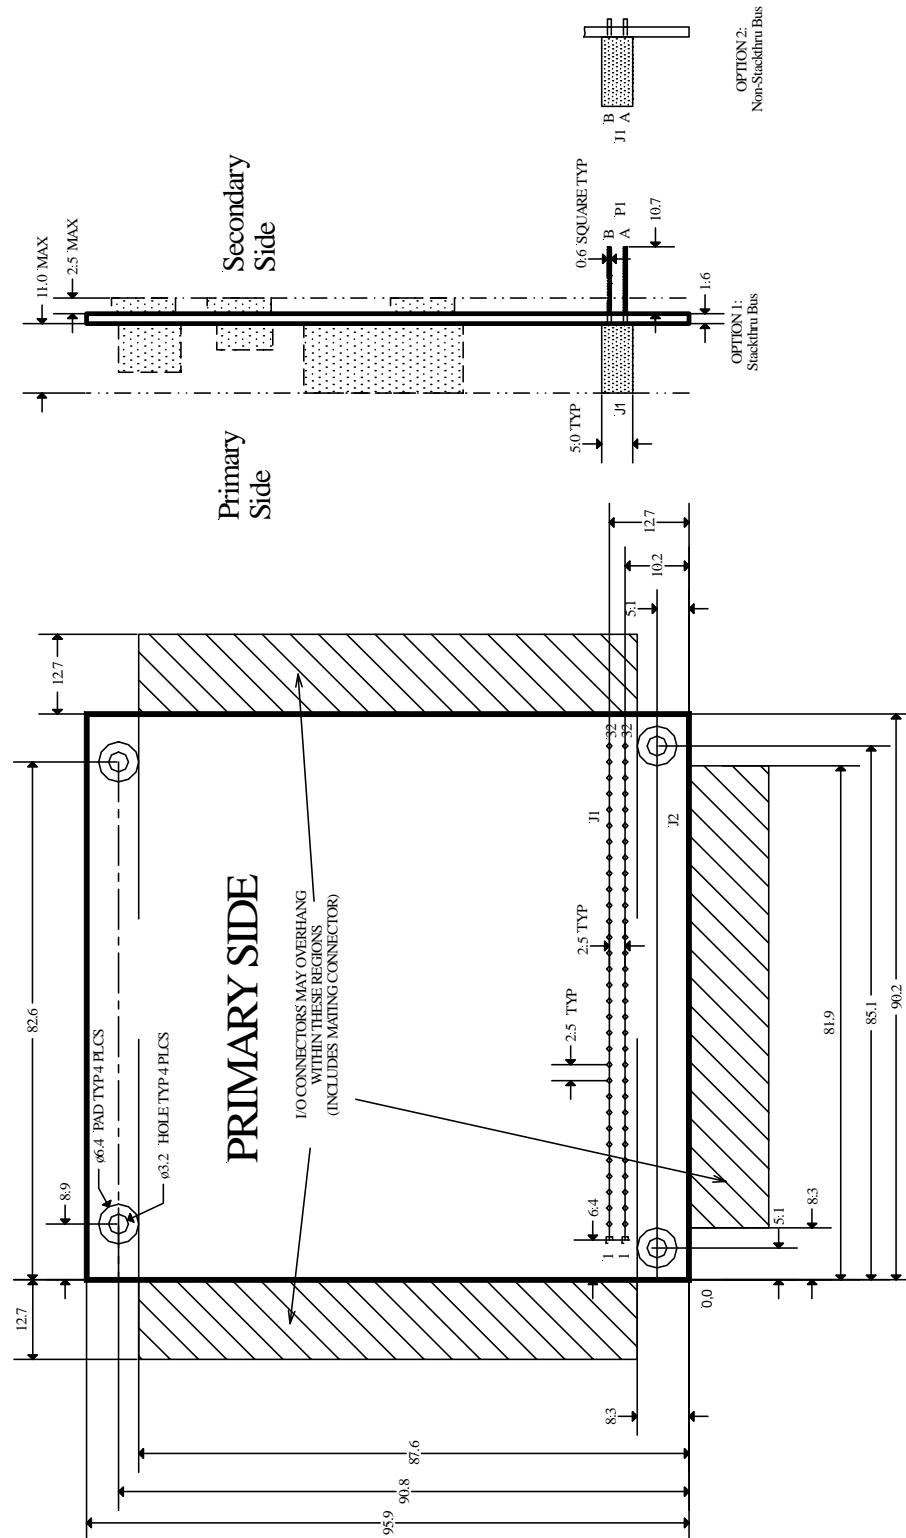

(This page left blank intentionally)

APPENDIX B

BUS SIGNAL ASSIGNMENTS

Appendix B. PC/104 Bus Signal Assignments

<u>Pin Number</u>	<u>J1/P1 Row A</u>	<u>J1/P1 Row B</u>	<u>J2/P2 Row C¹</u>	<u>J2/P2 Row D¹</u>
0	--	--	GND	GND
1	IOCHCHK*	GND	SBHE*	MEMCS16*
2	SD7	RESETDRV	LA23	IOCS16*
3	SD6	+5V	LA22	IRQ10
4	SD5	IRQ9	LA21	IRQ11
5	SD4	-5V	LA20	IRQ12
6	SD3	DRQ2	LA19	IRQ15
7	SD2	-12V	LA18	IRQ14
8	SD1	ENDXFR*	LA17	DACK0*
9	SD0	+12V	MEMR*	DRQ0
10	IOCHRDY	(KEY) ²	MEMW*	DACK5*
11	AEN	SMEMW*	SD8	DRQ5
12	SA19	SMEMR*	SD9	DACK6*
13	SA18	IOW*	SD10	DRQ6
14	SA17	IOR*	SD11	DACK7*
15	SA16	DACK3*	SD12	DRQ7
16	SA15	DRQ3	SD13	+5V
17	SA14	DACK1*	SD14	MASTER*
18	SA13	DRQ1	SD15	GND
19	SA12	REFRESH*	(KEY) ²	GND
20	SA11	SYSCLK	--	--
21	SA10	IRQ7	--	--
22	SA9	IRQ6	--	--
23	SA8	IRQ5	--	--
24	SA7	IRQ4	--	--
25	SA6	IRQ3	--	--
26	SA5	DACK2*	--	--
27	SA4	TC	--	--
28	SA3	BALE	--	--
29	SA2	+5V	--	--
30	SA1	OSC	--	--
31	SA0	GND	--	--
32	GND	GND	--	--

NOTES:

1. Rows C and D are not required on 8-bit modules. See Section 2.2.
2. B10 and C19 are key locations. See Section 3.1.4.
3. Signal timing and function are as specified in ISA specification.
4. Signal source/sink current differ from ISA values. See Section 3.4.

APPENDIX C

INTERRUPT-SHARING OPTION

APPENDIX C

INTERRUPT-SHARING OPTION

C.1 Introduction


The Interrupt Request lines (IRQn's) on the ISA bus are *active high*. Consequently, the usual technique of wire-ORing open-collector driven *active low* bus signals cannot be used for interrupt-sharing in the PC bus architecture.

The ISA specification briefly mentions an optional means to share a single bus interrupt line among multiple interrupting devices. This appendix provides design guidelines which can help assure compatibility of interrupt-sharing among PC/104 modules.

C.2 Recommended Circuit

A circuit similar to that shown in the figure below can provide interrupt-sharing of the *active high* IRQ signals on the ISA bus, given a few system-level restrictions (see below).

NOTE: This recommendation does not comply with the ISA specification, since it is not possible to implement interrupt-sharing in an ISA compatible manner.

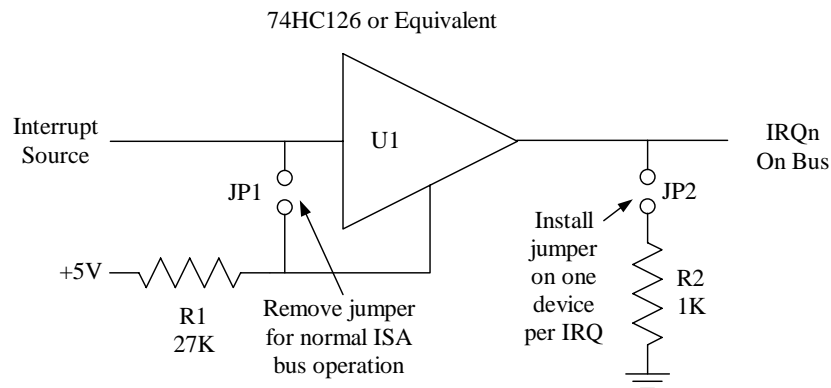

Typical Interrupt-Sharing Circuit

C.3 Restrictions

All bus devices sharing a common interrupt must be equipped with a suitable interrupt-sharing circuit (see the Figure, above) and must meet the following two restrictions:

- The interrupt line being shared must not have a pullup resistance (to +5 volts) less than 15K ohms anywhere in the system. (Typically, the pullup resistance is located on the CPU module, so this is generally a restriction on the design of the CPU module.) Resistive bus termination will generally violate this restriction; use AC termination instead (Section 3.6).
- The interrupt line being shared must have one (and only one) pulldown resistor (1K ohms) connected between the IRQ line and ground. Resistive bus termination will generally violate this restriction; use AC termination instead.

C.4 "ISA Compatibility" Option Jumper

The ISA specification calls for using a 2.2K pullup resistor on each of the IRQ lines, which violates the 15K minimum pullup resistance allowed with the recommended interrupt-sharing circuit. In systems having this value of pullup, devices with the circuit shown in the above figure can be made compatible by disabling their interrupt-sharing circuit. This is accomplished by unshorting both JP1 and JP2, resulting in a normal ISA (non-shared) interrupt configuration (but with the reduced bus drive common to other PC/104 bus signals).

(This page left blank intentionally)

APPENDIX D


CONNECTOR SPECIFICATIONS

PC/104 8-BIT AND 16-BIT CONNECTOR DIMENSIONS

NOTES:

1 PRESS FIT COMPLIANT PINS PER DIN 41612 PART 5 AND IEC 352-5 CAN BE USED INSTEAD OF SQUARE PINS AS SHOWN.

2 CONFIGURATION CAN BE MADE OF ONE OR MORE PIECES.

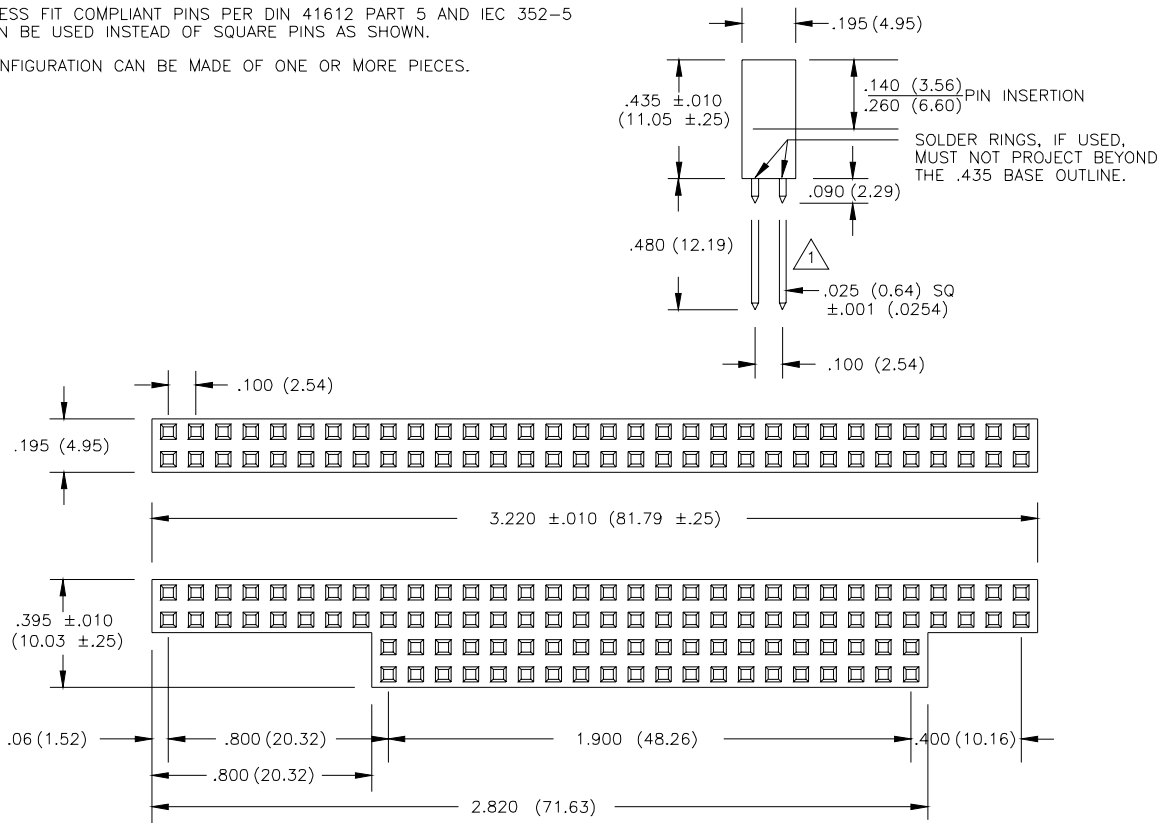

PC/104 8-BIT AND 16-BIT CONNECTOR SPECIFICATIONS

MATERIALS

HOUSING:	HIGH TEMP THERMOPLASTIC, UL RATED 94-V0
CONTACT:	PHOSPHOR BRONZE
SOLDER:	TIN-LEAD (63-37), IF APPLICABLE
SOLDER CLIP:	ALUMINUM ALLOY, IF APPLICABLE

CONTACT FINISH

FEMALE INTERFACE:	20 MICROINCHES MINIMUM HARD GOLD
MALE INTERFACE:	GOLD FLASH MINIMUM
SOLDER TAIL:	100 MICROINCHES MINIMUM SOLDER
UNDERPLATE:	50 MICROINCHES MINIMUM NICKEL

MECHANICAL PERFORMANCE

INSERTION FORCE:	3.5 OUNCE PER PIN MAXIMUM
WITHDRAW FORCE:	1 OUNCE MINIMUM AVERAGE
NORMAL FORCE:	50 GRAMS MINIMUM (PER BEAM)
DURABILITY:	50 CYCLES MINIMUM
OPERATING TEMP:	-55° C TO +85° C

ELECTRICAL PERFORMANCE

CONTACT RESISTANCE:	<30 MILLIOHMS MAXIMUM
CURRENT CAPACITY:	1 AMP CONTINUOUS PER PIN
DIELECTRIC STRENGTH:	1000 VAC
INSULATION RESISTANCE:	5,000 MEGOHMS MINIMUM