PRACTICE 2.

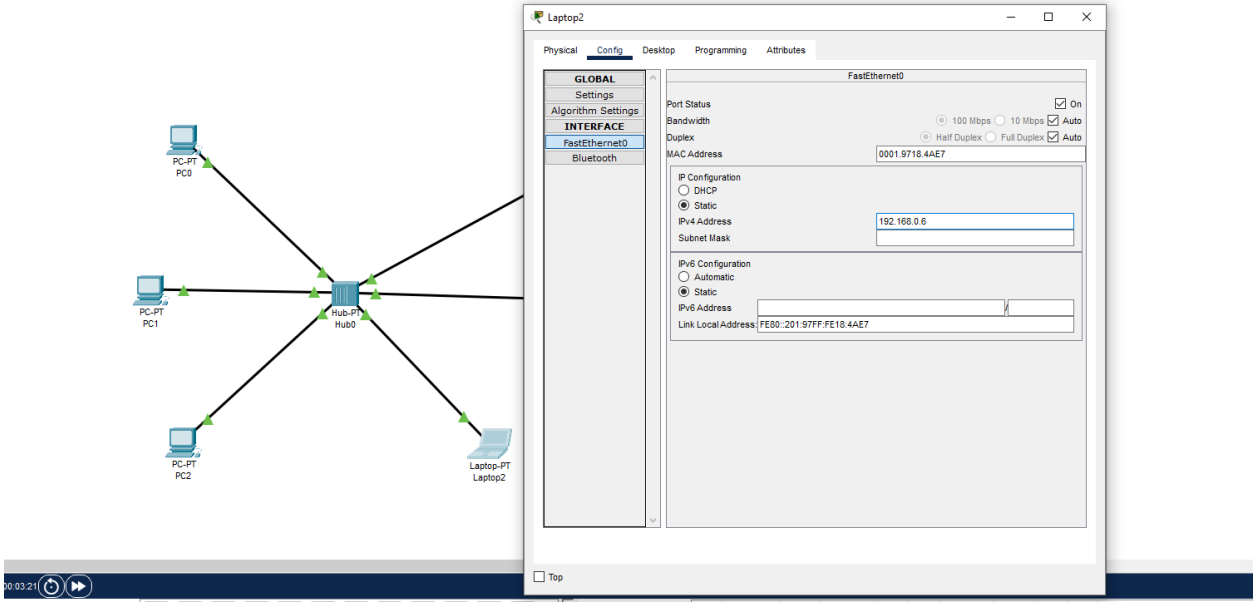
PC-PT
PC0
PC-PT
PC1
PC-PT
PC2
Hub-PT
Hub0
Laptop-PT
Laptop2
Laptop2
Physical
Config
Desktop
Programming
Attributes
GLOBAL
Settings
Algorithm Settings
INTERFACE
FastEthernet0
Bluetooth
FastEthernet0
Port Status
On
Bandwidth
100 Mbps
10 Mbps
Auto
Duplex
Half Duplex
Full Duplex
Auto
MAC Address
0001.9718.4AE7
IP Configuration
DHCP
Static
IPv4 Address
192.168.0.6
Subnet Mask
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::201:97FF:FE18:4AE7
Top

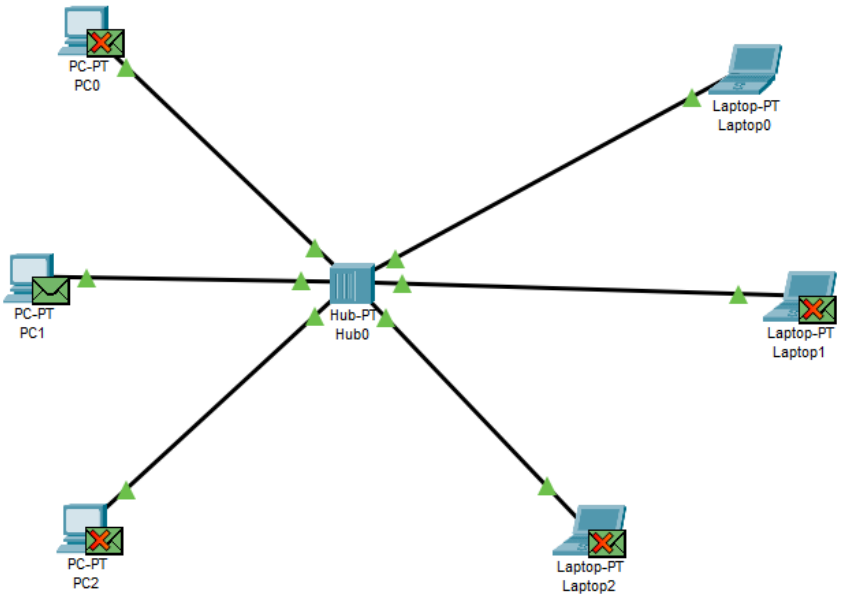
PC-PT
PC0
Laptop-PT
Laptop0
PC-PT
PC1
Hub-PT
Hub0
Laptop-PT
Laptop1
PC-PT
PC2
Laptop-PT
Laptop2

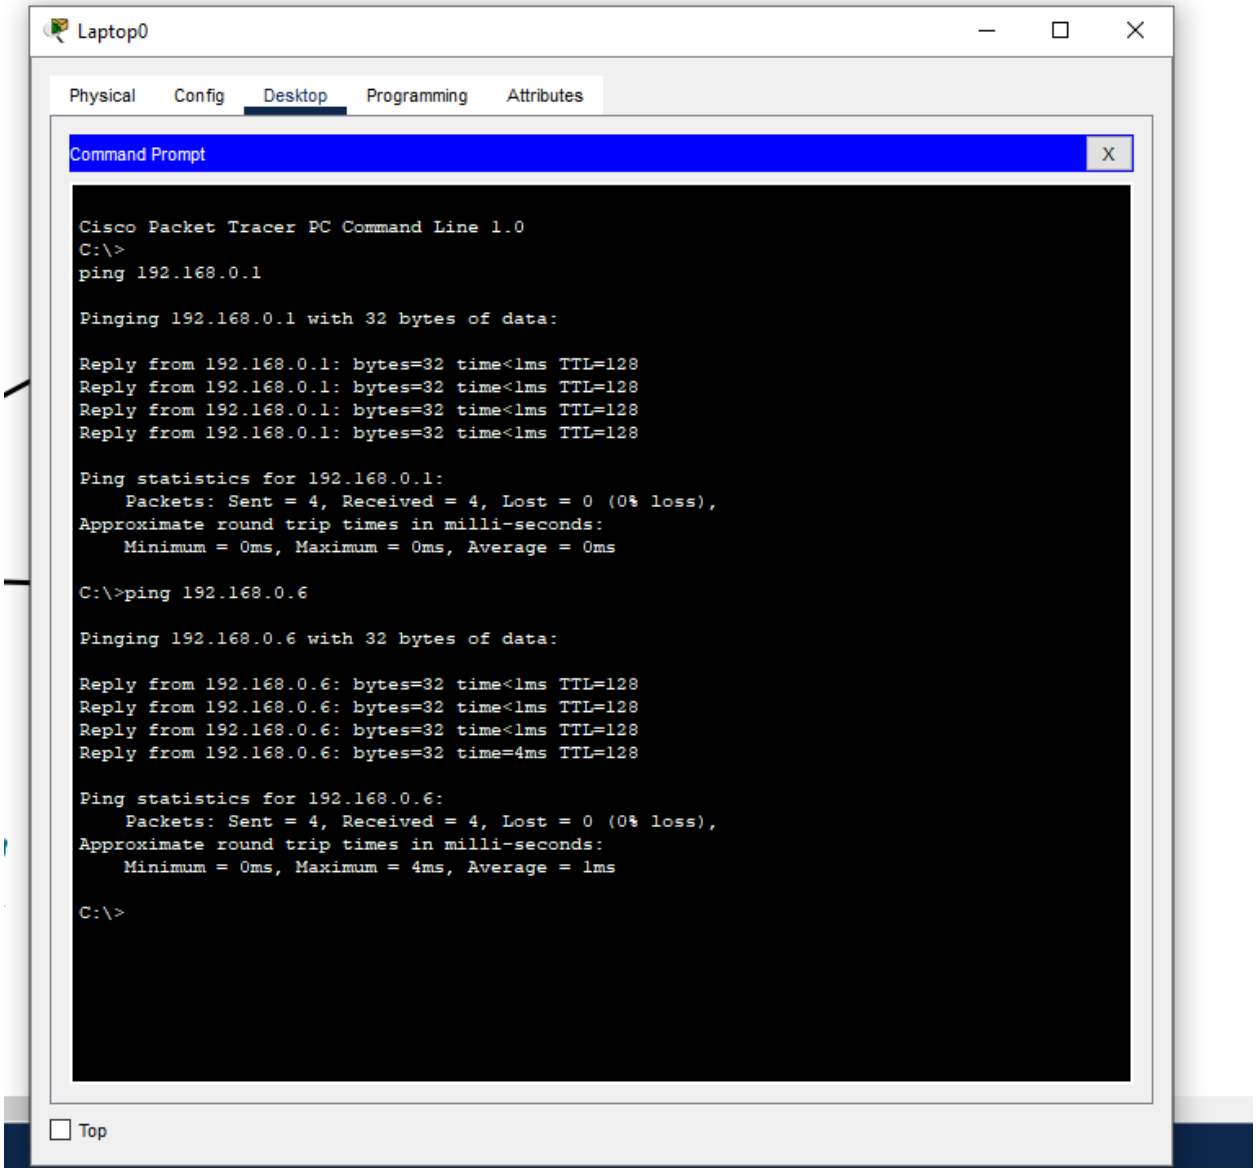
Laptop0
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>
ping 192.168.0.1
Pinging 192.168.0.1 with 32 bytes of data:
Reply from 192.168.0.1: bytes=32 time<1ms TTL=128
Reply from 192.168.0.1: bytes=32 time<1ms TTL=128
Reply from 192.168.0.1: bytes=32 time<1ms TTL=128
Reply from 192.168.0.1: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.0.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>ping 192.168.0.6
Pinging 192.168.0.6 with 32 bytes of data:
Reply from 192.168.0.6: bytes=32 time<1ms TTL=128
Reply from 192.168.0.6: bytes=32 time<1ms TTL=128
Reply from 192.168.0.6: bytes=32 time<1ms TTL=128
Reply from 192.168.0.6: bytes=32 time=4ms TTL=128
Ping statistics for 192.168.0.6:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 4ms, Average = 1ms
C:\>
Top

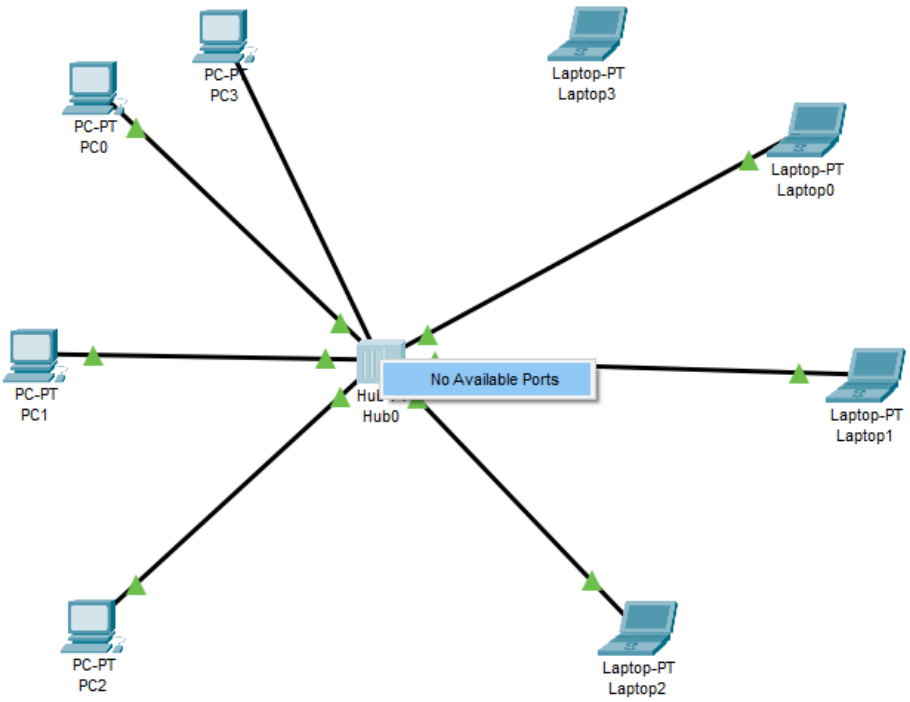
PC-PT
PC3
PC-PT
PC0
Laptop-PT
Laptop3
Laptop-PT
Laptop0
PC-PT
PC1
No Available Ports
Hub0
Laptop-PT
Laptop1
PC-PT
PC2
Laptop-PT
Laptop2

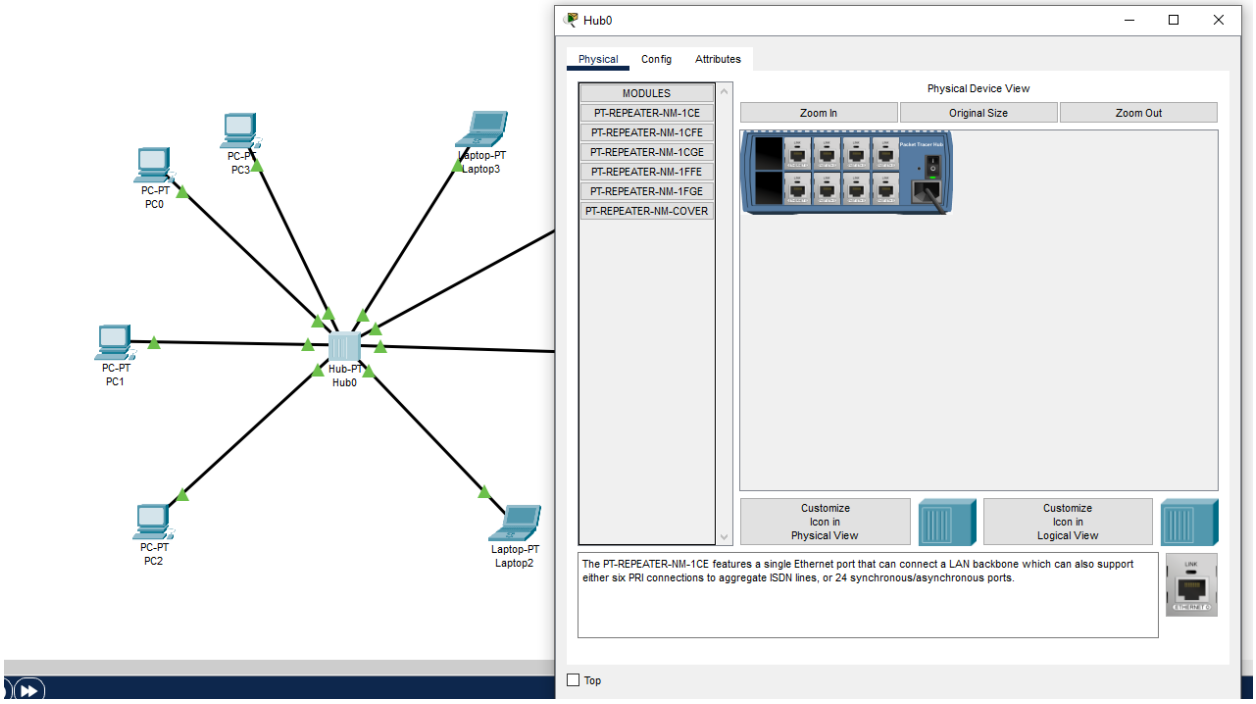
Hub0
Physical
Config
Attributes
MODULES
PT-REPEATER-NM-1CE
PT-REPEATER-NM-1CFE
PT-REPEATER-NM-1CGE
PT-REPEATER-NM-1FFE
PT-REPEATER-NM-1FGE
PT-REPEATER-NM-COVER
Physical Device View
Zoom In
Original Size
Zoom Out
Customize
Icon in
Physical View
Customize
Icon in
Logical View
The PT-REPEATER-NM-1CE features a single Ethernet port that can connect a LAN backbone which can also support either six PRI connections to aggregate ISDN lines, or 24 synchronous/asynchronous ports.
Top
PC-PT
PC0
PC-PT
PC3
Laptop-PT
Laptop3
PC-PT
PC1
Hub-PT
Hub0
PC-PT
PC2
Laptop-PT
Laptop2

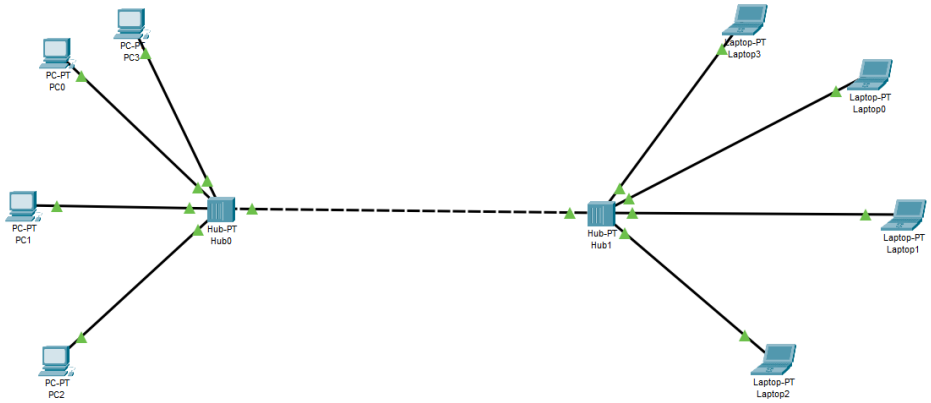
PC-PT
PC0
PC-PT
PC3
PC-PT
PC1
Hub-PT
Hub0
PC-PT
PC2
Laptop-PT
Laptop3
Laptop-PT
Laptop0
Hub-PT
Hub1
Laptop-PT
Laptop1
Laptop-PT
Laptop2

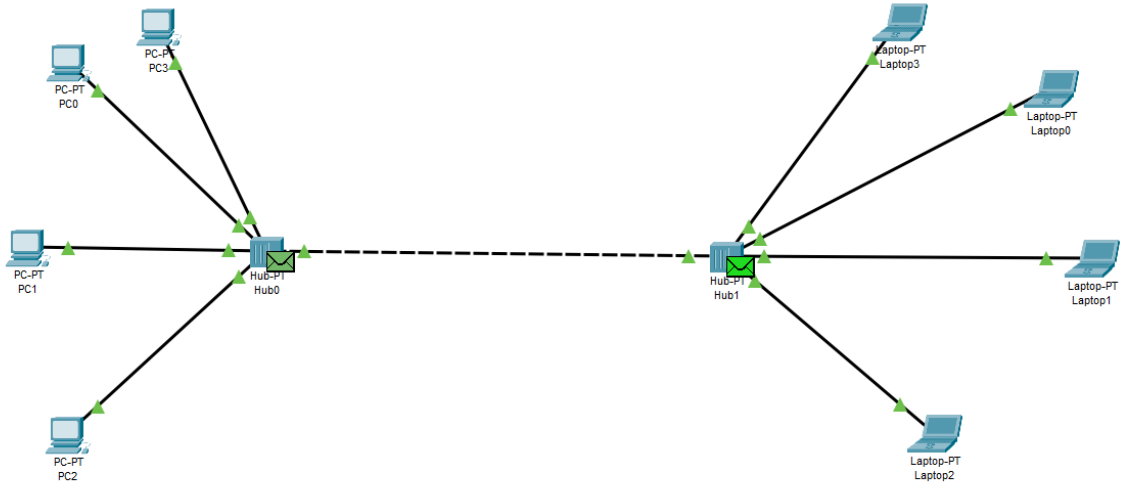
PC-PT
PC0
PC-PT
PC3
PC-PT
PC1
Hub-PT
Hub0
PC-PT
PC2
Laptop-PT
Laptop3
Laptop-PT
Laptop0
Hub-PT
Hub1
Laptop-PT
Laptop1
Laptop-PT
Laptop2