
Cisco практика 1. Коваленко Кирилл ИС221

1 ПК

GLOBAL	FastEthernet0
Settings Algorithm Settings INTERFACE FastEthernet0 Bluetooth Port Status Bandwidth Duplex MAC Address IP Configuratio DHCP Static IPv4 Address Subnet Mask IPv6 Configura Automatic Static IPv6 Address	□ 100 Mbps □ 10 Mbps □ Au □ Half Duplex □ Full Duplex ☑ Au □ 0060.5CDD.EC08 192.168.0.1 □ 255.255.255.0 n ss: FE80::260:5CFF:FEDD:EC08

2 ПК



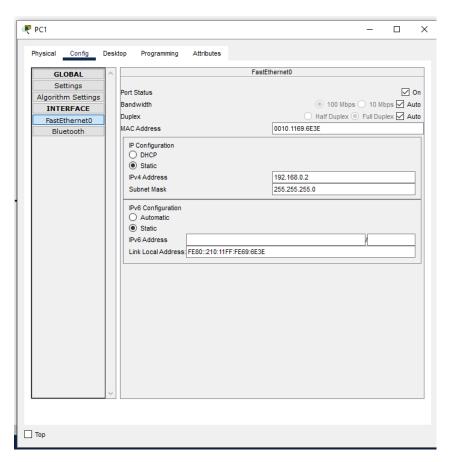

Pinguem

```
Physical Config Desidop Programming Attributes

Command Prompt

Cisco Facket Tracer PC Command Line 1.0
C:\Pinging 192.168.0.1 with 32 bytes of data:

Reply from 192.168.0.1: bytes=32 time<a href="mailto:lime">lime</a> ITL=128
Reply from 192.168.0.1: bytes=32 time<a href="mailto:lime">lime<a href="mailto:lime">lime<a
```

Симуляция

