


Cisco №10

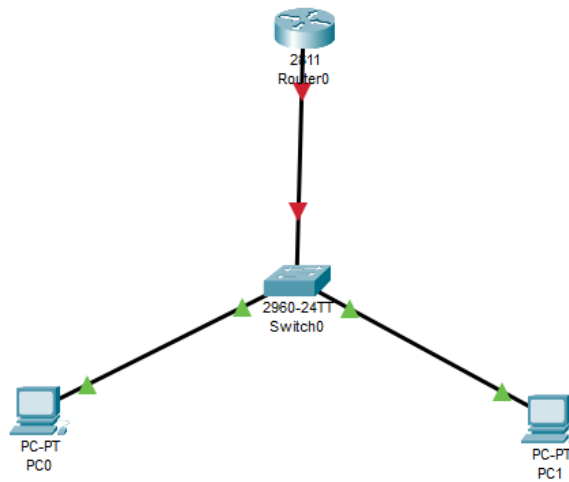

Router0

Physical Config CLI Attributes

GLOBAL

- Settings
- Algorithm Settings

ROUTING

- Static
- RIP

SWITCHING

- VLAN Database

INTERFACE

- FastEthernet0/0
- FastEthernet0/1

FastEthernet0/0

Port Status ☒ On

Bandwidth ☐ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☐ Full Duplex ☒ Auto

MAC Address 00D0.5822.6A01

IP Configuration

IPv4 Address 192.168.0.1

Subnet Mask 255.255.255.0

Tx Ring Limit 10


Equivalent IOS Commands

```
Router>enable
Router#
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface FastEthernet0/0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
ip address 192.168.0.4 255.255.255.0
Router(config-if)#ip address 192.168.0.1 255.255.255.0
Router(config-if)#
```

☐ Top

Настроили роутер

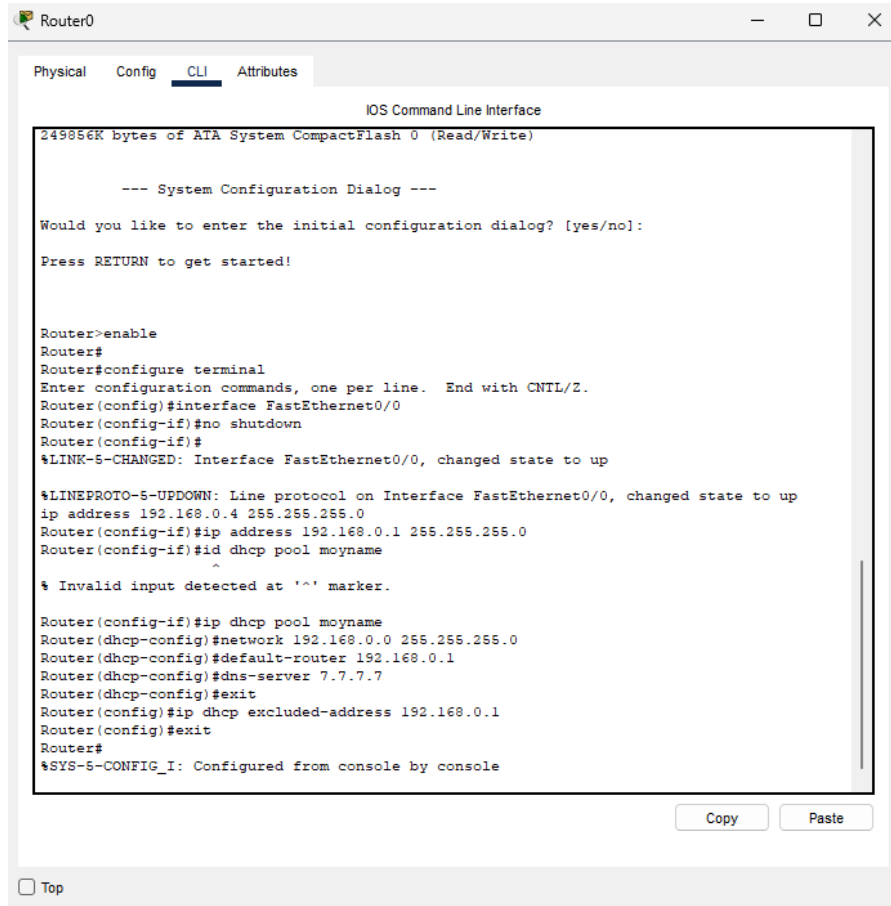

Проверка dhcp

