


NET622.FA3.WEEK10.ONNEILE

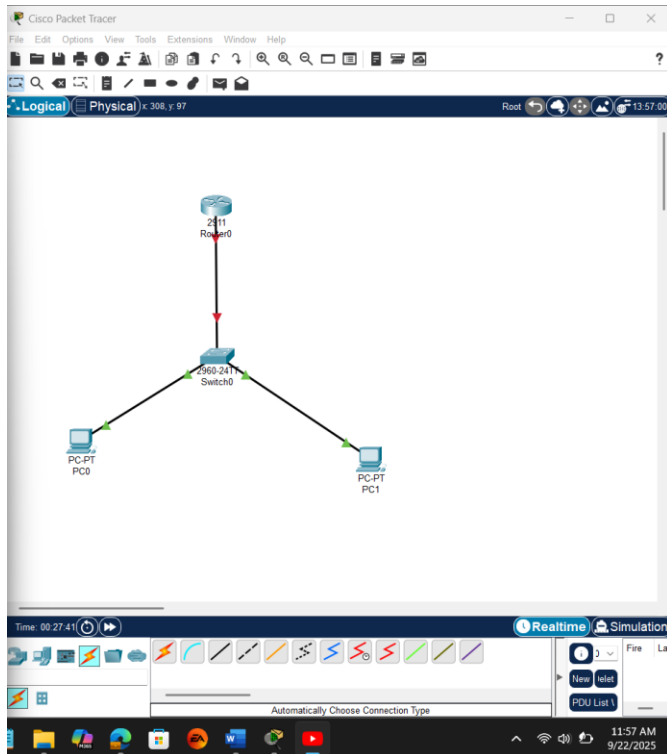

```
Router0
Physical Config CLI Attributes
IOS Command Line Interface

use. Delivery of Cisco cryptographic products does not imply
third-party authority to import, export, distribute or use encryption.
Importers, exporters, distributors and users are responsible for
compliance with U.S. and local country laws. By using this product you
agree to comply with applicable laws and regulations. If you are unable
to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wml/export/crypto/tool/stqrg.html

If you require further assistance please contact us by sending email to
export@cisco.com.

Cisco CISC02911/K9 (revision 1.0) with 491520K/32768K bytes of memory.
Processor board ID FTX152400KS
3 Gigabit Ethernet interfaces
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: no


Press RETURN to get started!

Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface gigabitEthernet 0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

Copy Paste

Top
```

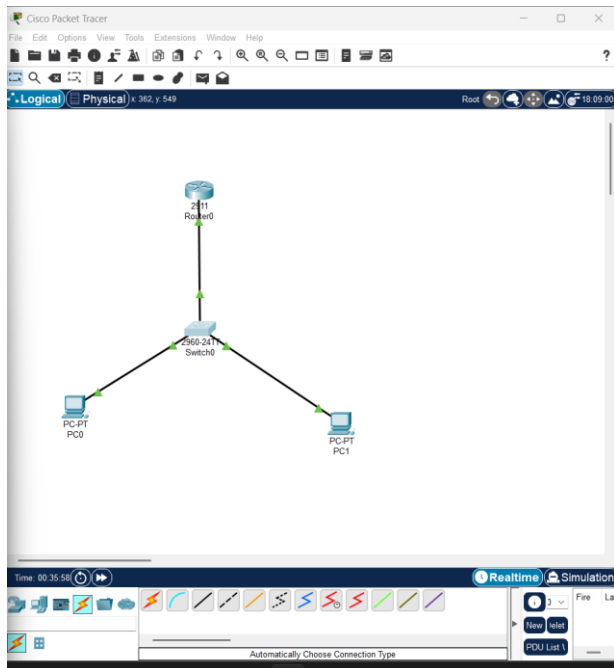

PC0

Physical Config Desktop Programming Attributes

IP Configuration

Interface: FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address: 192.168.1.2

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.1.1

DNS Server: 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address: /

Link Local Address: FE80::20A:F3FF:FE61:9730

Default Gateway:

DNS Server:

802.1X



☐ Use 802.1X Security

Authentication: MD5

Username:

Password:

Top

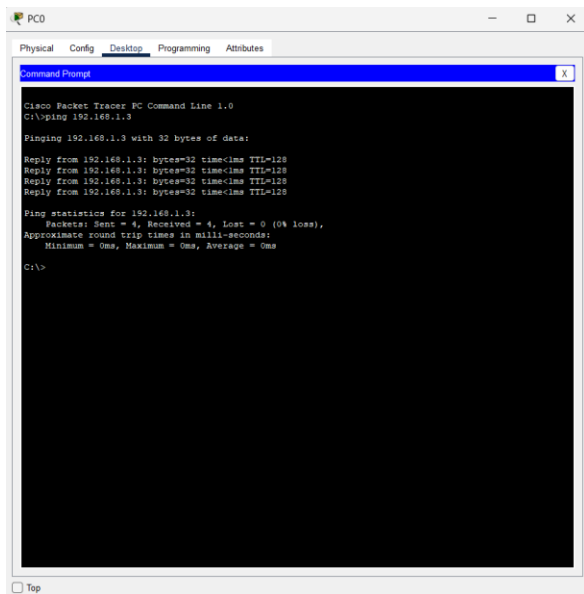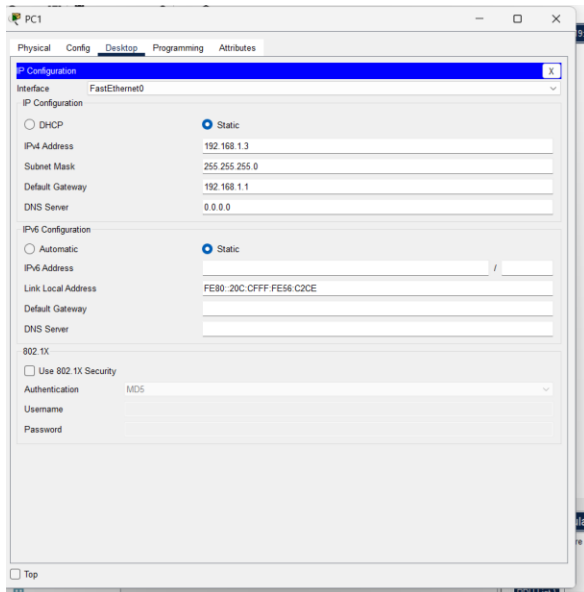

Configuring firewall

PC0

Physical Config **Desktop** Programming Attributes

Firewall X

Service ☐ On ☒ Off

Interface FastEthernet0

Inbound Rules

Action Protocol

Remote IP Remote Wildcard Mask

Remote Port Local Port

Save Remove Add

	Action	Protocol	Remote IP	Remote Wild Card	Remote Port	Local Port
1	Deny	ICMP	0.0.0.0	255.255.255.255	-	-

☐ Top

PC0

Physical Config **Desktop** Programming Attributes

Firewall X

Service ☐ On ☒ Off

Interface FastEthernet0

Inbound Rules

Action Protocol

Remote IP Remote Wildcard Mask

Remote Port Local Port

Save Remove Add

	Action	Protocol	Remote IP	Remote Wild Card	Remote Port	Local Port
1	Deny	ICMP	0.0.0.0	255.255.255.255	-	-
2	Allow	IP	0.0.0.0	255.255.255.255	-	-

☐ Top

