


NET622.FA3.WEEK2. ONNEILE

NB. Please refer to the Cisco packet tracer file, as I had done the configuration weeks prior and forgot to capture some screenshots during the process.

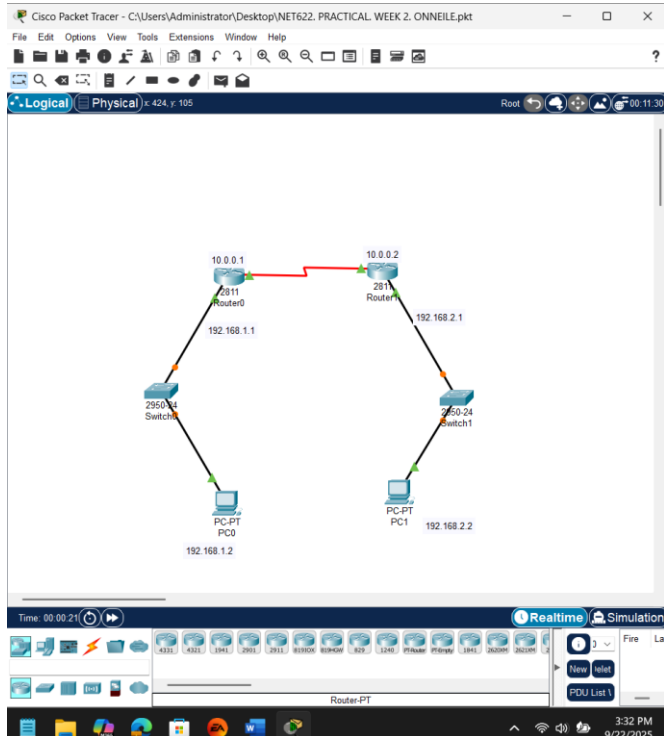

The screenshot shows the configuration window for PC0. The 'Desktop' tab is selected. Under 'IP Configuration', the 'Interface' is 'FastEthernet0'. The 'IP Configuration' section has 'Static' selected. The 'IPv4 Address' is '192.168.1.2', 'Subnet Mask' is '255.255.255.0', 'Default Gateway' is '192.168.1.1', and 'DNS Server' is '0.0.0.0'. The 'IPv6 Configuration' section has 'Static' selected. The 'IPv6 Address' is empty, 'Link Local Address' is 'FE80::20D:B0FF:FE34:D09B', 'Default Gateway' is empty, and 'DNS Server' is empty. The '802.1X' section has 'Use 802.1X Security' unchecked, 'Authentication' set to 'MD5', 'Username' is empty, and 'Password' is empty. A 'Top' button is at the bottom left.

PC1

Physical Config Desktop Programming Attributes

Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.2.2

Subnet Mask 255.255.255.0

Default Gateway 192.168.2.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::240:BFF:FE39:81E6

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MOS

Username

Password

Top

Router0

Physical Config CLI Attributes

IOS Command Line Interface

San Jose, California 95134-1706

Cisco IOS Software, 2800 Software (C2800NM-ADVIPSERVICESK9-M), Version 15.1(4)M4

Technical Support: <http://www.cisco.com/techsupport>

Copyright (c) 1986-2012 by Cisco Systems, Inc.

Compiled Thu 5-Jan-12 15:41 by pt_team

Image text-base: 0x2100F918, data-base: 0x24729040

This product contains cryptographic features and is subject to United States and local country laws governing import, export, transfer and use. Delivery of Cisco cryptographic products does not imply third-party authority to import, export, distribute or use encryption. Importers, exporters, distributors and users are responsible for compliance with U.S. and local country laws. By using this product you agree to comply with applicable laws and regulations. If you are unable to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at: <http://www.cisco.com/wai/export/crypto/tool/stqrg.html>

If you require further assistance please contact us by sending email to export@cisco.com.

cisco 2811 (MPC840) processor (revision 0x200) with 40414K/5120K bytes of memory
Processor board ID JAD05190HT2 (429291495)
2 FastEthernet interface(s)
1 Low-speed serial(sync/asyn) network interface(s)
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249854K bytes of ATA System CompactFlash 0 (Read/Write)

Press RETURN to get started!

%LINK-5-CHANGED: Interface Serial0/2/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/2/0, changed state to up

%DUAL-5-NSRCHANGE: IP-IGRP 1: Neighbor 10.0.0.2 (Serial0/2/0) is up: new adjacency

Copy Paste

Top

Router1

Physical Config CLI Attributes

IOS Command Line Interface

cisco Systems, Inc.
170 West Tasman Drive
San Jose, California 95134-1706

Cisco IOS Software, 2800 Software (C2800NM-ADVIPSERVICESK9-M), Version 15.1(4)M4

Technical Support: <http://www.cisco.com/techsupport>

Copyright (c) 1986-2012 by Cisco Systems, Inc.

Compiled Thu 5-Jan-12 15:41 by pt_team

Image text-base: 0x2100F918, data-base: 0x24729040

This product contains cryptographic features and is subject to United States and local country laws governing import, export, transfer and use. Delivery of Cisco cryptographic products does not imply third-party authority to import, export, distribute or use encryption. Importers, exporters, distributors and users are responsible for compliance with U.S. and local country laws. By using this product you agree to comply with applicable laws and regulations. If you are unable to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at: <http://www.cisco.com/wai/export/crypto/tool/stqrg.html>

If you require further assistance please contact us by sending email to export@cisco.com.

cisco 2811 (MPC840) processor (revision 0x200) with 40414K/5120K bytes of memory
Processor board ID JAD05190HT2 (429291495)
2 FastEthernet interface(s)
1 Low-speed serial(sync/asyn) network interface(s)
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249854K bytes of ATA System CompactFlash 0 (Read/Write)

Press RETURN to get started!

%LINK-5-CHANGED: Interface Serial0/2/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/2/0, changed state to up

Copy Paste

Top

Router0

Physical Config CLI Attributes

GLOBAL Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

Serial0/2/0

FastEthernet0/0

Port Status

Bandwidth

Duplex

MAC Address

0011 649D B701

IP Configuration

IPv4 Address

192.168.1.1

Subnet Mask

255.255.255.0

Tx Ring Limit

10

Equivalent IOS Commands

```
Router>
Router>enable
Router#
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface FastEthernet0/1
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#
```

Top

Router1

Physical Config CLI Attributes

GLOBAL Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

Serial0/2/0

FastEthernet0/0

Port Status

Bandwidth

Duplex

MAC Address

0003 E449 5C01

IP Configuration

IPv4 Address

192.168.2.1

Subnet Mask

255.255.255.0

Tx Ring Limit

10

Equivalent IOS Commands

```
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface FastEthernet0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#
```

Top

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
C:\>C:\Packet Tracer>PC Command Line 1.0
C:\>ipconfig 192.168.2.2

Pinging 192.168.2.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.2.2: bytes=32 time=1ms TTL=126
Reply from 192.168.2.2: bytes=32 time=1ms TTL=126
Reply from 192.168.2.2: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.2.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 7ms

C:\>ipconfig 192.168.2.2

Pinging 192.168.2.2 with 32 bytes of data:

Reply from 192.168.2.2: bytes=32 time=1ms TTL=126
Reply from 192.168.2.2: bytes=32 time=1ms TTL=126
Reply from 192.168.2.2: bytes=32 time=1ms TTL=126
Reply from 192.168.2.2: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.2.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 2ms

C:\>
```

Top

```
PC1
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time=1ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Loss = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\>
```

