





Specifications

备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色
Housing: PA6T+30%G. F UL94V-0, Color: Black
四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 3 AMP
Raring Current: 3 AMP.
接触阻抗: 20 MΩ MAX.
Contact Resistance: 20 MΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance:1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40℃ to+105℃
Temperture Range: -40℃ to+105℃

Ordering Information

P125-11 04 A0 B S 116 A 1

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15:1.5mm	1~40P	Full Of Gold	A:PBT		A:PE Bag
17:1.7mm		A0=0.8u"	B:PA6T		B:Tape & Reel
20:2.0mm		A1=1u"	C:PA9T		C:Tube
25:2.54mm		A2=1.5u"	D:LCP		D:Tube+CAP
		A3=2u"			E:Tray
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

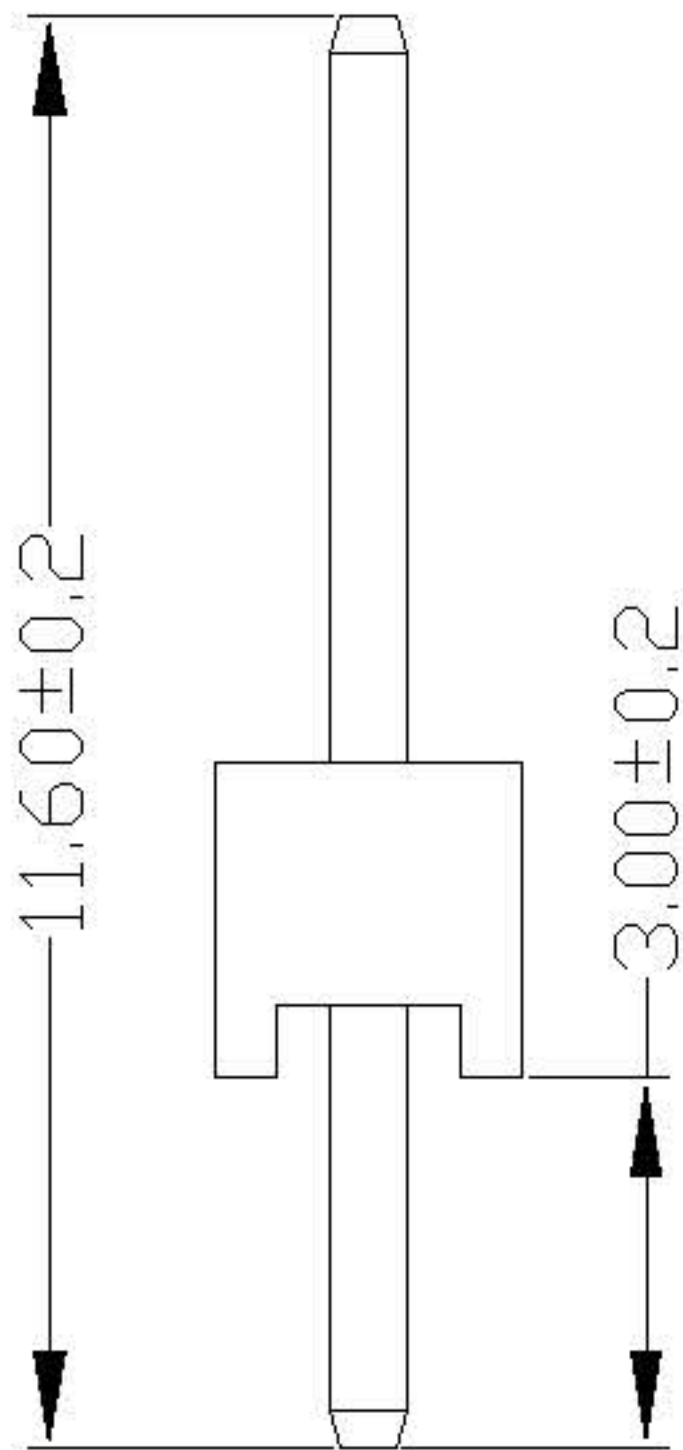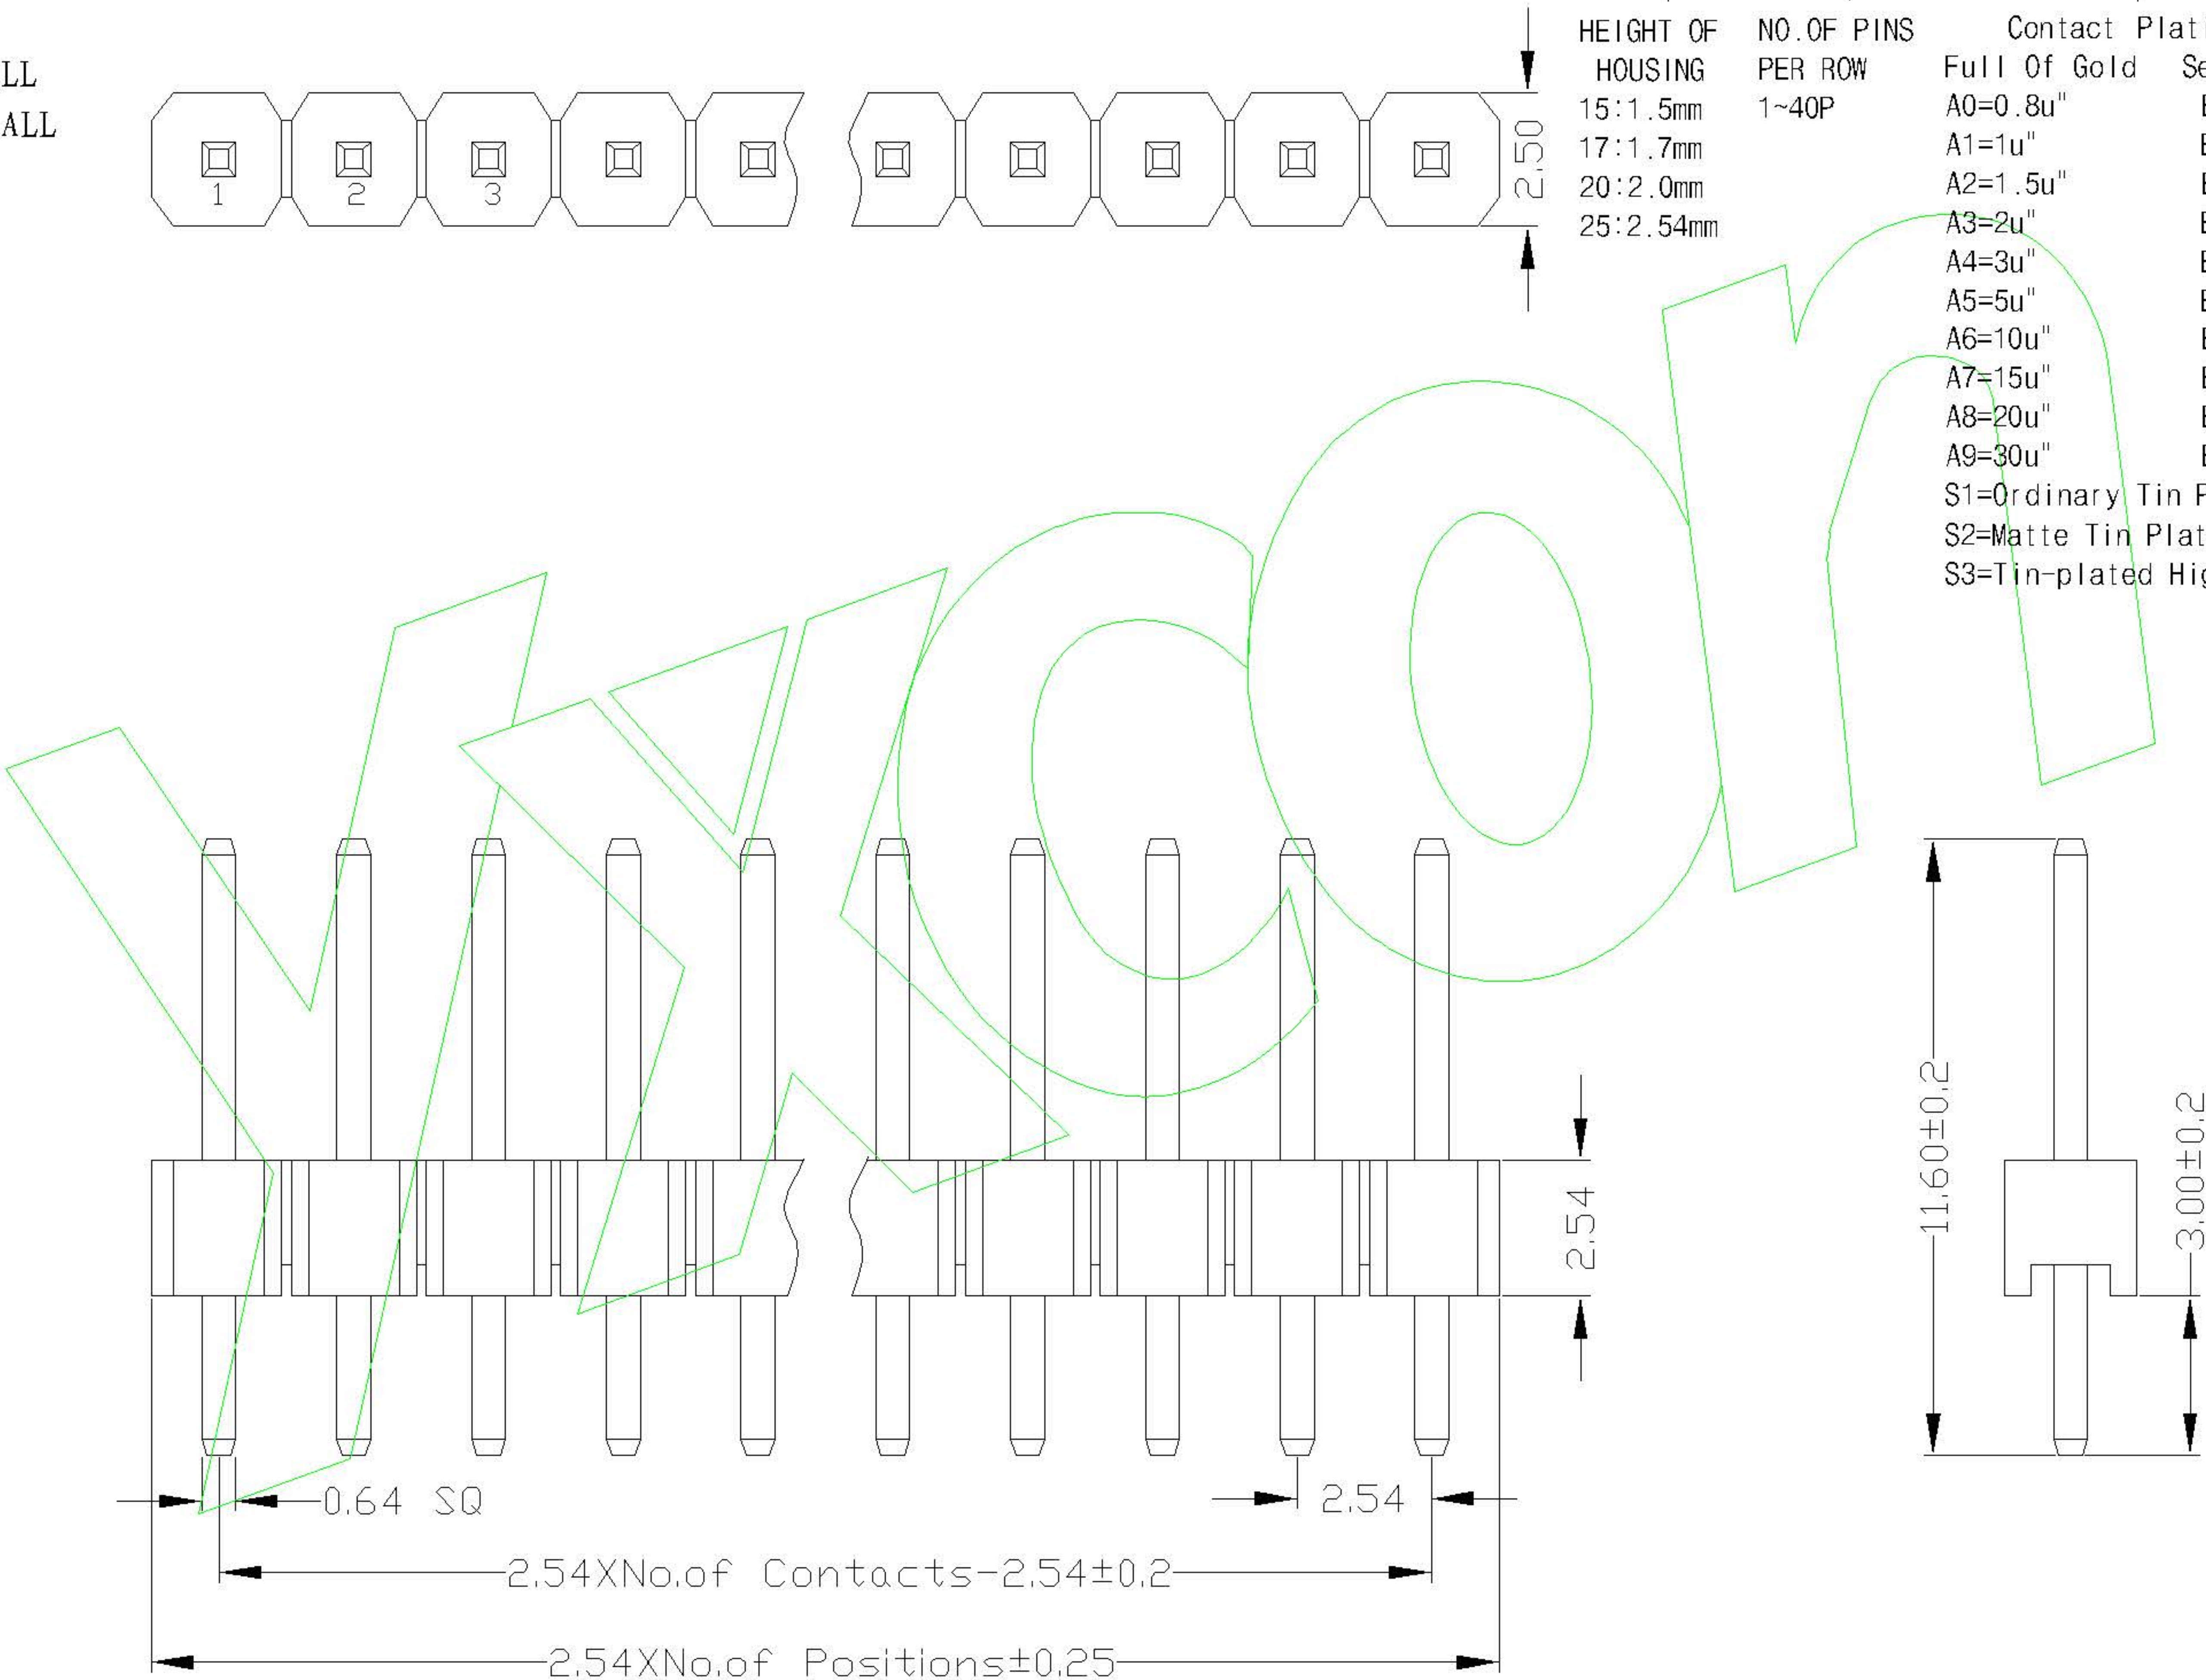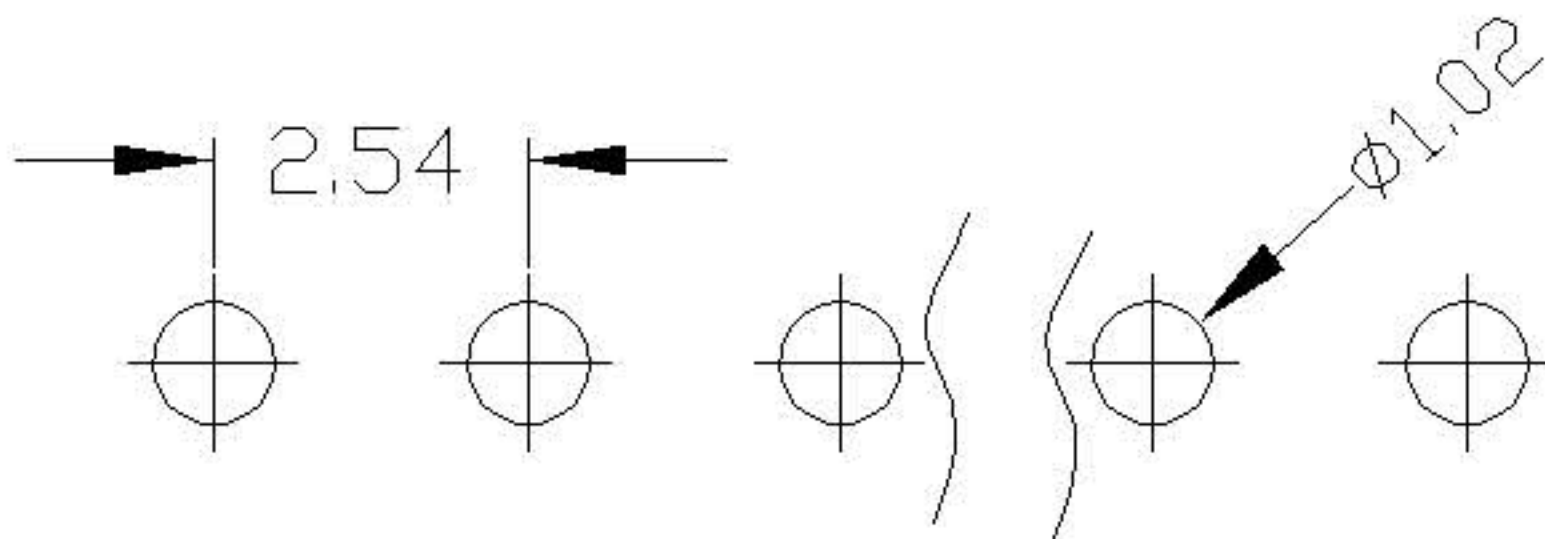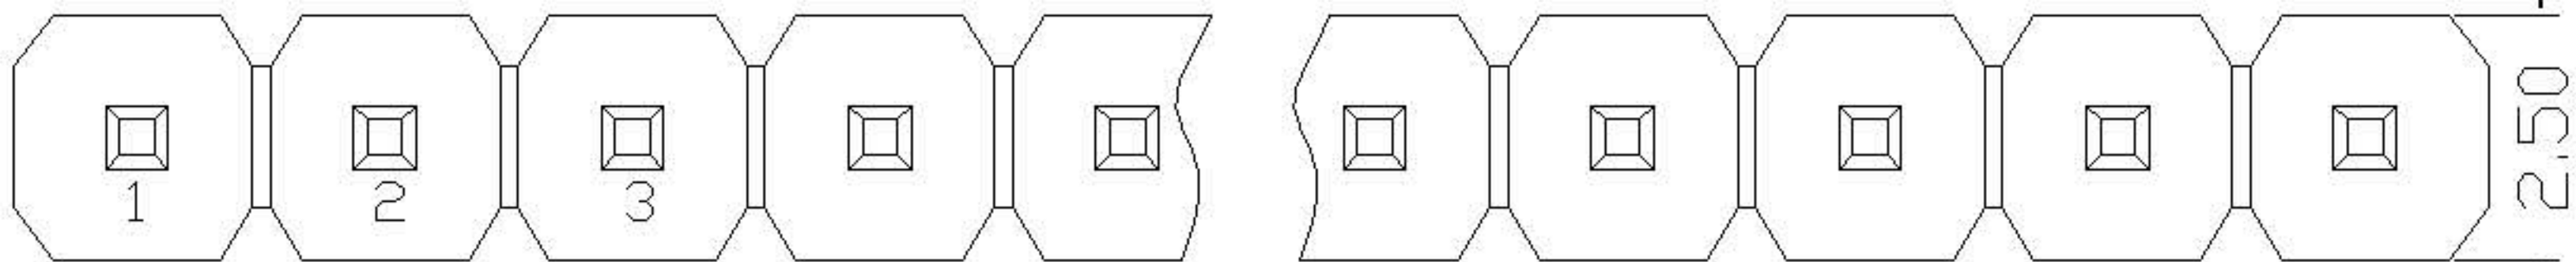

					OPERATION		SCALE		Fit	<div><div><div></div></div><div>东莞市宇熙精密连接器有限公司</div><div>Dongguan Yuxi Electronic Co.,Ltd.</div></div>			
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	庞国杰	PART NO.	P125-1104A0BS116A1	
					X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.54mm 单排针 1*4P 镀普金 PA6T 180度 L=11.6/3.0 袋装	
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	PROJ.		APPROVE		Customer No.	320020017	