

Ordering Information

RF130-X XX X X S 074 1

HEIGHT OF 1:Single-Row		NO. OF PINS 0:No Pitch A=1u"		LENGTH OF	
HOUSING	2:Double-Row	PER ROW	1:1.27	B:PA6T	TERMINAL
19:1.9mm	3:Three Rows of 1~40P	2~40P	2:2.00	C:PAGT	
30:3.0mm			3:2.54	D=10u"	D:LOP
			4:7.62	E=15u"	G:PSS
			5:10.16	F=30u"	
			6:15.24	S=Ordinary Tin Plated	
			7:22.86	H=Half gold plated Tin	

Straight socket connector height
4.2mm:solder tail, single row
Availability from:1 to 40 contacts
Standard number of contacts 5,6,
8,9,10,11,12,14,16,17,20,25,30,
32 and 40


Straight socket connector height
4.2mm:solder tail, double row
Availability from:2 to 80 contacts
Standard number of contacts 20,56,60
and 72


Straight socket connector height
4.7mm:solder tail, single row
Availability from:1to 40 contacts
Standard number of contacts 5,6,
8,9,10,11,12,14,16,17,20,25,30,
32 and 40

Straight socket connector height
4.7mm:solder tail, double row
Availability from:2 to 80 contacts
Standard number of contacts 20,56,
60 and 72

Specifications

Insulator : Black glass filled polyester PPS-GF30-FR
Flammability : UL94V-0
Sleeve : Brass CuZn 36Pb3(36000)
Contact clip (6 finger) : Beryllium copper (C17200)
Mating pin Ø : 0.40 to 0.56 mm
Forces : (polished steel gauge Ø0.43mm)
-Insertion : 2 N typ.
-Withdrawal : 1 N typ.
Mechanical life : min 500 cycles
Rated current : 3Amp
Contact resistance: Max 10mΩ
Dielectric resistance : Min 1000V RMS

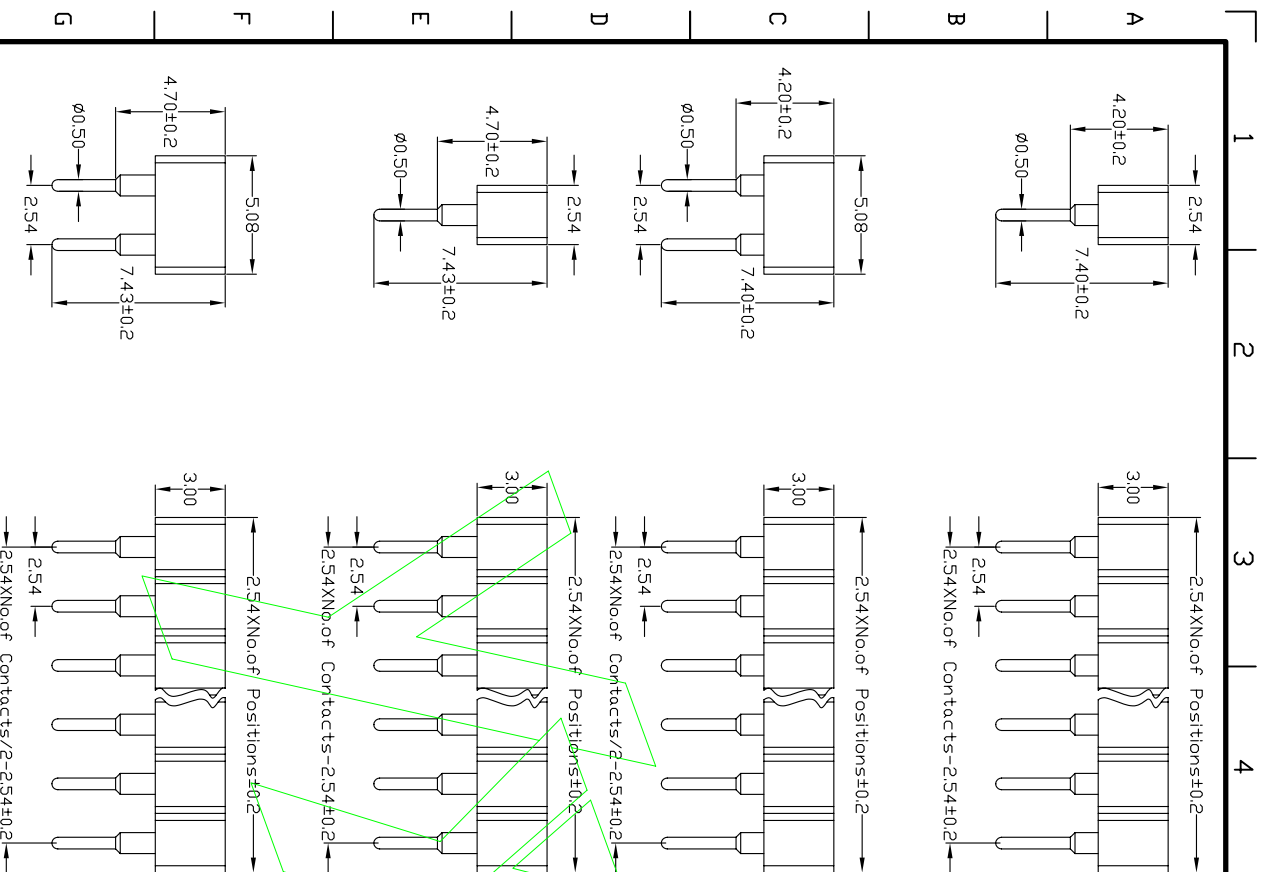

					OPERATION				<div>YXcon</div> <div>东莞市宇熙精密连接器有限公司</div> <div>Dongguan Yuxi Electronic Co.,Ltd.</div>								
					X.X	±0.25	SCALE	Fit									
					X.XX	±0.20	UNIT	MM									
					X.XXX	±0.10	SIZE	A4									
					Angle	±3°	DESIGN	卢小强									
							SHEET	1/1	CHECK		PART NO.						
							PROJ.		APPROVE		Customer No.						
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL											

Yxcon

东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co.,Ltd.