




Specifications

备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA6T+30%G. F UL94V-0
Housing: PA6T+30%G. F UL94V-0,
四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 3 AMP
Raring Current: 3 AMP.
接触阻抗: 20 MΩ MAX.
Contact Resistance: 20 MΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40℃ to+105℃
Temperture Range: -40℃ to+105℃


Ordering Information

P125-11 XX A0 B S 116 A X

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15:1.5mm 17:1.7mm 20:2.0mm 25:2.54mm	1~40P	Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u" S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	A:PBT B:PA6T C:PA9T D:LCP	A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray

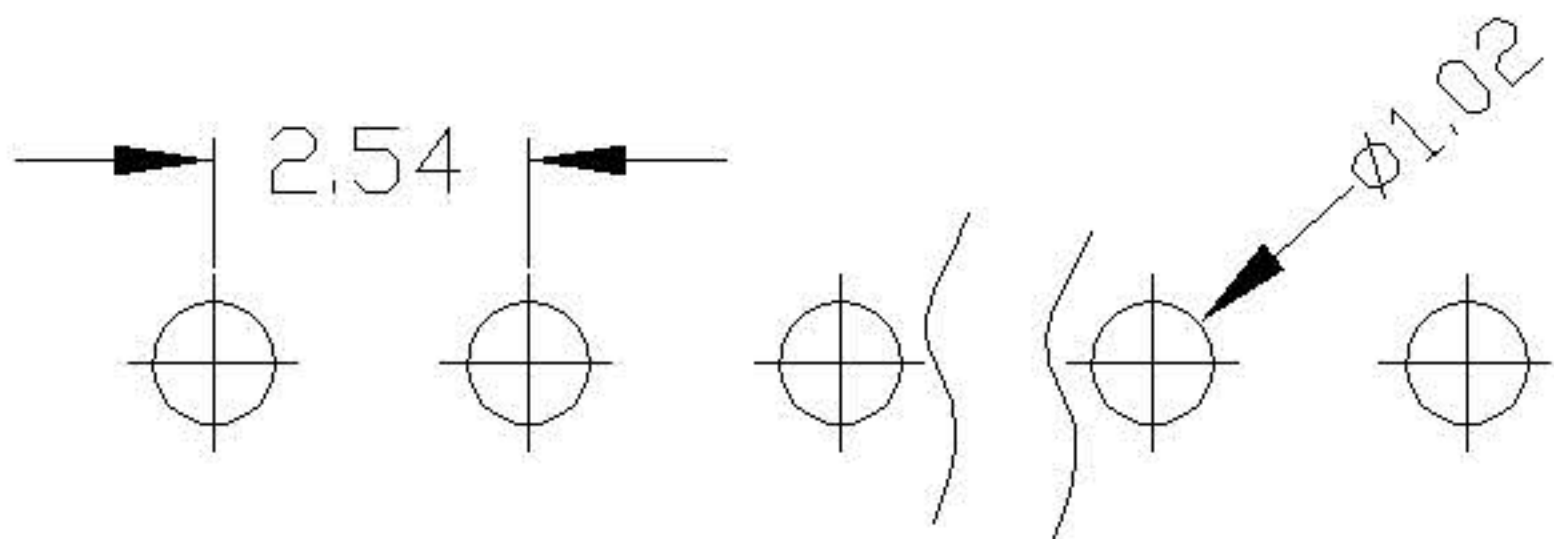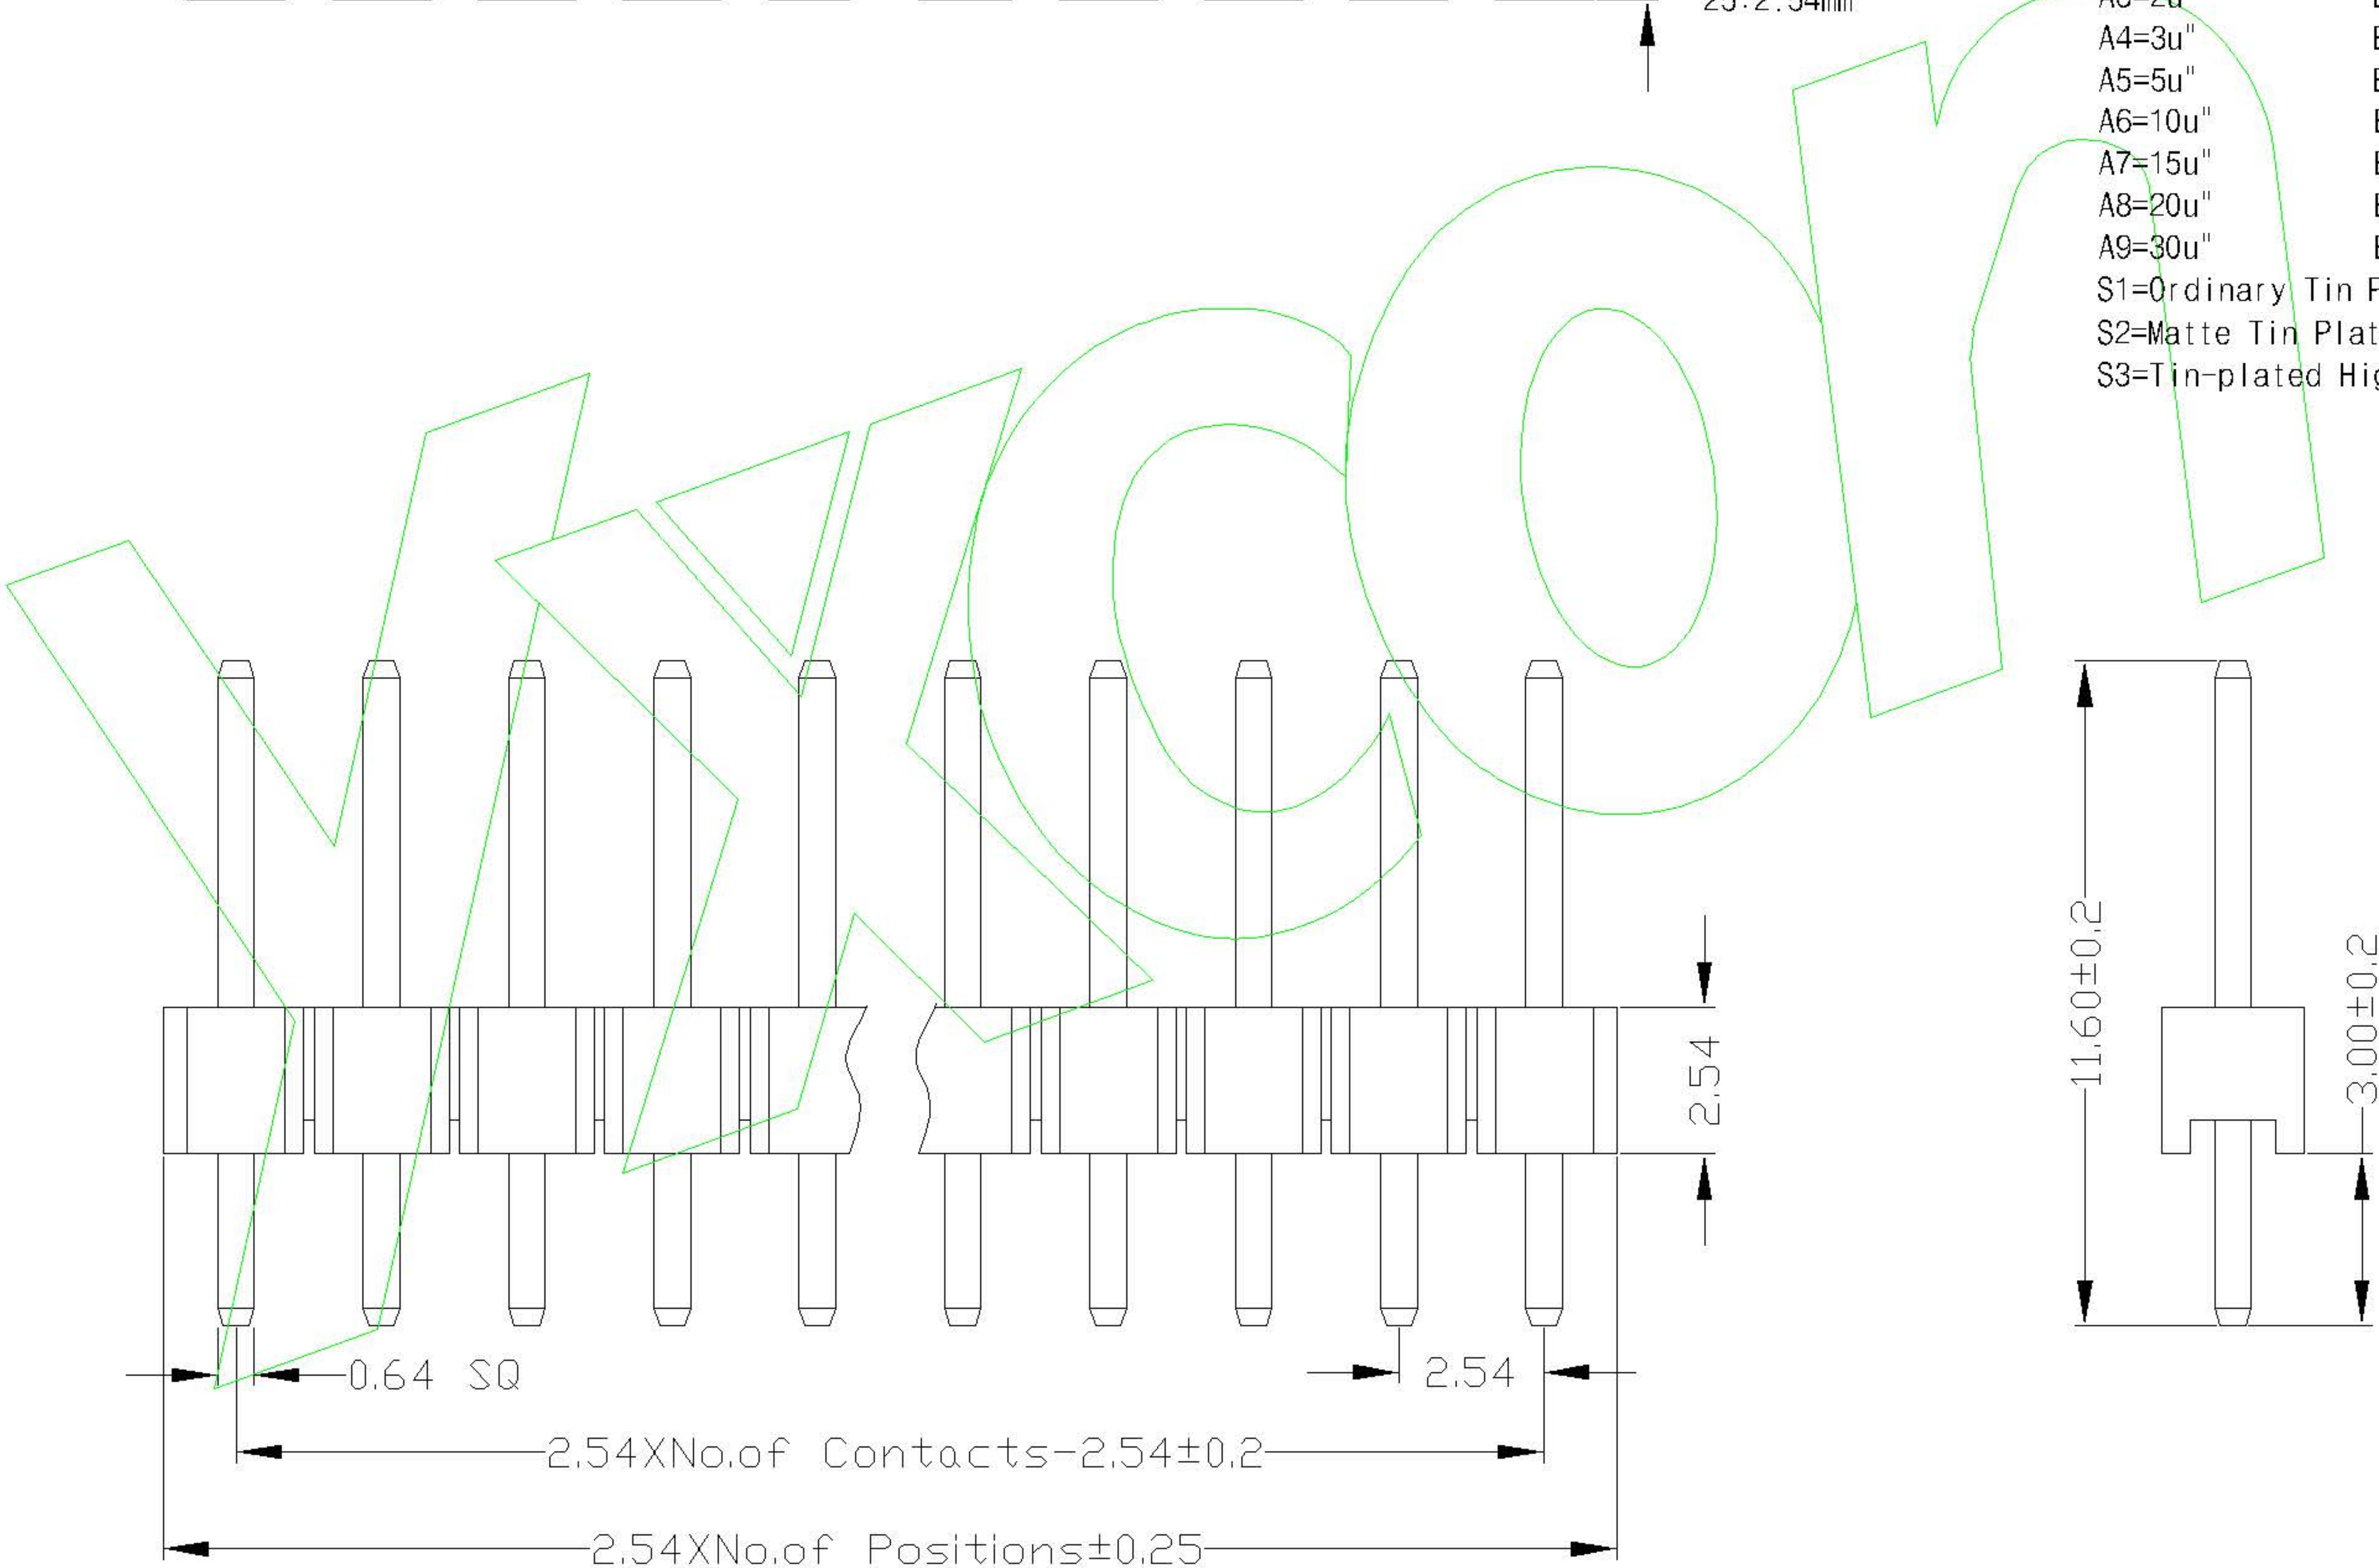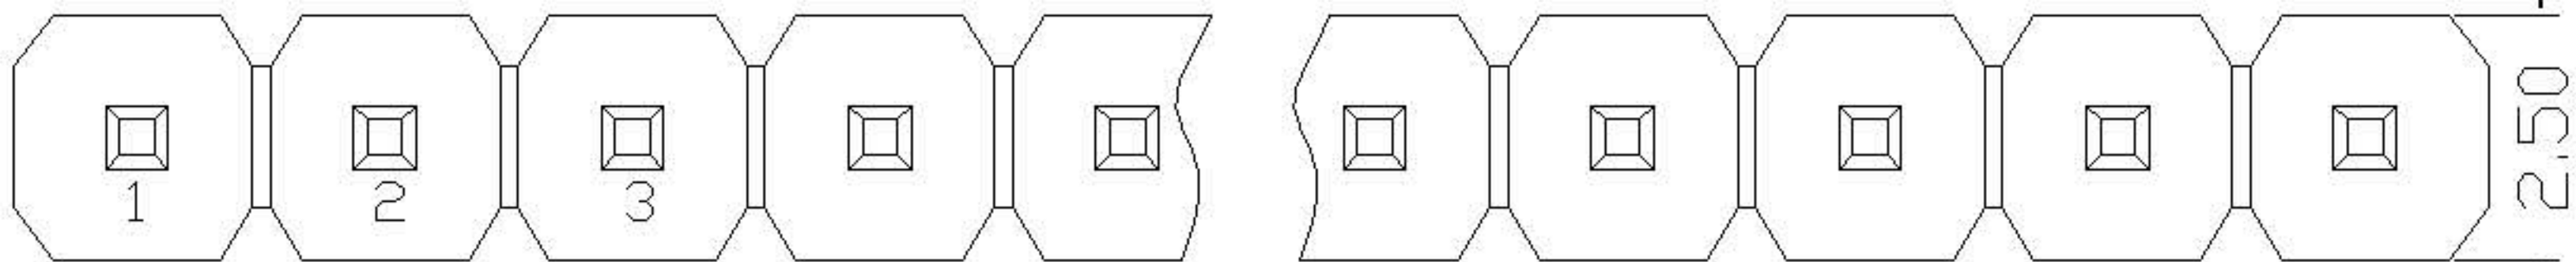

新SKU	Yxcon	Color
320020016	P125-1102A0BS116A1	Black
320020015	P125-1102A0BS116A2	Blue
320020037	P125-1102A0BS116A3	White
320020038	P125-1103A0BS116A1	White
320020005	P125-1106A0BS116A1	Blue
320020022	P125-1106A0BS116A2	White
320020004	P125-1108A0BS116A1	Blue
320020021	P125-1108A0BS116A2	White

					OPERATION		SCALE		Fit	<div><div><div></div></div><div>Yxcon</div></div> 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.			
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	庞国杰	PART NO.	P125-11XXA0BS116AX	
					X.XXX	±0.10							
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.54mm 单排针 1*XXP 镀普金 PA6T 180度 L=11.6/3.0 袋装	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE	Customer No.		