REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	New Publish		

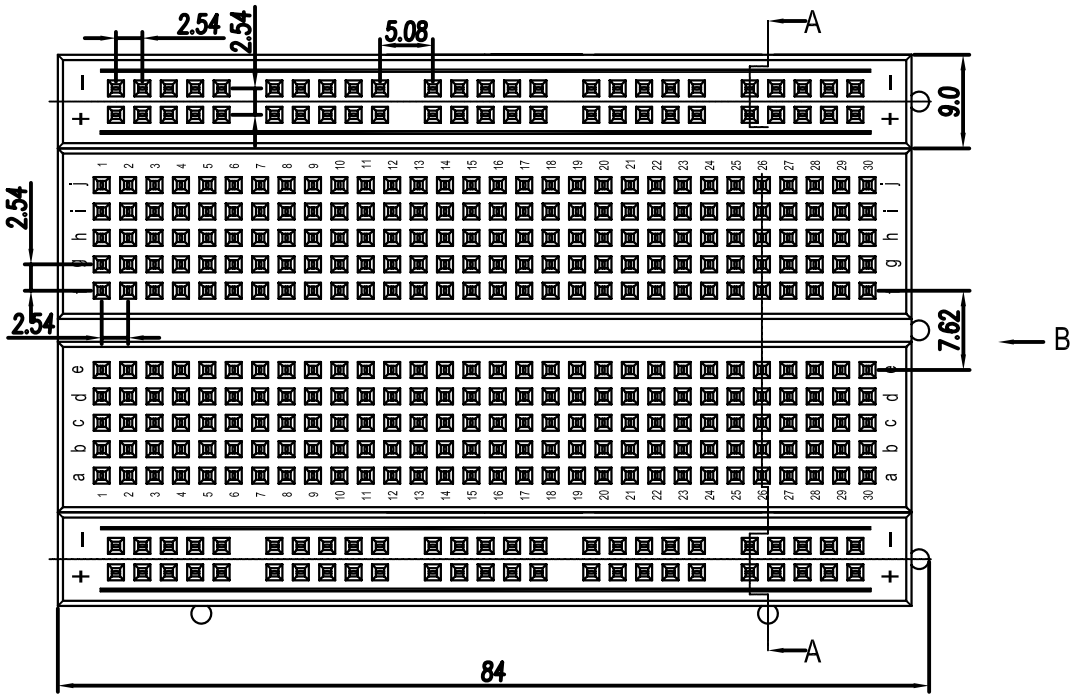



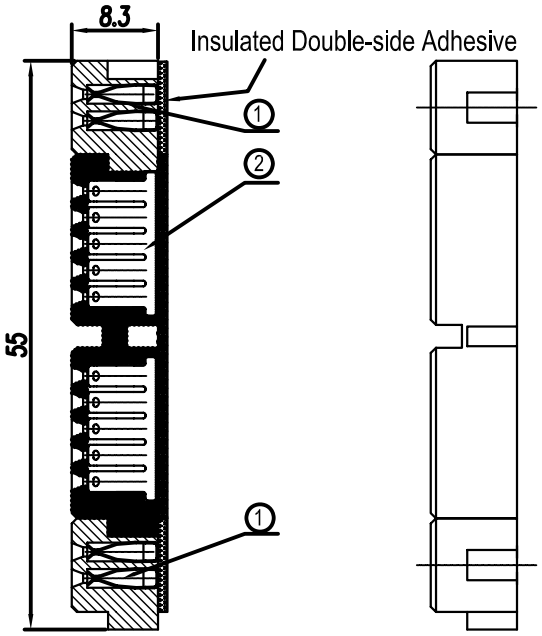

Notes:

1. Pitch: 2.54mm
2. 1 Terminal Strip: 300 Tie-point
3. 2 Distribution Strips: 100 Tie-point
4. Rated voltage/current: 300V / 3-5A
5. Insulation resistance: 500MΩ/DC500V
6. Withstanding voltage: AC1000V/1Min
7. Wire range: 29～20 AWG
8. Temp. Range: -25° c～+80° c
   Strip length: 7-8mm
9. Undimensioned Tolerances:

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer		short angle sid								
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	over 480 to	all	to 6	over 6 to	to 10	over 10 to 50	over 50 to 120	over 120 to	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

2	BB-801-2-72		702817201A		1	Terminal Strip	
1	BB-801-1-72		702717201A		2	Distribution Strips	
NO.	NAME OF PART		NO. OF PART		Q'TY	NOTES	
DES.	YYS	DATE	09/03/11"	UNITS	mm	FIRST ANGLE PROJECTION	SHEET 1 of 1
CHK.		DATE		SIZE	A4		
APP.		DATE		SCALE	1:1	DWG NO.	SP-2-7030001
CIXI WANJIE ELECTRONIC CO., LTD					TITLE	BB-801T	
						BB-801T(72 Transparent)	