


Specifications



备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.
Housing: PA6T+30%G.F UL94V-0, Color: Black
四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 3 AMP
Raring Current: 3 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40°C to+105°C
Temperture Range: -40°C to+105°C

Ordering Information

P125-11 06 A0 B R 138 A 1

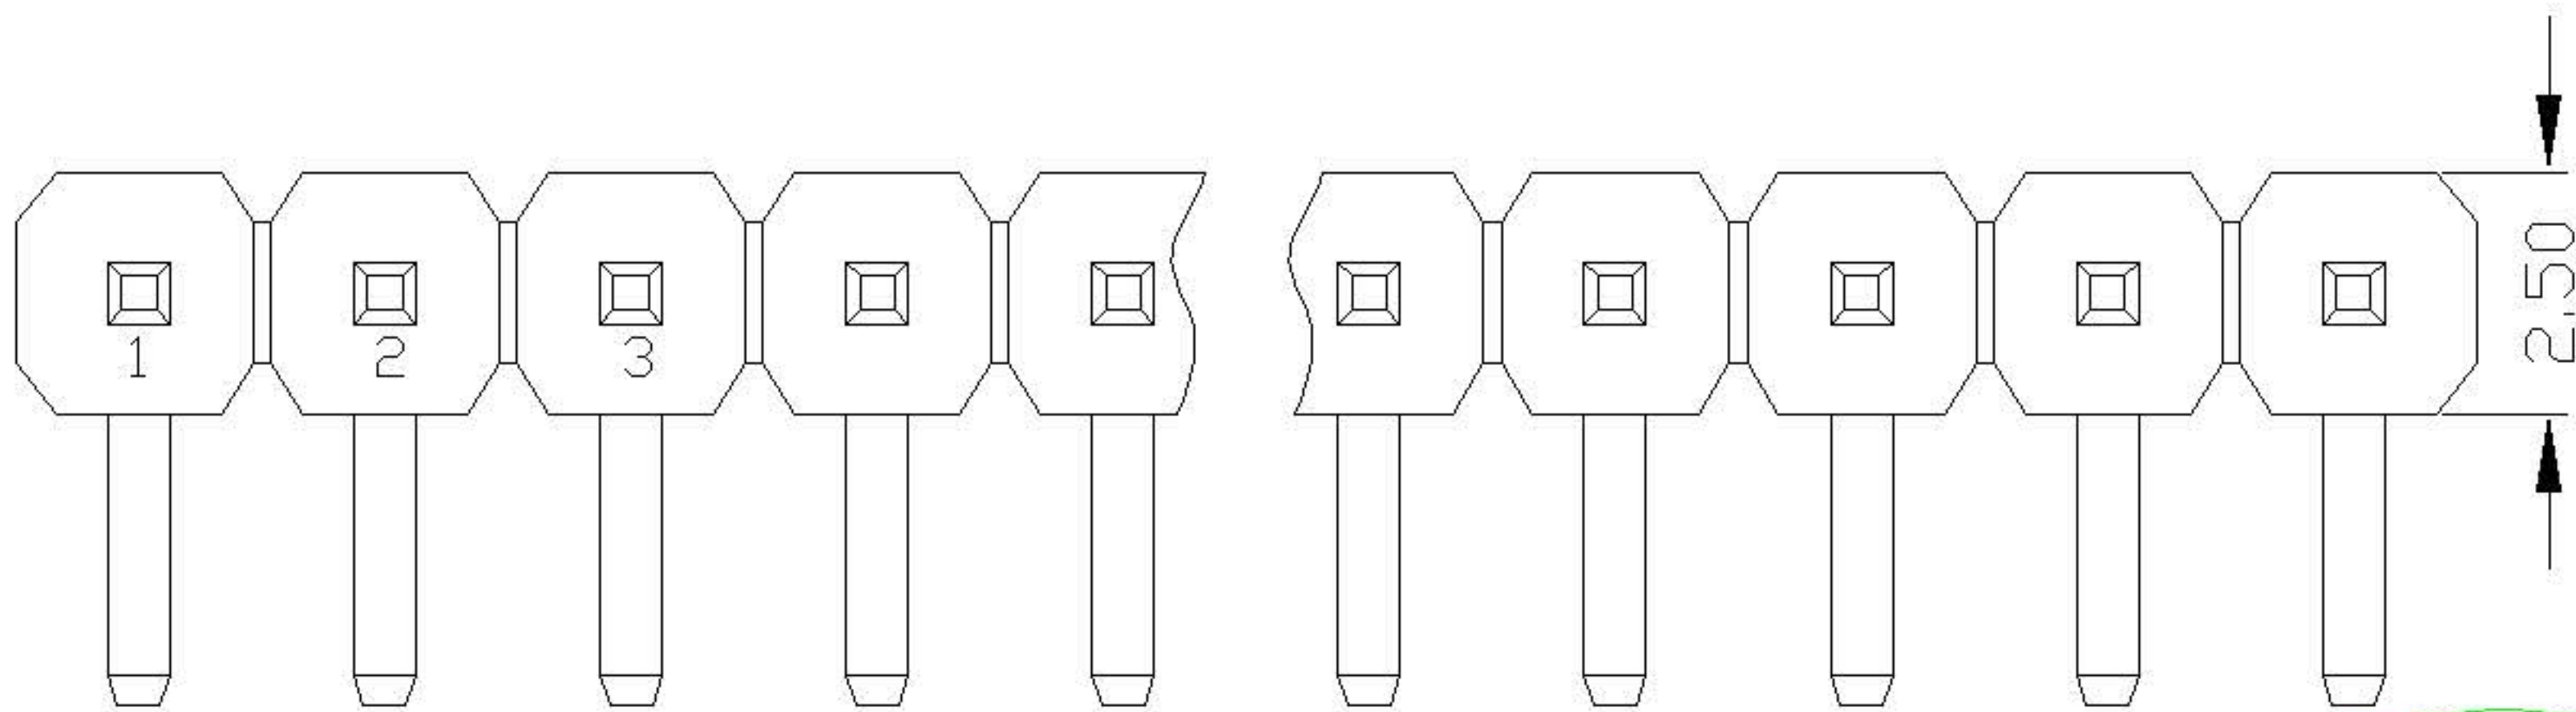

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Full Of Gold	Plating Semi-gold	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15:1.5mm	1~40P	A0=0.8u"	B0=0.8U"	A:PBT		A:PE Bag
17:1.7mm		A1=1u"	B1=1U"	B:PA6T		B:Tape & Reel
20:2.0mm		A2=1.5u"	B2=1.5U"	C:PA9T		C:Tube
25:2.54mm		A3=2u"	B3=2U"	D:LCP		D:Tube+CAP
		A4=3u"	B4=3U"			E:Tray
		A5=5u"	B5=5U"			
		A6=10u"	B6=10U"			
		A7=15u"	B7=15U"			
		A8=20u"	B8=20U"			
		A9=30u"	B9=30U"			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

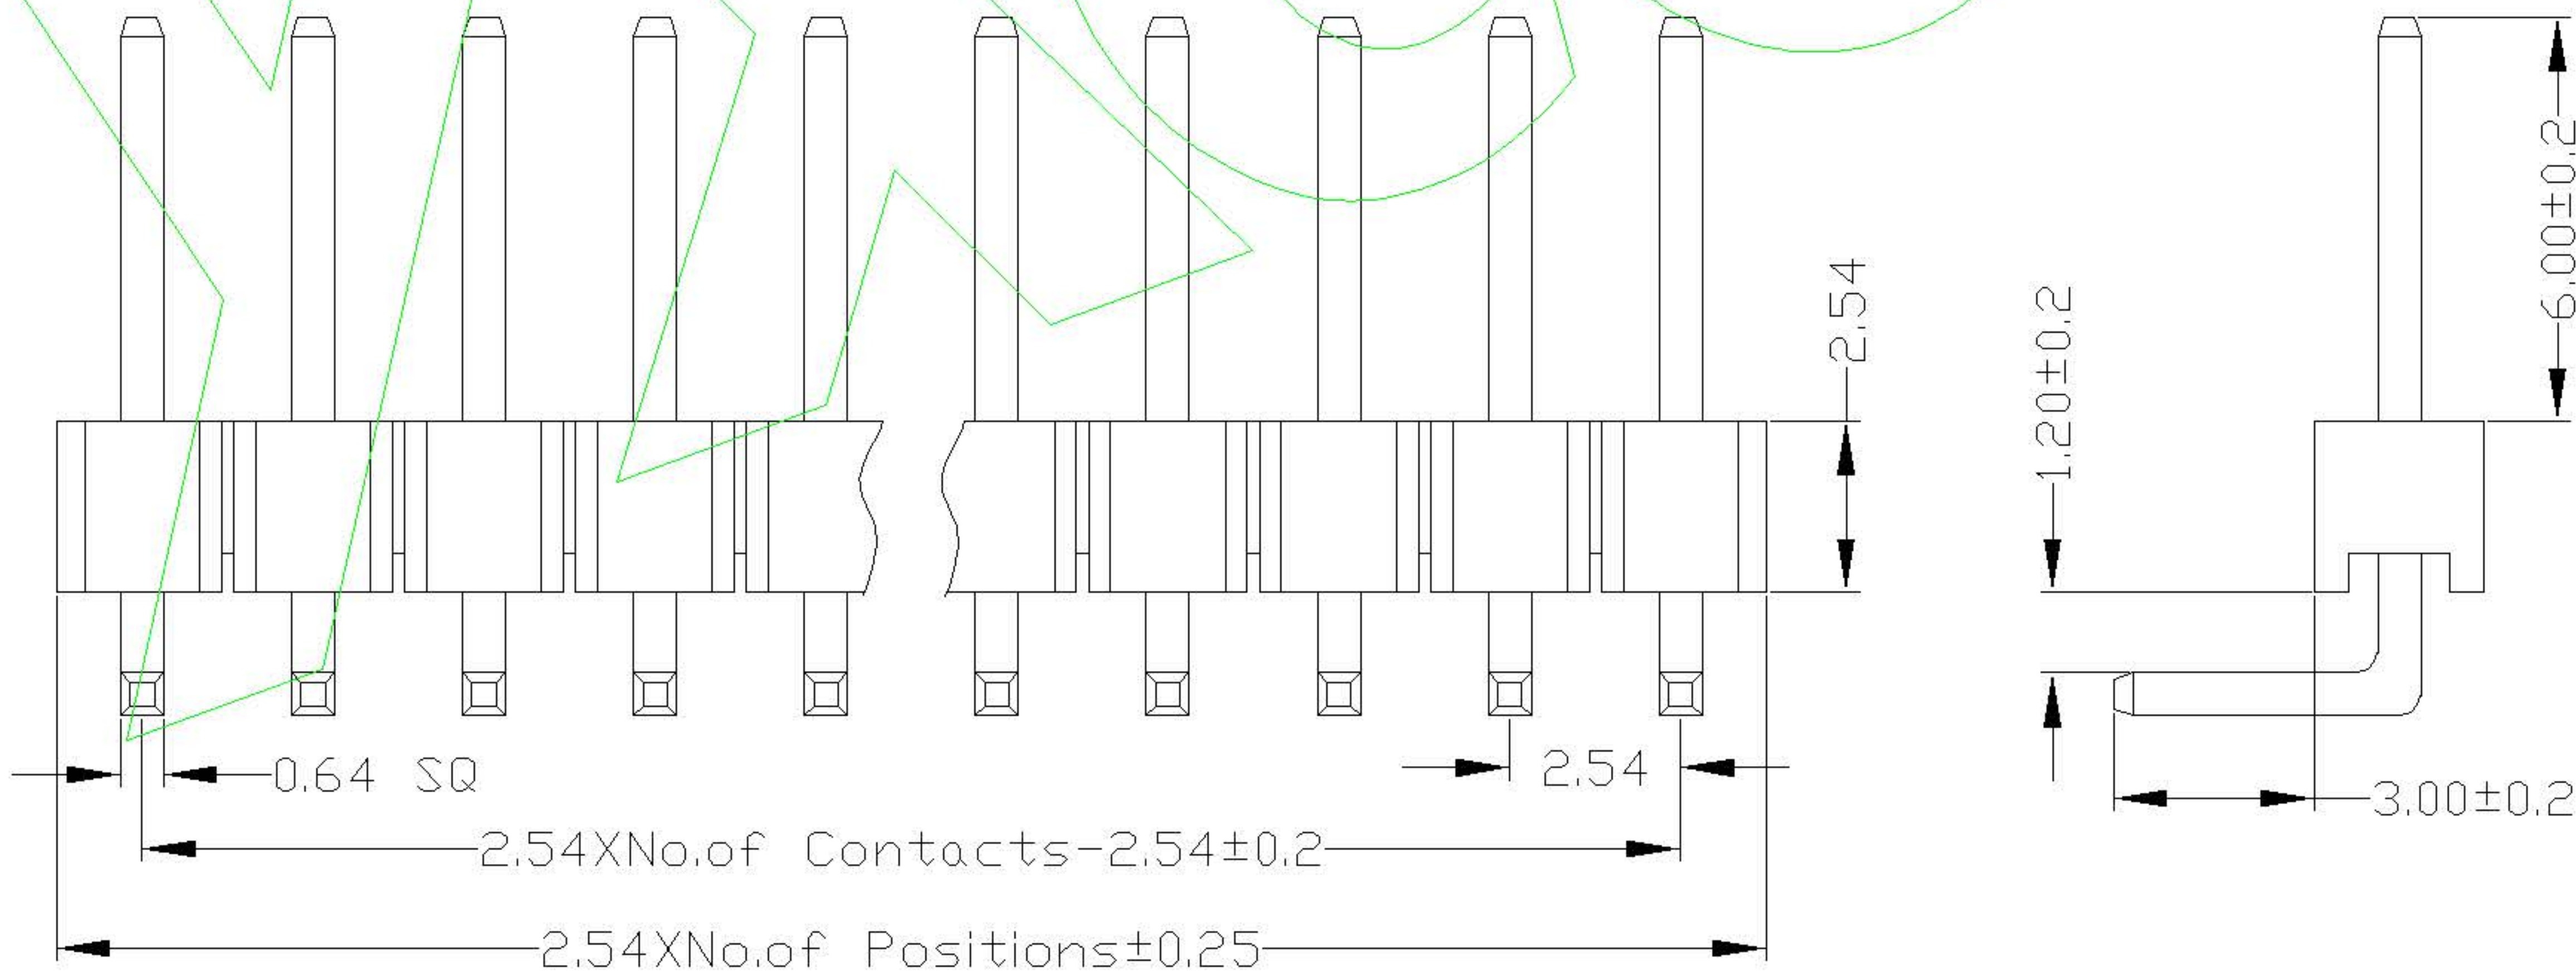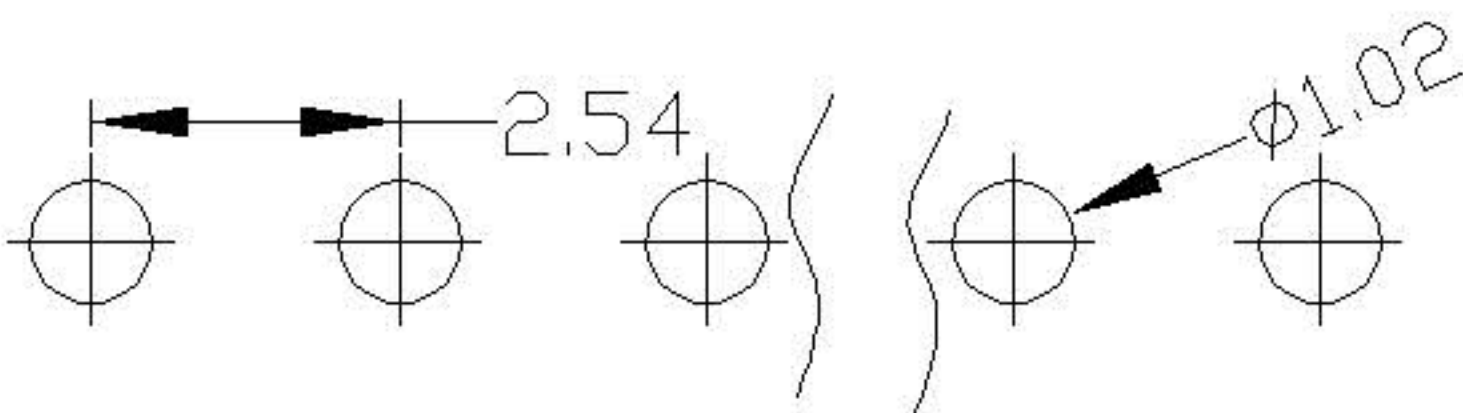

					OPERATION		SCALE		Fit	<div><div><div></div></div><div>东莞市宇熙精密连接器有限公司</div><div>Dongguan Yuxi Electronic Co.,Ltd.</div></div>			
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	庞国杰		PART NO.	P125-1106A0BR138A1
					X.XXX	±0.10	SHEET	1/1	CHECK			TITLE:	2.54mm 单排针 1*6P 镀普金
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	PROJ.		APPROVE			Customer No.	320020019
					DIM	TOL							