
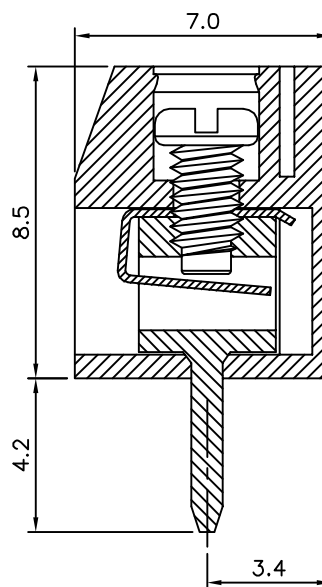


Recommended P.C.B. Layout

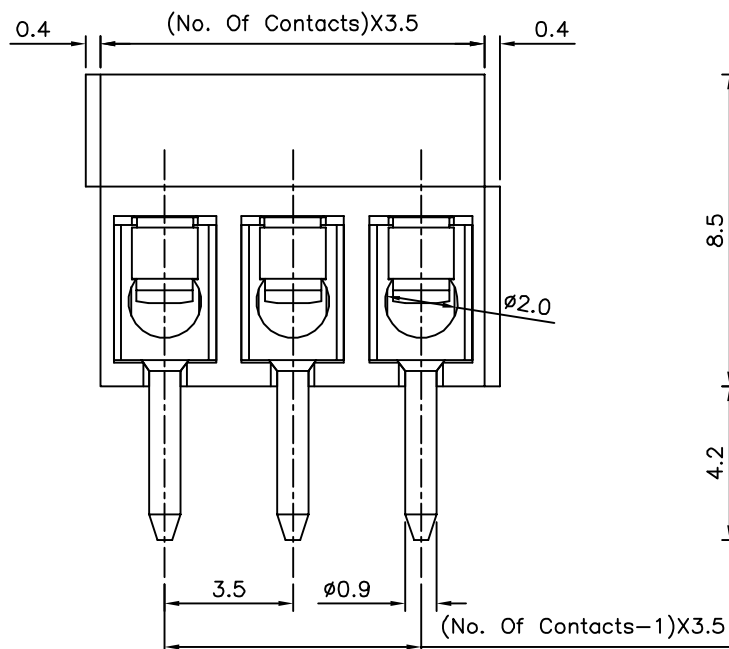

# SPECIFICATION

Current Rating: 10 Amp/Way Max.  
 Voltage Rating: 150V AC  
 Withstanding Voltage: 2000V AC/Minute  
 Test Time=60 Sec/1 PCS  
 Contact Resistance: 20 Milliohms Max.  
 Wire Range: 16~30 AWG  
 Torque: 2kgf.cm/M2  
 Operating Temperature: -40°C~+105°C  
 Soldering Reliability: Test Temperature=250°C±10°C  
 5 Seconds Max.  
 Terminal: Copper Alloy, Tin Plated  
 Screw: Steel, Galvanized And With Cr3+ Plated  
 Wire Guard: Stainless Steel  
 Insulator Body(Housing): Polyamide(UL94V-0), Blue  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

19965

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

REV.

B0

UNLESS OTHERWISE  
 SPECIFIED

TOLERANCES ARE  
 X. ±0.50  
 .X ±0.30  
 .XX ±0.20  
 ANG. ±1°

UNIT  
 mm



NO. REV.

REVISIONS

CHK

DATE

△ B0

NEW RELEASE

HZF

10/26/2014