

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

端子: 磷铜, 镀底30u"MIN, 表面镀金0.8u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40℃ to +105℃

Temperature Range: -40℃ to +105℃

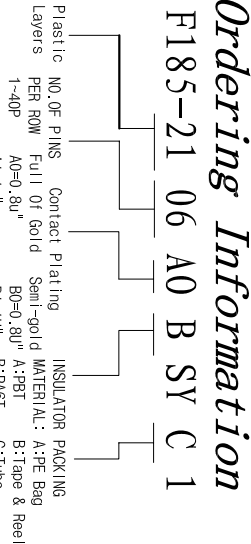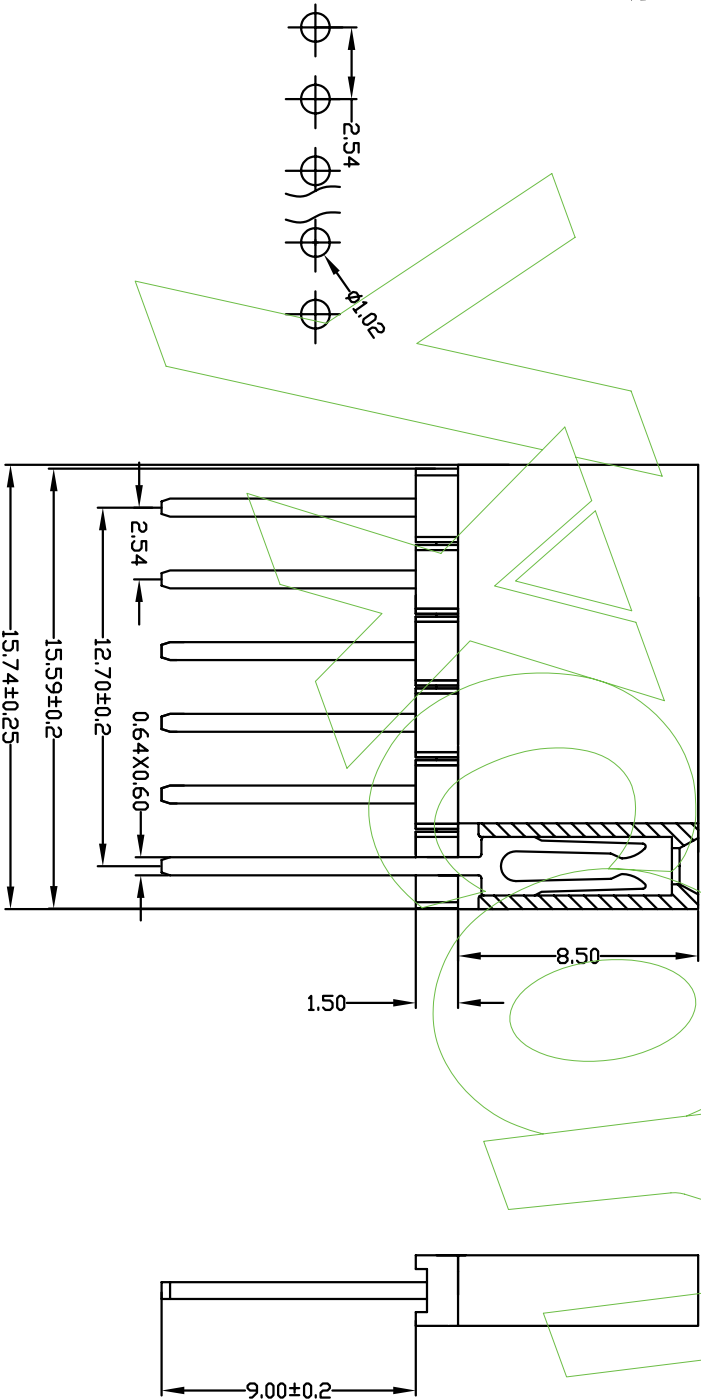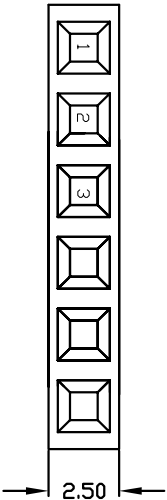

Ordering Information
F185-21 06 A0 B SY C 1

Plastic Layers 1-40P NO. OF PINS Full of Gold Contact Plating Semi-gold INSULATOR PACKING PER ROW A: PE Bag B: Tape & Reel C: Tube D: Tray E: Tray F: Tube+Cap G: Ordinary Tin Plated H: Matte Tin Plated I: Tin-plated High-temperature

Yxcon 东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co., Ltd.

OPERATION		SCALE		Fit	
X.X		±0.25		MM	
X.XX		±0.20		SIZE	
X.XXX		±0.10		SHEET	
Angle		±3°		CHECK	
DIM		TOL		APPROVE	
PROJ.		APPROVE		Customer No.	
DATE		MODIFICATION DESCRIPTION		PART NO.	
1		2		3	
4		5		6	
7		8		9	
10		11		12	