



ST25DV64KC Dynamic RFID Tag



I2C Pullup

Cut trace to disable I2C pullups



Power LED

Cut trace to disable LED




GPO Pullup

Cut trace to remove GPO pullup




PCB antenna


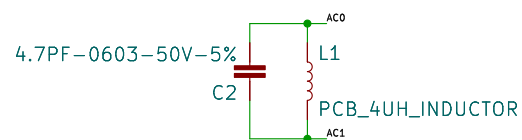


C2 may be changed to improve circuit resonance.
5.6 pF is the initial calculated value.


0.1" Header



Qwiic Connectors



Power decoupling

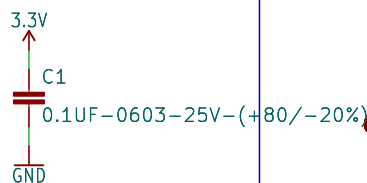

Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>



TITLE: \${PROJECTNAME}

Design by: >DESIGNER

REV:
>REV

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Sheet: /

File: /work/00_PlanTech

Title:

Size: User

Date:

KiCad E.D.A. eeschema 7.0.2

Rev:

Id: 1/1