3.7V 500mA LiPo Battery Charger

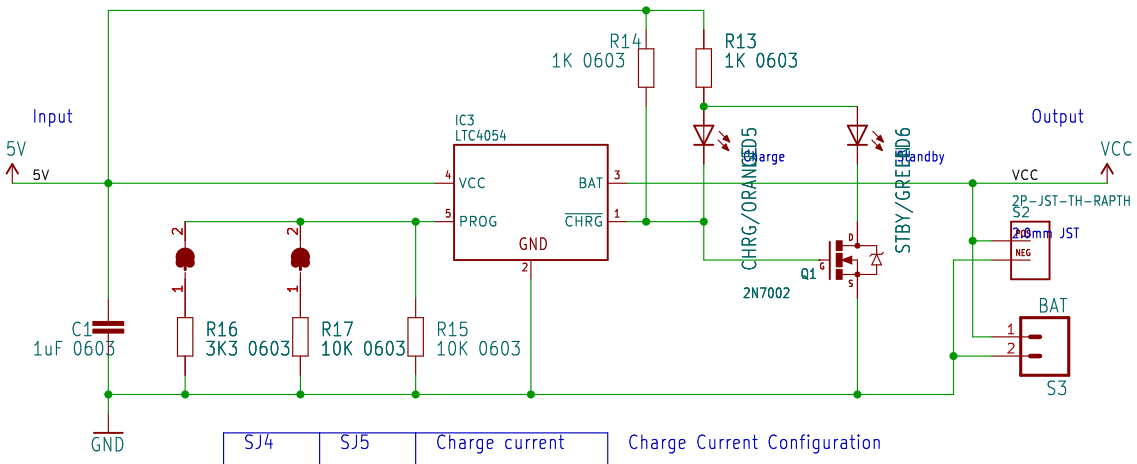

SJ4	SJ5	Charge current
Open	Open	100 mA
Open	Closed	200 mA
Closed	Open	403 mA
Closed	Closed	503 mA

Charge Current Configuration

3.3V Power Supply

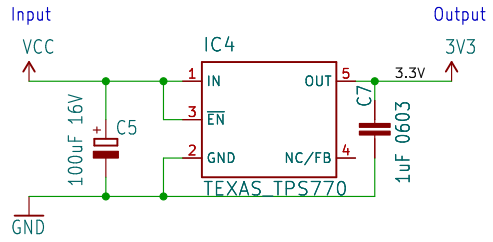

Keypad Matrix

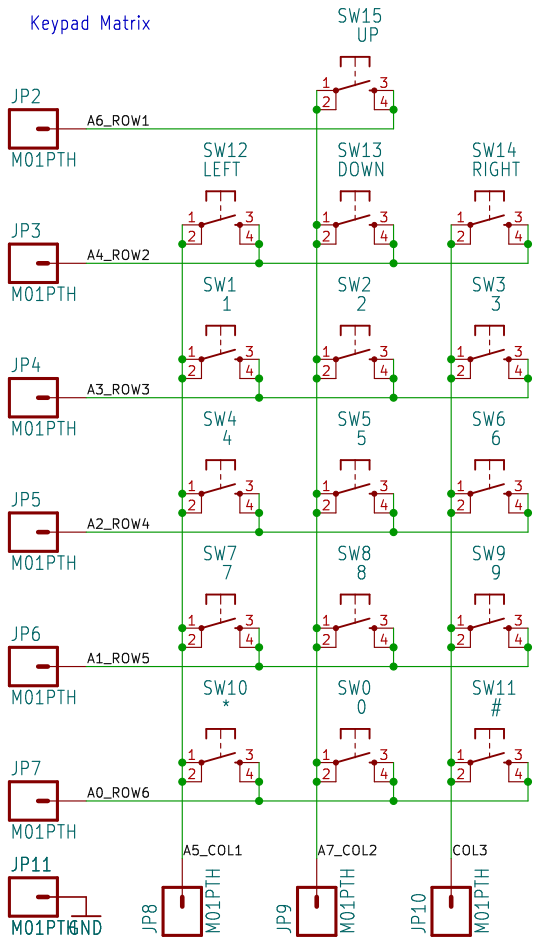

GSM Module

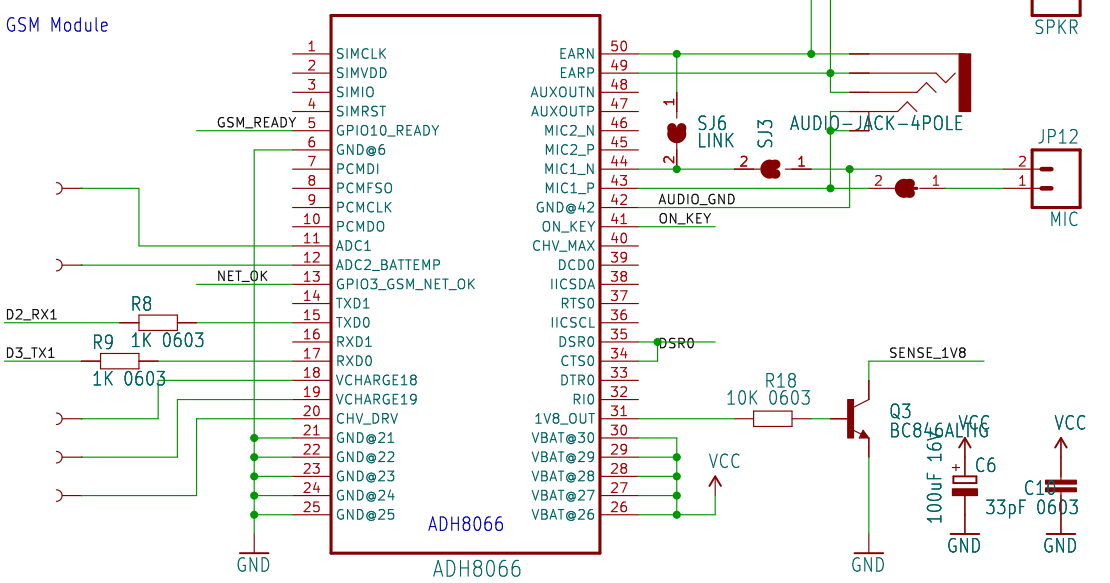

ArduPhone

V1.2 (2013-11-26) www.freetronics.com/phone

(C)2013 Freetronics Pty Ltd | SKU: PHONE

Released under the TAPR Open Hardware License: www.tapr.org/ohl

LCD Module Header

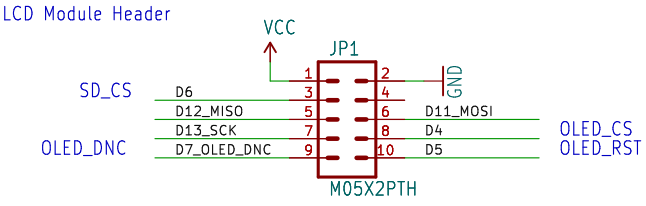

ICSP Header

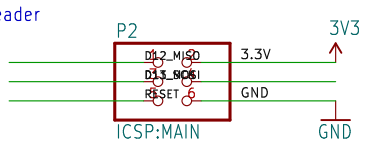





USB-Serial Converter

TODO:
Antenna mount
Power switch

3 power rails:
VCC: Unregulated battery voltage
5V: USB 5V (only when USB connected)
3V3: Regulated 3.3V from VCC

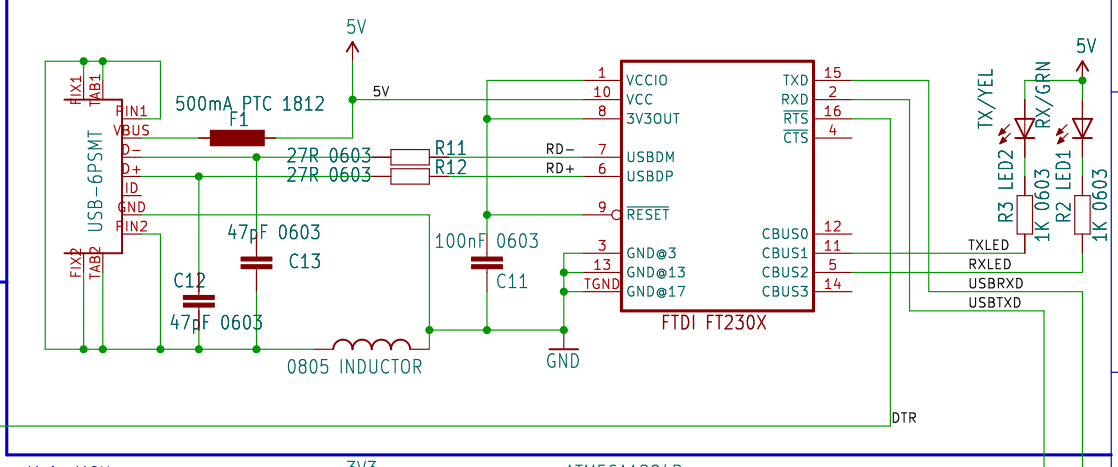

Main MCU

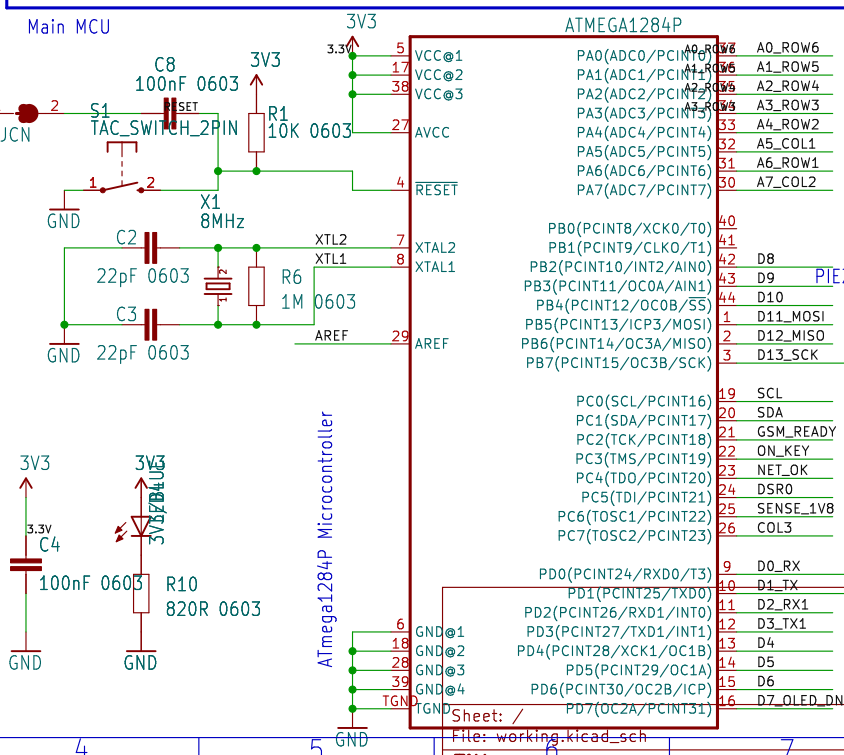

Arduino Headers

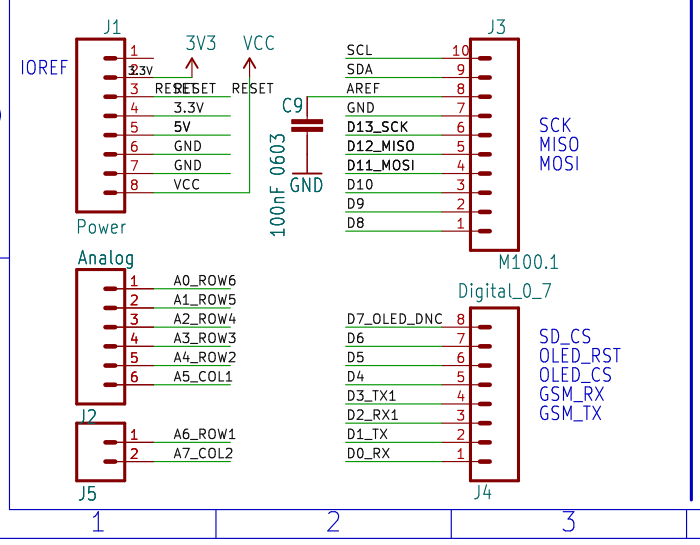

Sheet: /		
File: working.kicad_sch		
Title:		
Size: User	Date:	**Rev:**
KiCad E.D.A. eeschema 7.0.6		Id: 1/1