


InvenSense MPU-9150:
 * 3-axis gyroscope
 * 3-axis accelerometer
 * 3-axis compass

Module operating voltage: 2.75 – 6Vdc (<0.35V loss in LDO, 2.4V min for MPU-9150)
 I2C address: 0x68 (AD0 jumper open) / 0x69 (AD0 jumper closed)
 I2C pull-ups disabled by default. Bridge solder jumpers to enable.
 5V-safe I2C buffers.

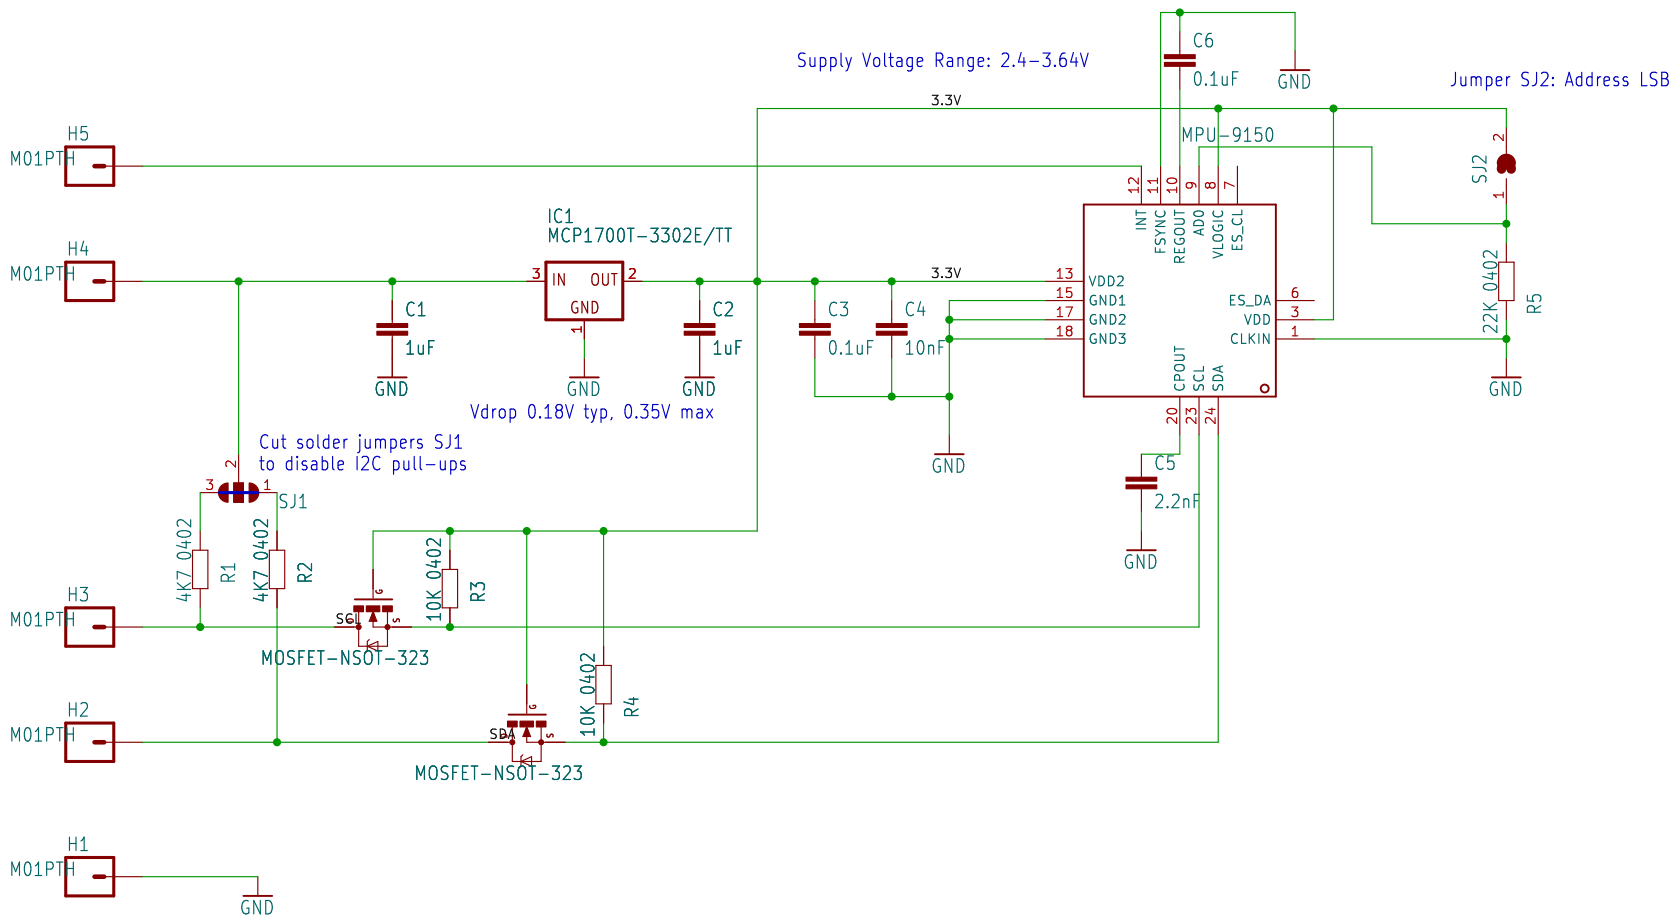

Copyright 2014 Freetronics Pty Ltd
 Designed by Adelmo Eloy
 Released under the TAPR Open Hardware License
 www.tapr.org/OHL

Freertronics IMU9 9-DOF Sensor

www.freertronics.com/imu9

Sheet: 7

File: working_kicad_sch

Title:

Size: User

Date:

KiCad E.D.A. eeschema 7.0.6

Rev:

Id: 1/1