




Raspberry Pi Header

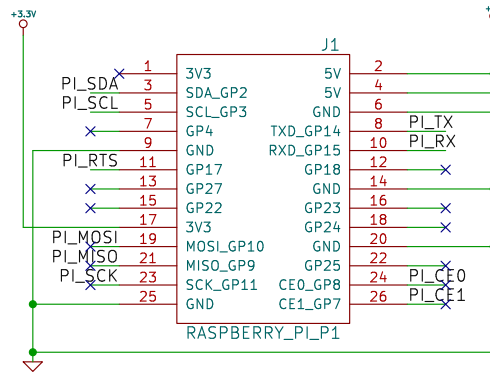


3.3V LDO

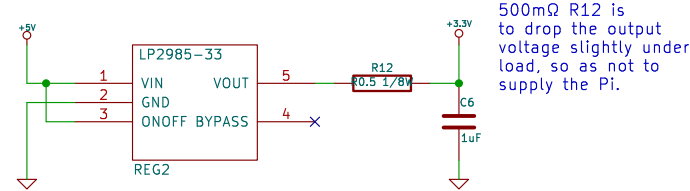


MCU

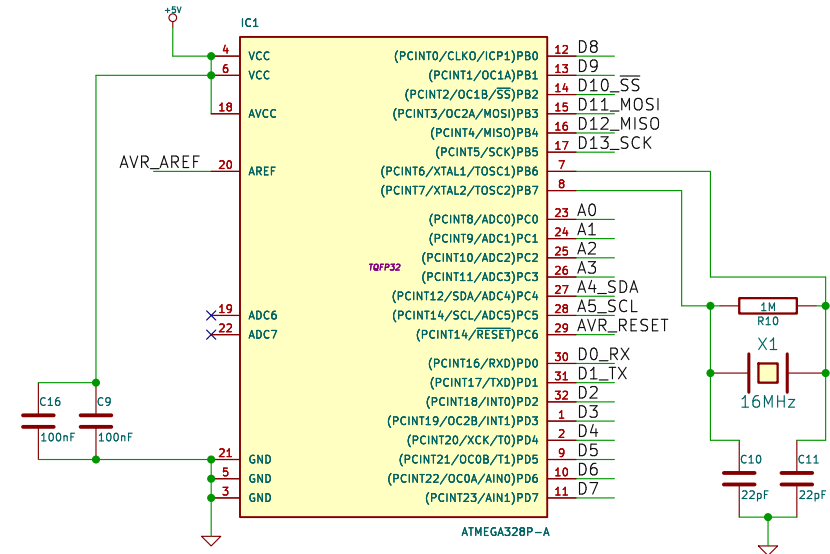


Arduino Header

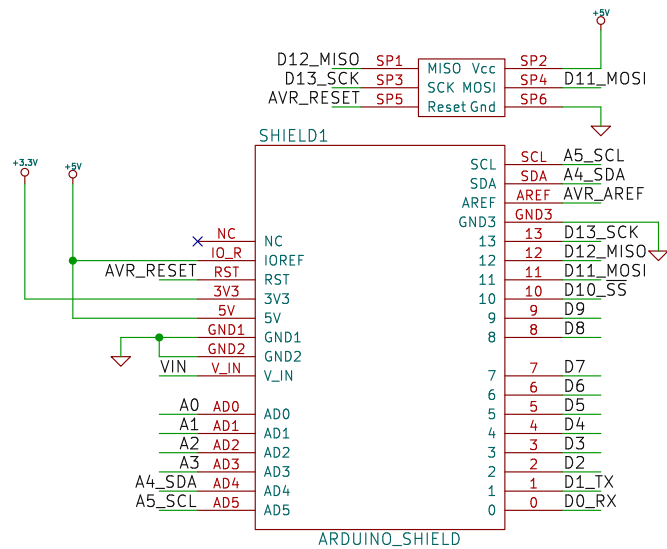

I/O Level Shifting

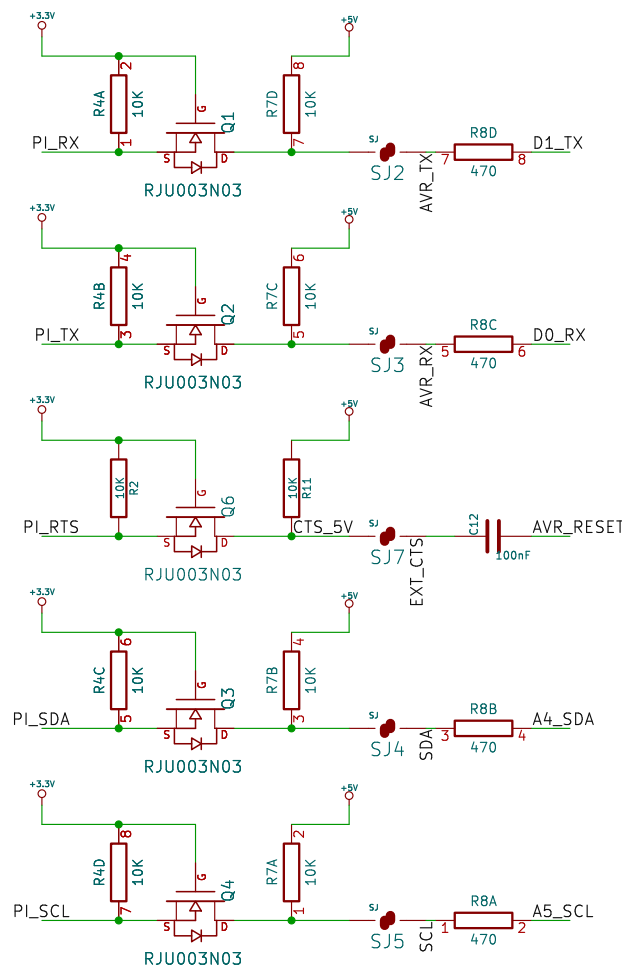

Reset Circuit

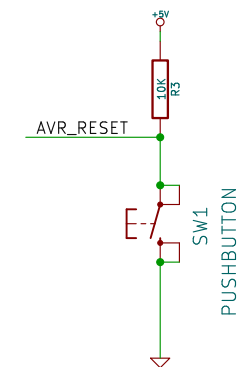


RC network stretches the low pulses of UART data to create visible blinking pulses.

Discharge RC=0.2s

Charging limited by R17, (RC=50us.) This does mean some sequences, like 0xFF at 115200 baud (one 8us pulse) will fail to trigger the LED. Even repeated 0xFF will, though.

External Serial Header

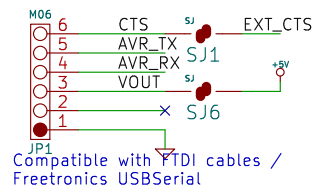

LEDs

