




Raspberry Pi A+/B+ Header

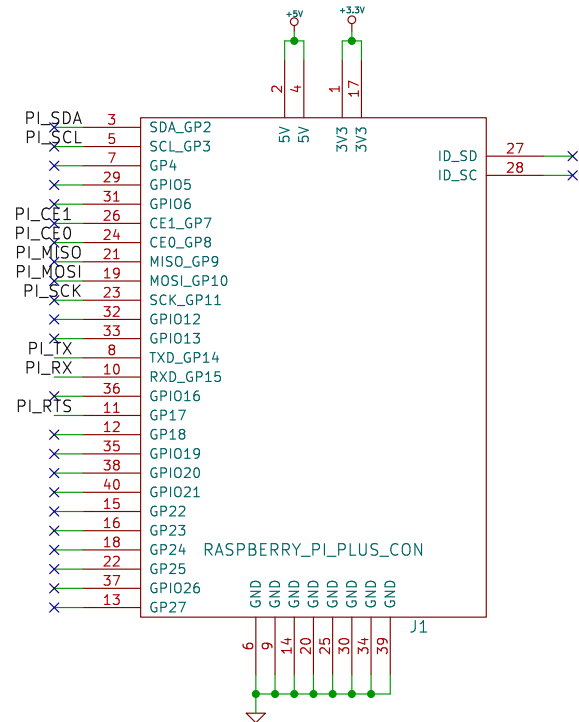


I/O Level Shifting

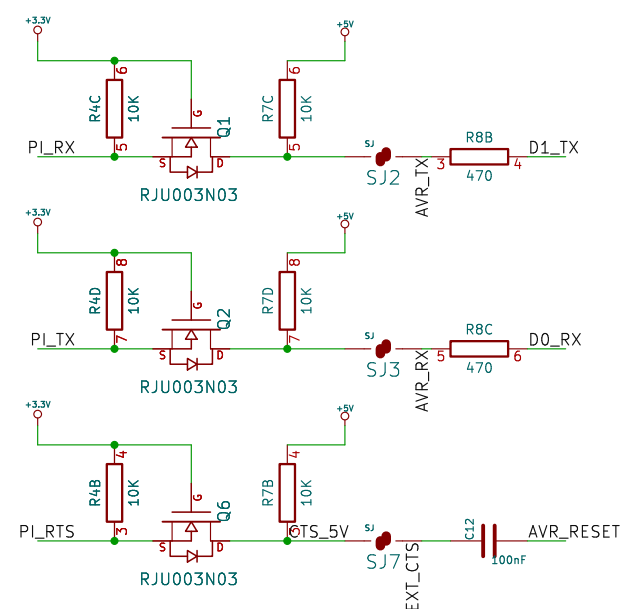


MCU Reset

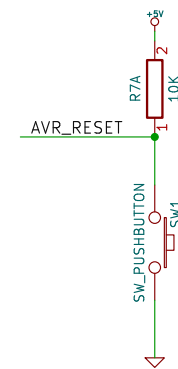


MCU

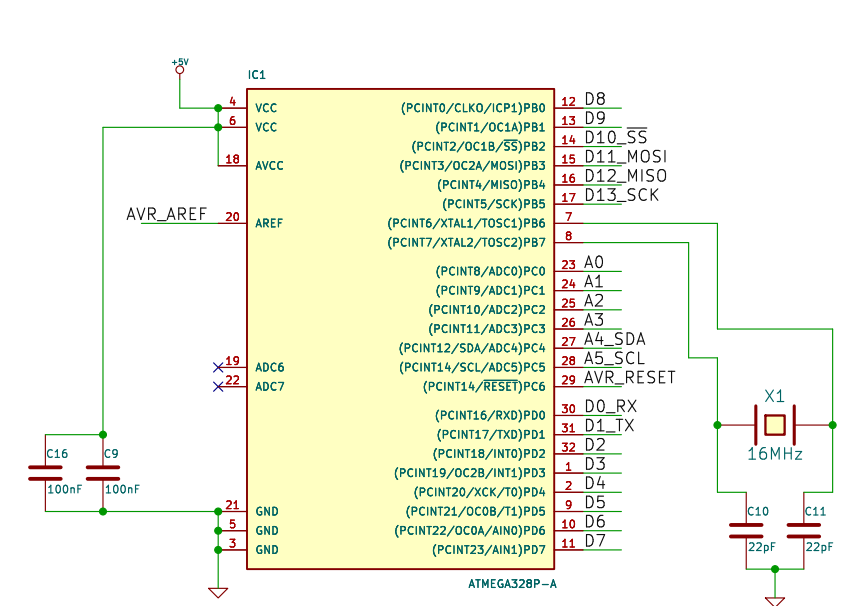

Arduino Header

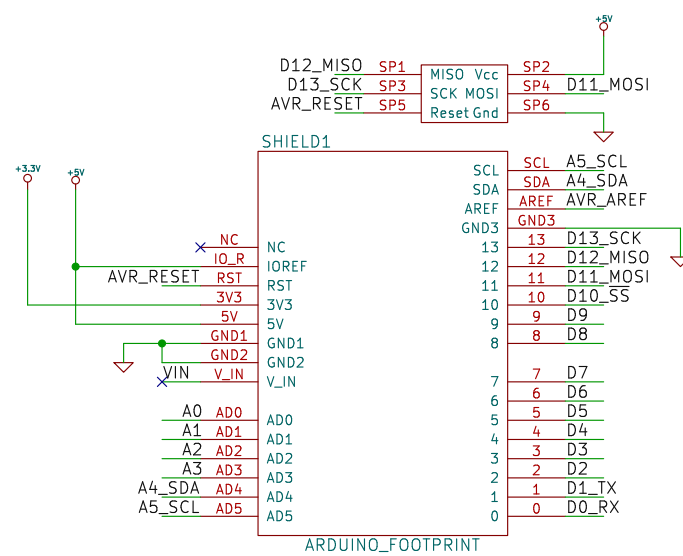


External Serial Header



Compatible with FTDI cables /
Freetronics USBSerial

LEDs

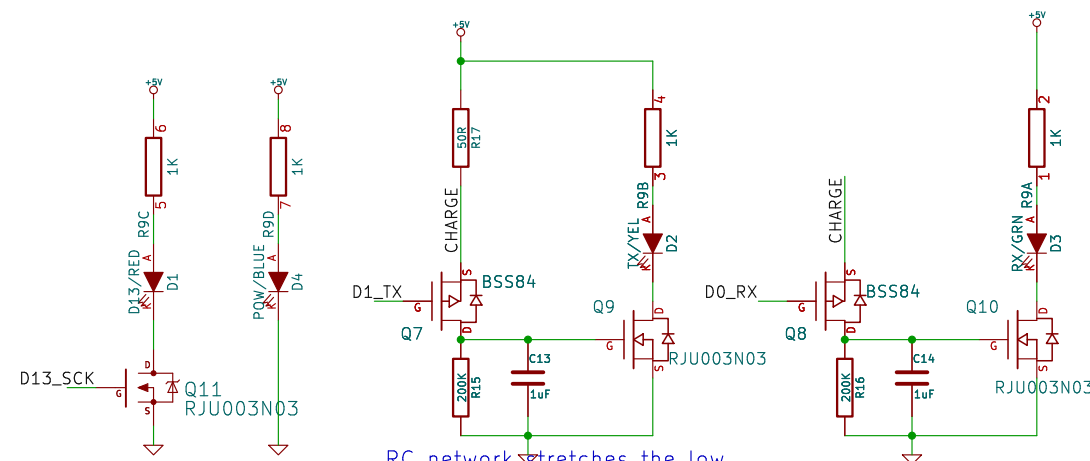

RC network stretches the low pulses of UART data to create visible blinking pulses.

Discharge RC=0.2s

Charging limited by R17, (RC=50us.)
This does mean some sequences, like 0xFF at 115200 baud (one 8us pulse) will fail to trigger the LED. Even repeated 0xFF will, though.

PiLeven Mini – Arduino Compatible Raspberry Pi board

(C) 2015 Freetronics Pty Ltd

freetronics.com/pileven

Licensed under TAPR Open Hardware License

tapr.org/ohl

Sheet: /

File: working.kicad_sch

Title: PiLeven Mini

Size: A3

Date: Fri 30 Jan 2015

Rev: V1.1

KiCad E.D.A. eeschema 7.0.6

Id: 1/1