




USB Connection & Power

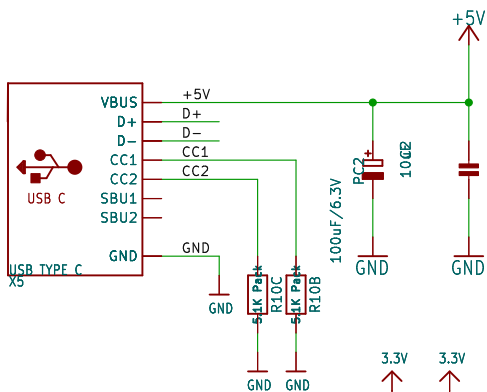


POWER SUPPLY: 3.3V

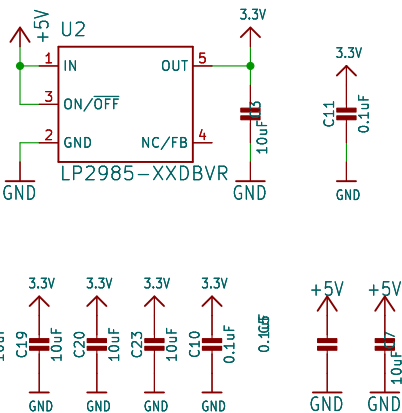


JST PH




STEMMA QT







TACT SWITCHES

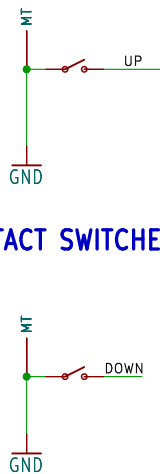


POWER & D13 LEDs

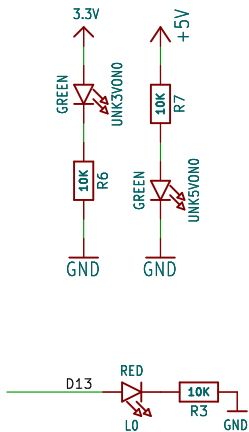



NEOPIXEL LED

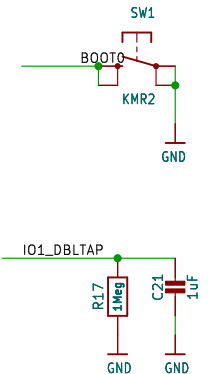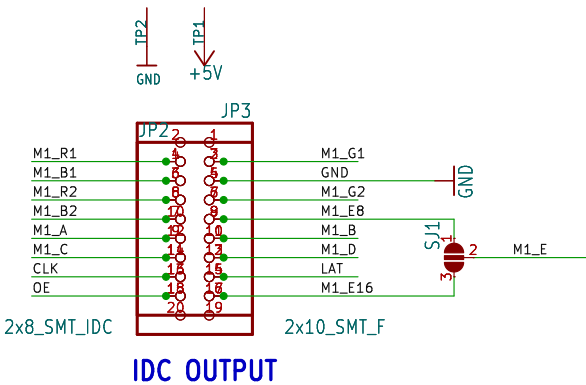


GPIO Port




LEVEL SHIFTERS

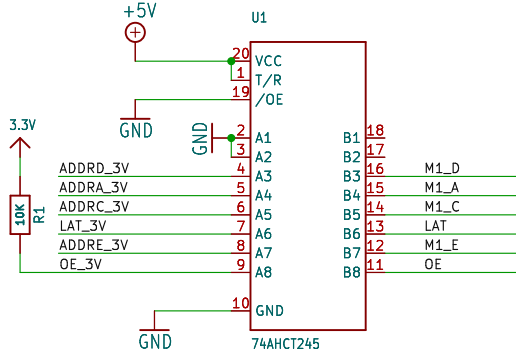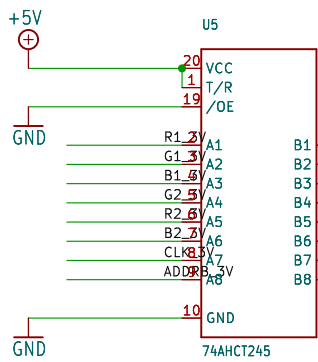

ACCELEROMETER

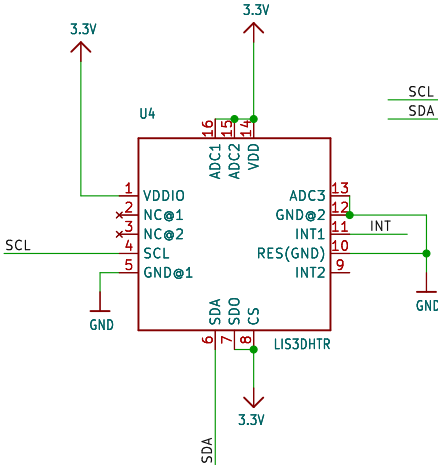

LIGHT SENSE



Author: Limor Fried & Dean M.

\${PROJECTNAME}

\${CURRENT_DATE}

Sheet: \${#}/\${##}

Working on a sch

Title:

Size: User Date: KiCad E.D.A. eeschema 7.0.6

Rev: Id: 1/1

ESP UART on sercom0
SPI sercom2 DOP0: 0x00
UART sercom3 TXPO: 0x00
I2C sercom5
SPI Flash on QSPI, no longer possible to use with sercom SPI
I2S: SCK0: D3
MCK0: D2
FS0: D9
SDI: D1
SDD: D8
SPI1: Sercom1 DOP0: 0x00
SCK: D13
MISO: D12
MOSI: D11
CS: D10
I2C1: A4, A5
PCC:
DEN1: MOSI
DEN2: SCK
CLK: MISO
D0: D13
D1: D12
D2: D10
D3: D11
D4: D9
D5: D8
D6: D1
D7: D0
D8: D5
D9: D6
TCC1:
W00: D13
W01: D12
W02: D10
W03: D11
W04: D9
W05: D8
W06: D1
W07: D0
TCC0:
W00: D7
W01: D4
W02: D5
W03: D6
W04: D3
W05: D2
W06: MOSI
W07: SCK