



APPLICATION EXAMPLE




To reduce output ripple, it is recommended to add a LC filter to the output port.
L: Recommended parameter 10 ~ 47μH.


5V regulator

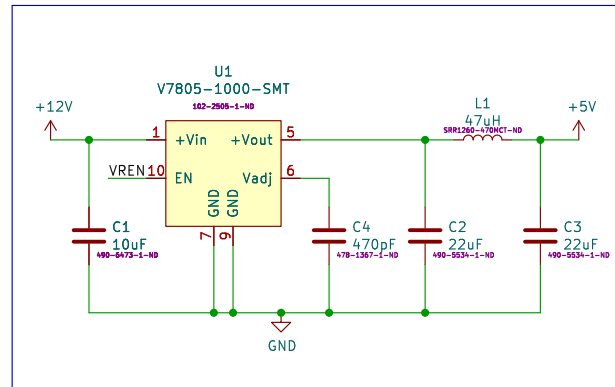

pHAT identification EEPROM

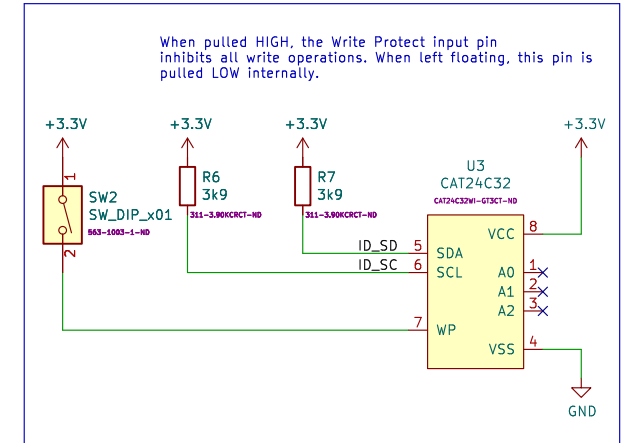

EXAMPLE 1-1: TYPICAL MCP2003B APPLICATION

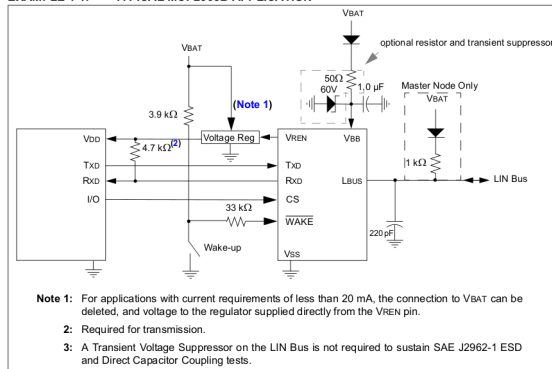


TP1
TestPoint


TP2
TestPoint

TP6
TestPoint

LIN transceiver

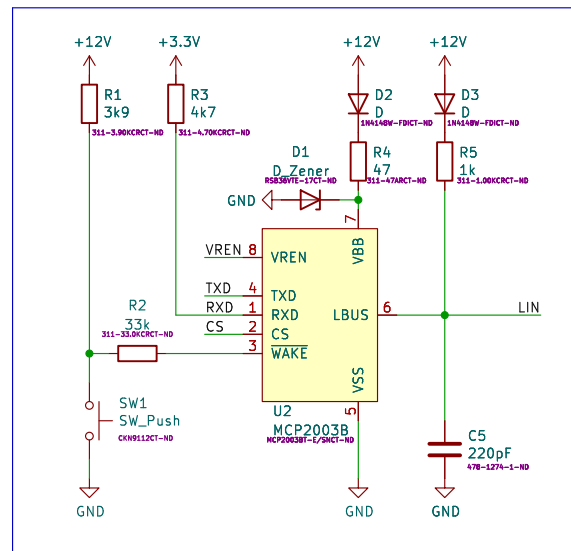

J2 RPI_GPIO

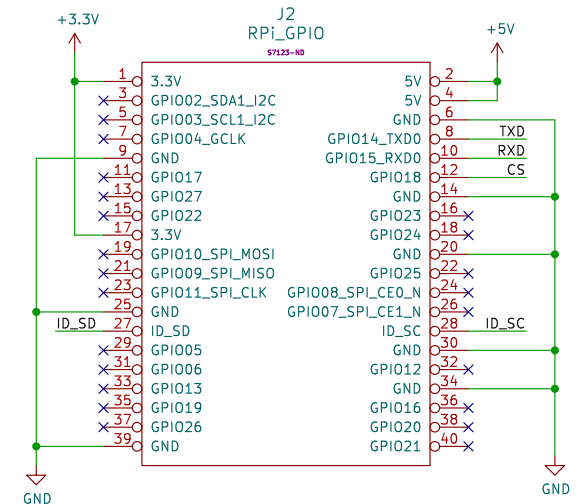

Sheet: /
File: working.kicad_sch

Title:

Size: A4
KiCad E.D.A. eeschema 7.0.6

Date:

Rev:
Id: 1/1