

Supply Input

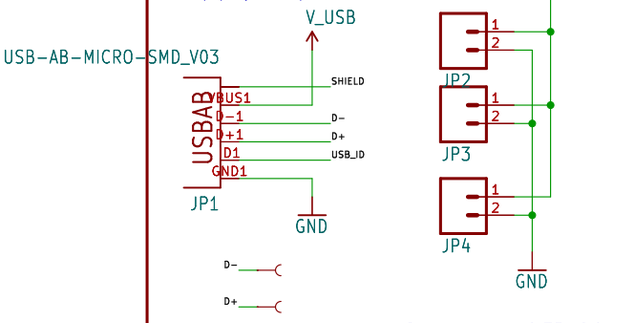


Supply range: 4.35–6.4V

Battery Input




Battery Range: 3.3–4.2V

Supply Output




Shutoff Switch

SYSOFF controls supply to the V_OUT pin.
SYSOFF is active-high
HIGH=OFF
LOW=ON




Charge Current Select

EN2	EN1	Current
0	0	100mA
0	1	500mA
1	0	ISET
1	1	Standby

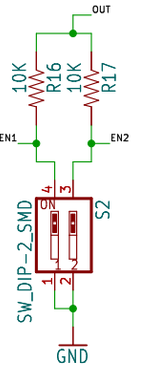


BQ24075 – 1.5A USB-Friendly LiPo Battery Charger & Power-Path Management

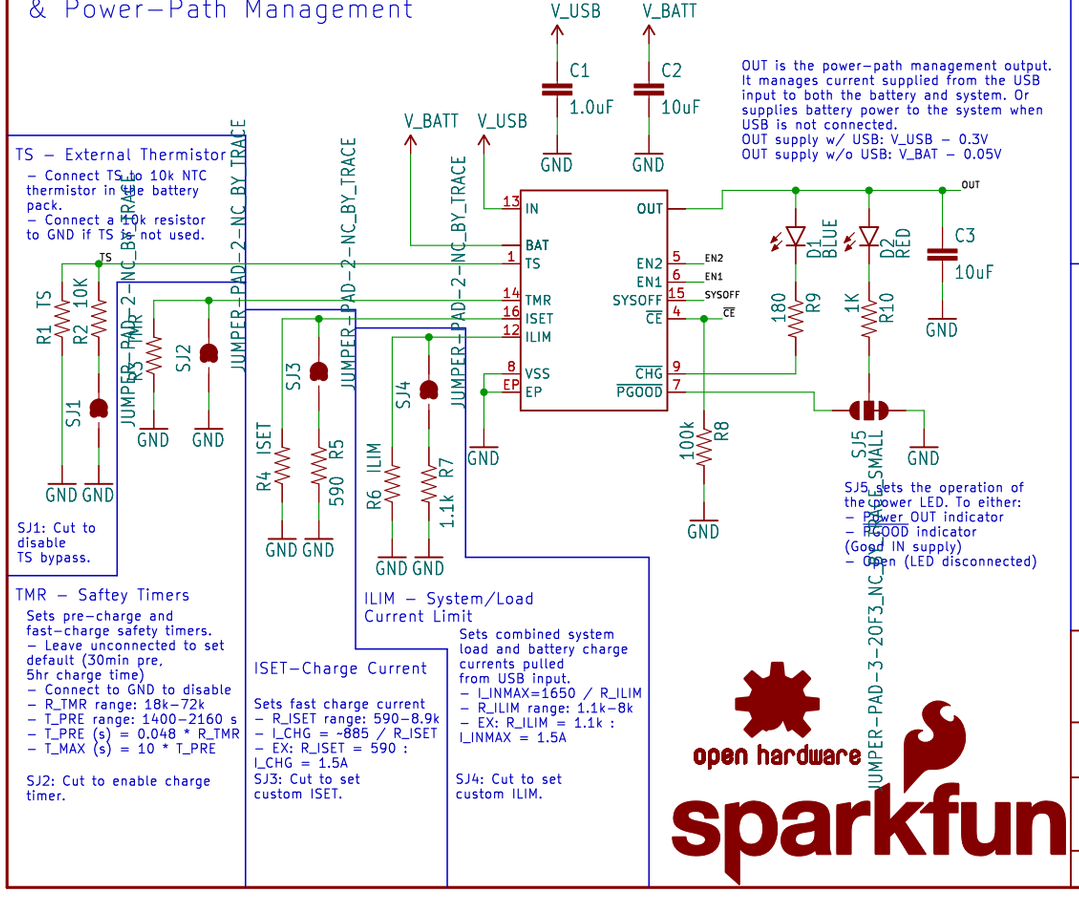


I2C Pull-Ups


V_PU is an externally supplied voltage to set the pull-up resistor HIGH voltage.
Allowable range: 1.62–6V



Headers

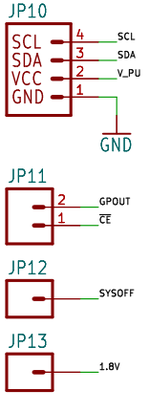

BQ27441-G1 Fuel Gauge

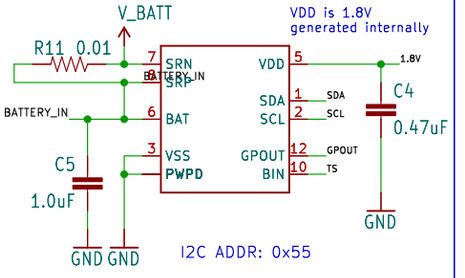

Released under the Creative Commons Attribution Share-Alike 4.0 License
https://creativecommons.org/licenses/by-sa/4.0/

TITLE: ${PROJECTNAME}

Design by: Jim Lindblom

REV: v10

Sheet: /

File: Working_Board.sch

Date: ${CURRENT_DATE}

Sheet: ${#}/${##}

Title:

Size: User | Date: | Rev:

KiCad E.D.A. eeschema 7.0.6 | Id: 1/1