




Voltage Regulator and Battery Charger

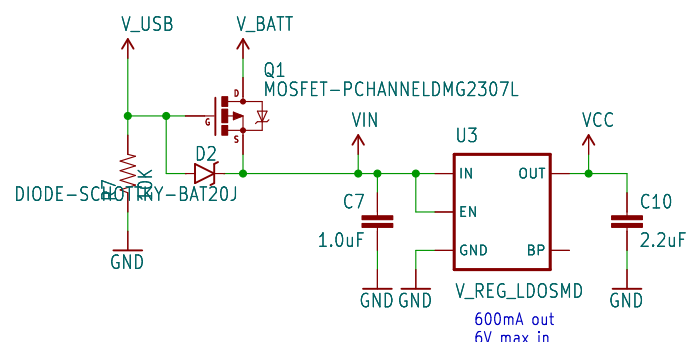


Lithium-Polymer Battery Charger (1-cell)

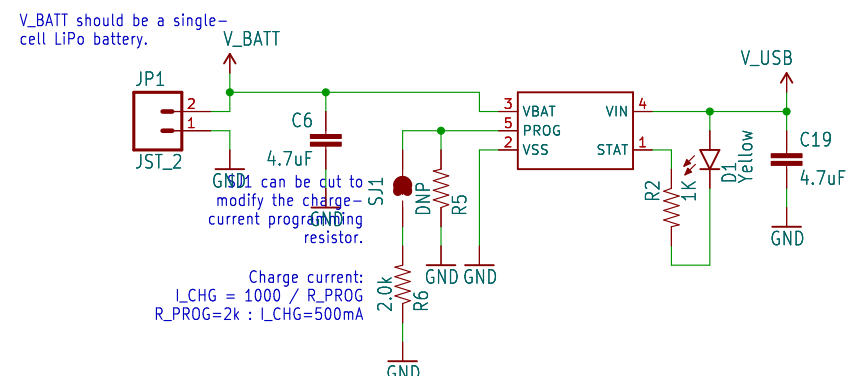


FT231XS (USB-to-Serial Converter)

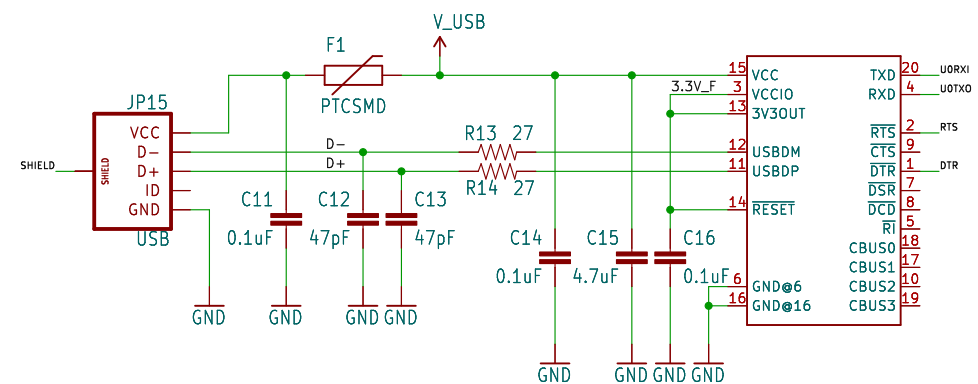


3.3V-1V ADC Scaling

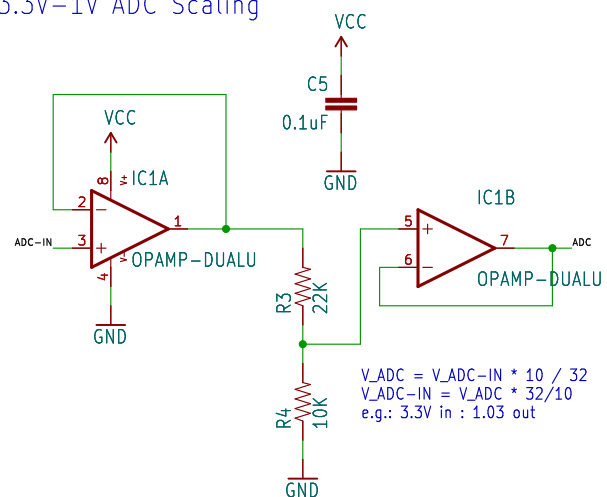

WS2812 LED and Output

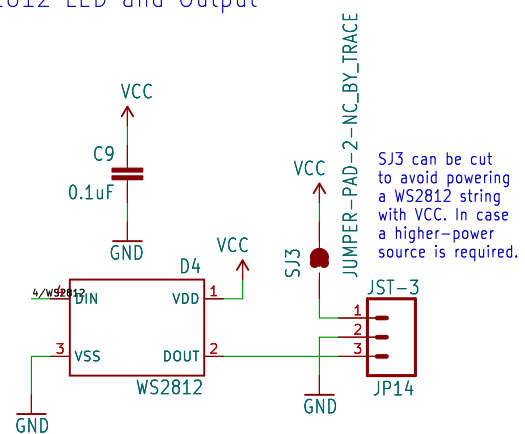


Power LED

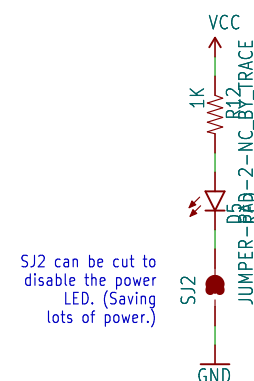


Active-Low Button - GPIO0




Si7021 Temperature and Humidity Sensor & I2C Header

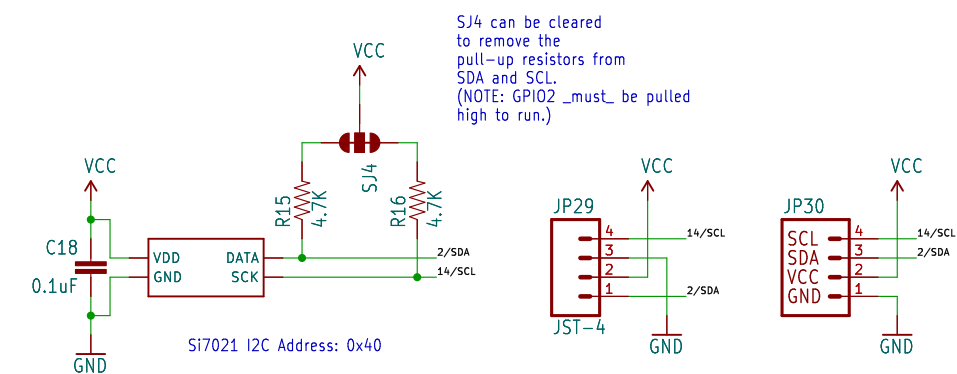


ESP8266EX

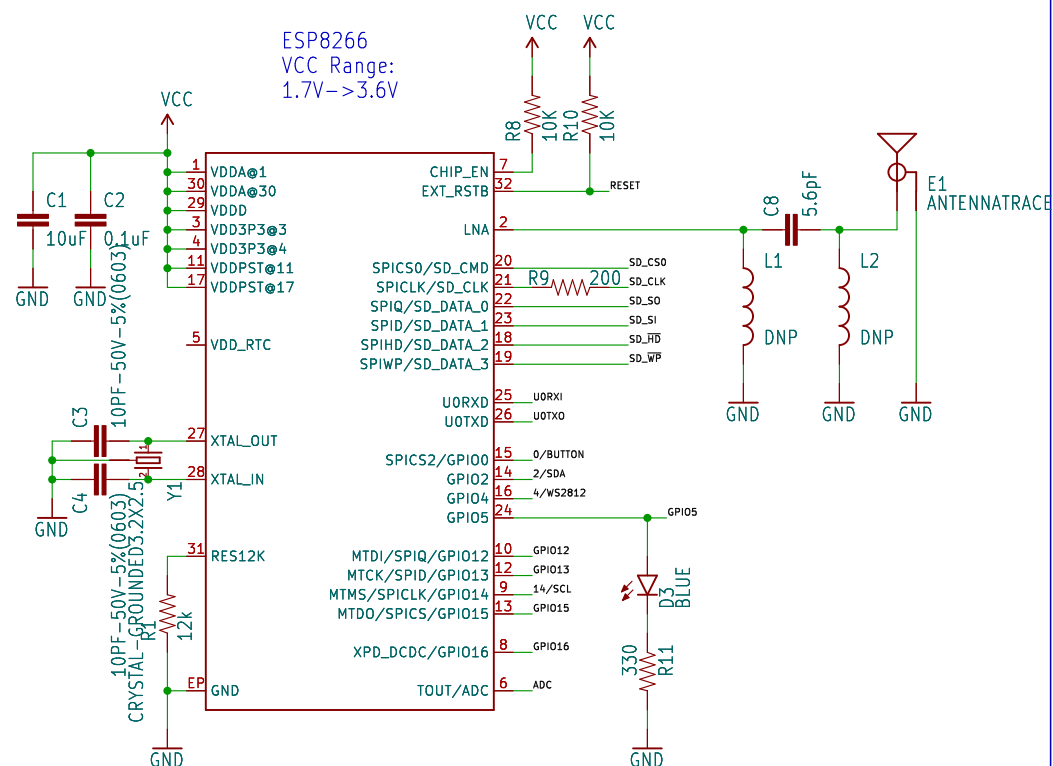


Output Headers

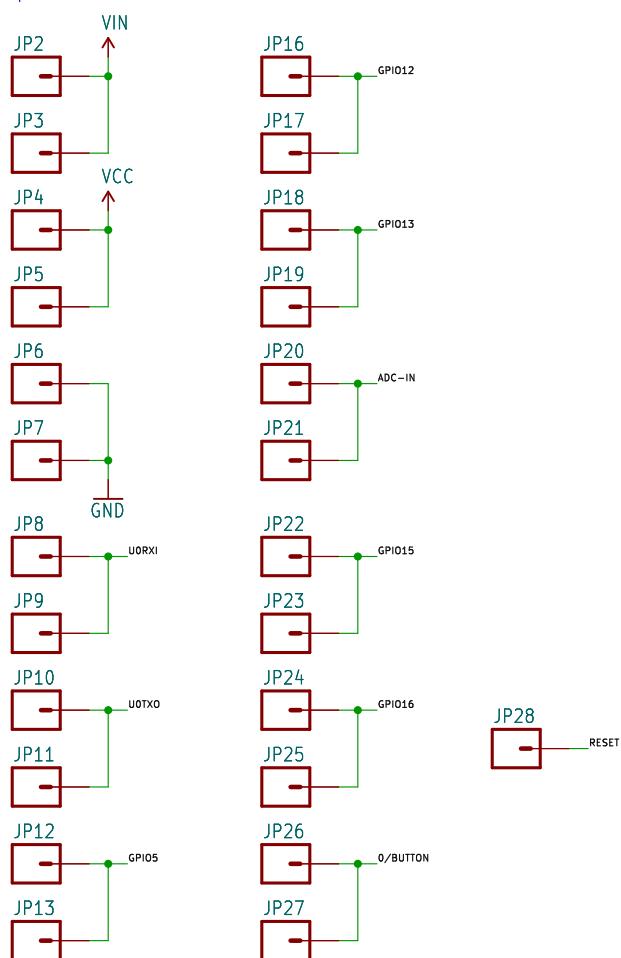


32 Mbit (4MB) Flash

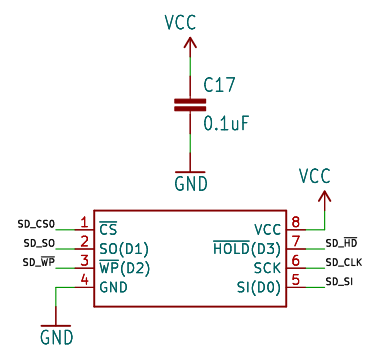

Auto-Reset



Run Default Pull-Ups



Released under the Creative Commons Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Jim Lindblom
Auto-Reset circuit based on NodeMCU Dev Kit

Date: \${CURRENT_DATE}

Size: User
KiCad E.D.A. eeschema 7.0.6

REV: v10

Sheet: \${#}/\${##}

Rev: Id: 1/1