



ACS723LLCTR-05AB-T2

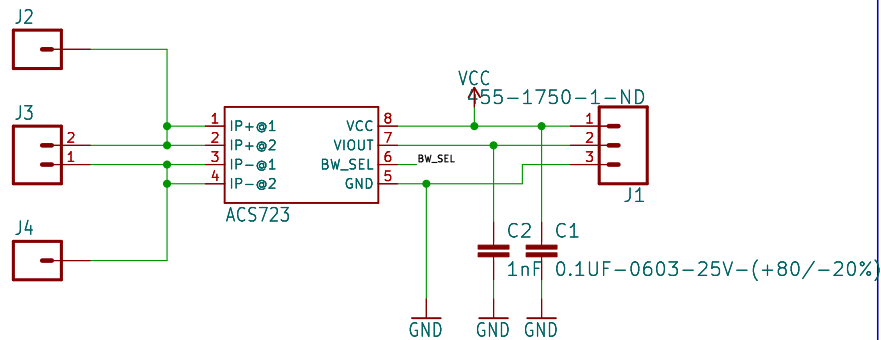

NOTES:
VCC: 4.5V-5.5V
Current Range: +/-5A
Zero Current Output Voltage = VCC x 0.5
Sensitivity (-5A(min) < Current Sensed < 5A(max)) = 400mV/A

Bandwidth Select



JP1 (Sets bandwidth):
OPEN = 20kHz Low Noise (default)
CLOSED = 80kHz



Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Pete Dokter
Revision By: Eric Orosel
REV: v10

Date: \${CURRENT_DATE} Sheet: \${#}/\${##}

Size: User Date: Rev:
KiCad E.D.A. eeschema 7.0.6 Id: 1/1