



Half Bridge Drivers

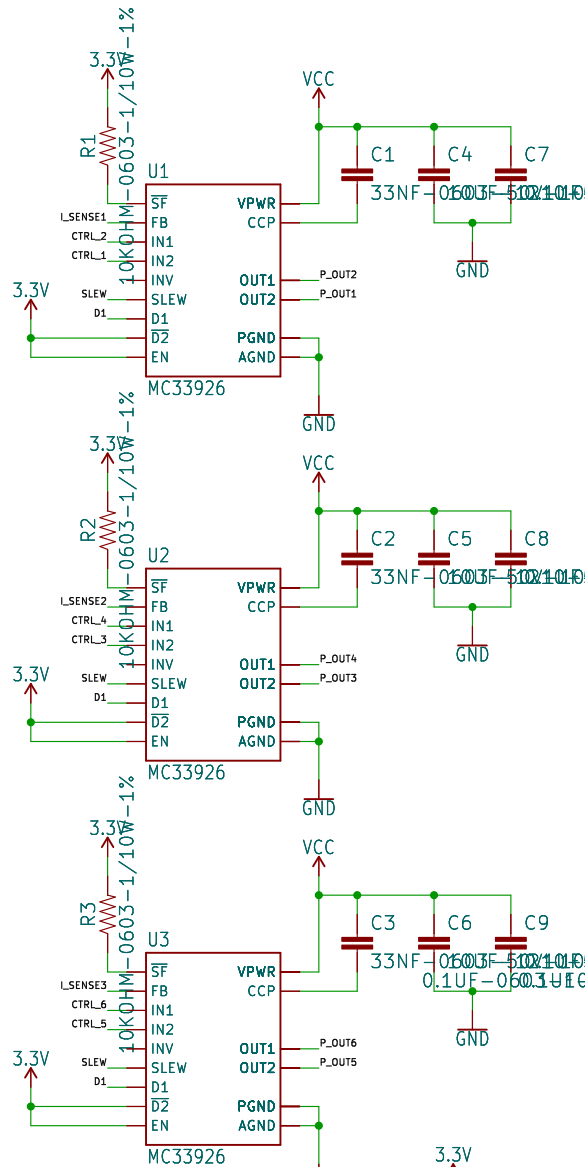

Slew Rate:
GND - SLOW - 3 us
3.3V - FAST - 1.45 us


Feedback Current Amplifiers

For more information about J2-4, refer to the hookup guide.

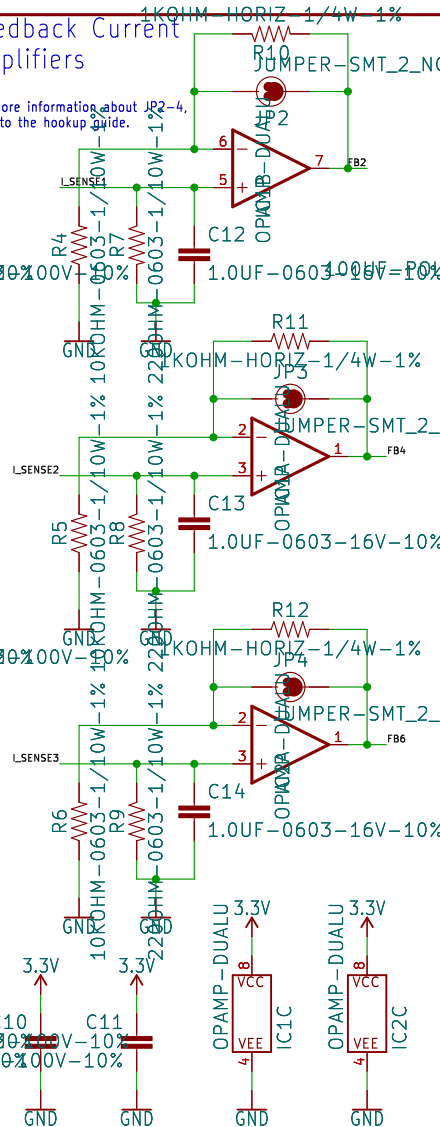


Power Supply

NOTE: For VCC of 5V, close JP5 to bypass the DC/DC converter

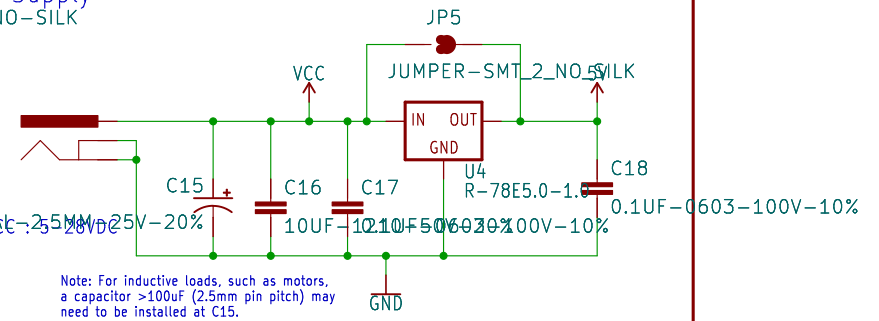


Note: For inductive loads, such as motors, a capacitor >100uF (2.5mm pin pitch) may need to be installed at C15.

Protection Diodes

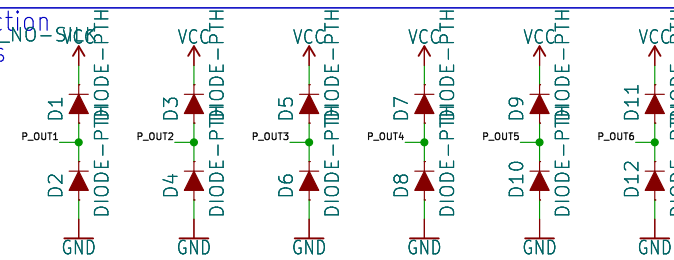

Connectors

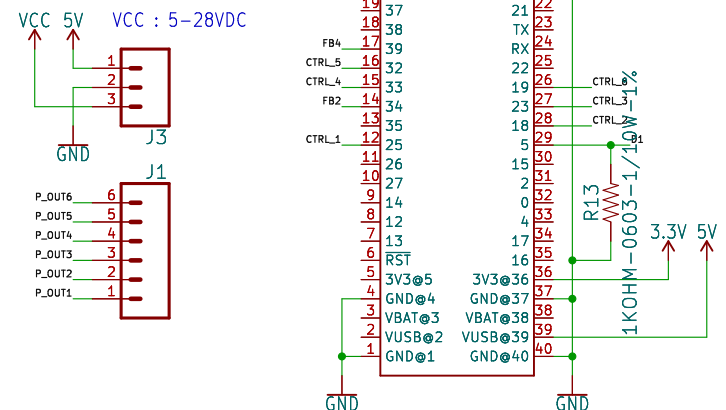

Released under the Creative Commons Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Alex Wende

REV: v10

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User
KiCad E.D.A. eeschema 7.0.6

Rev: Id: 1/1