




Voltage Regulator and Battery Charger

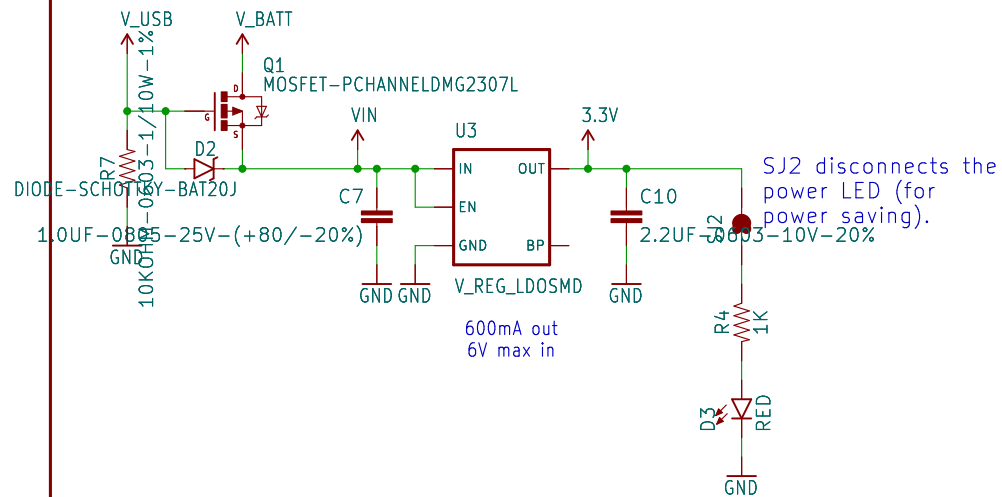


Lithium-Polymer Battery Charger (1-cell)

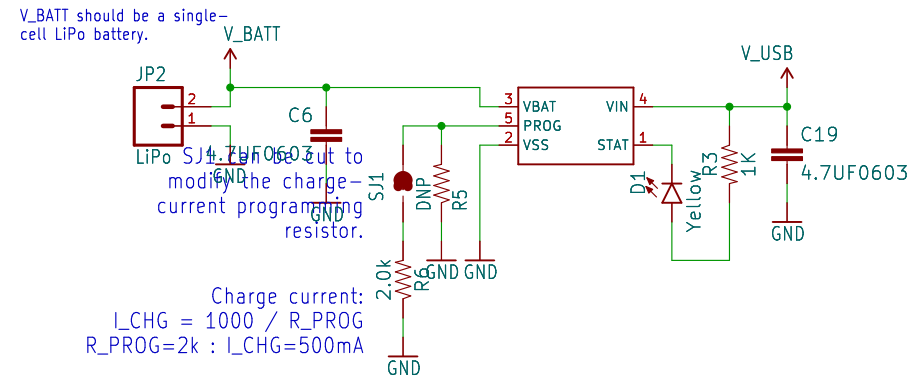


FT231XS (USB-to-Serial Converter)

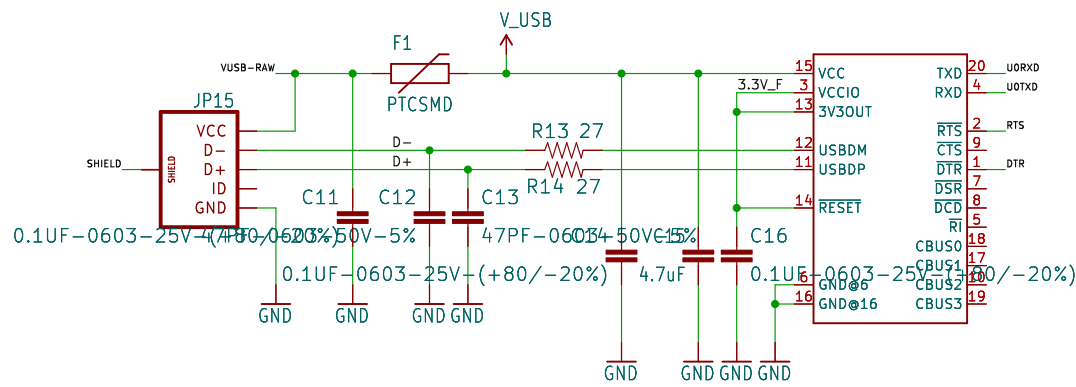

Espressif ESP32

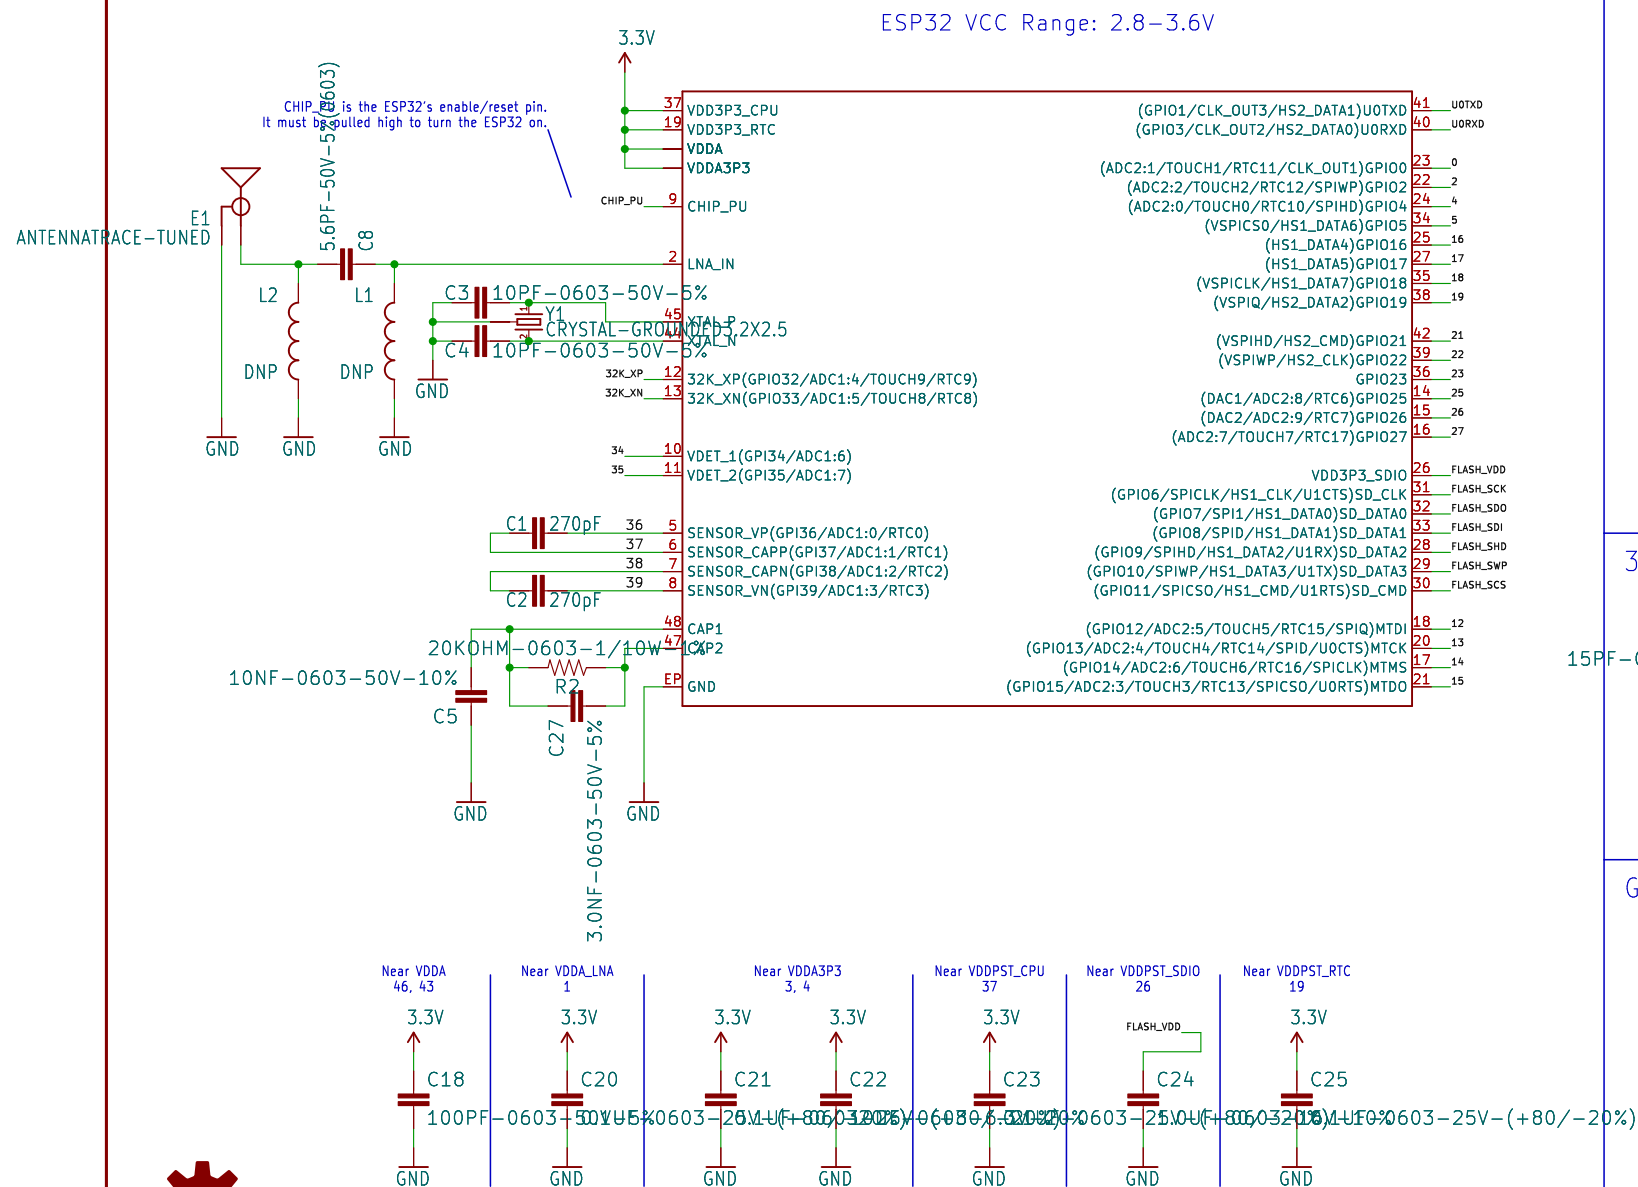


W25Q32FVSS - 4MB SPI Flash

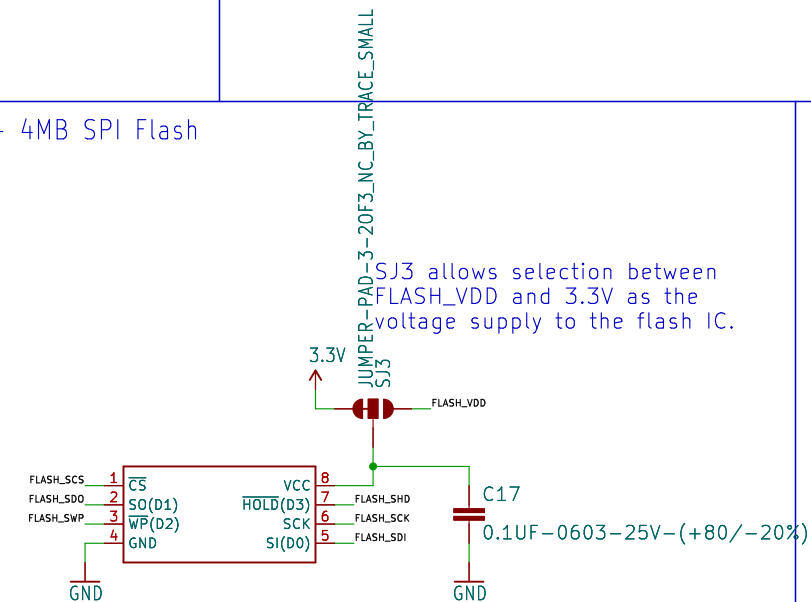

Auto-Reset


Pin	Default	Boot	Download
GPIO0	1	1	0
U0TXD	1	1	x
GPIO2	0	x	0
GPIO4	0	x	x
MTDO	1	x	x
GPIO5	1	1	x

If U0TXD, GPIO2, GPIO5 are floating, GPIO0 determines boot mode

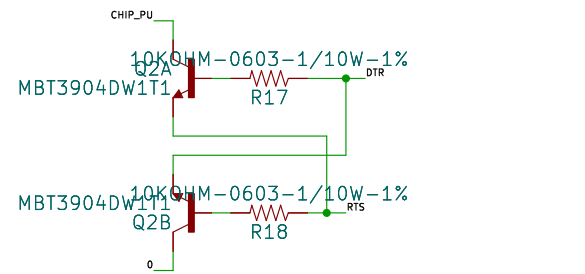

If DTR is LOW, toggling RTS from HIGH to LOW resets to run mode.
If RTS is HIGH, toggling DTR from LOW to HIGH resets to bootloader.

Headers

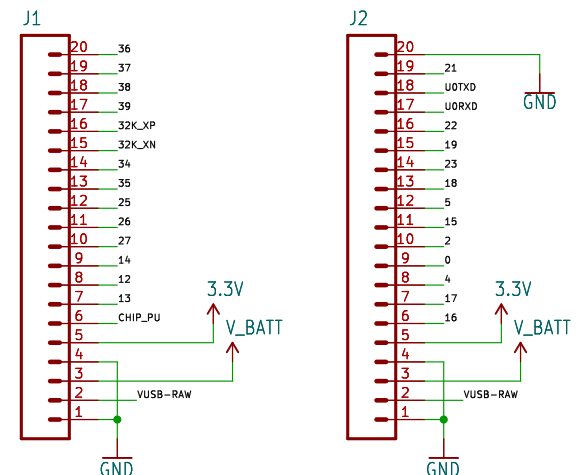

Released under the Creative Commons Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Jim Lindblom

REV: v10

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User

Date: KiCad E.D.A. eeschema 7.0.6

Rev: Id: 1/1

