



V_USB – 6V MAX
V_BATT – Single Cell (4.2V MAX)

V_BATT should be a single-cell LiPo battery.



Pin	Default	Boot	Download
GPIO0	1	1	0
U0TXD	1	1	x
GPIO2	0	x	0
GPIO4	0	x	x
MTD0	1	x	x
GPIO5	1	1	x

If U0TXD, GPIO2, GPIO5 are floating, GPIO0 determines boot mode

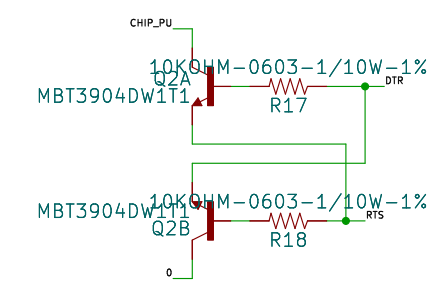

If DTR is LOW, toggling RTS from HIGH to LOW resets to run mode.
If RTS is HIGH, toggling DTR from LOW to HIGH resets to bootloader.

THIS IS A FOUR-LAYER BOARD!

Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Mike Hord
Revised by: Alex Wende

	Sheet: 7
Date: {CURRENT_DATE}	File: Working Capital Sch
	Title:

Size: User		Date:
KiCad E.D.A.	eeschema	7.0.6

REV:
v20

Sheet: $\$ \{ \# \} / \$ \{ \#\# \}$

Rev:
Id: 1/

 **sparkfun**
Original ESP32 Thing by Jim Lindblom

Original ESP32 Thing by Jim Lindblom