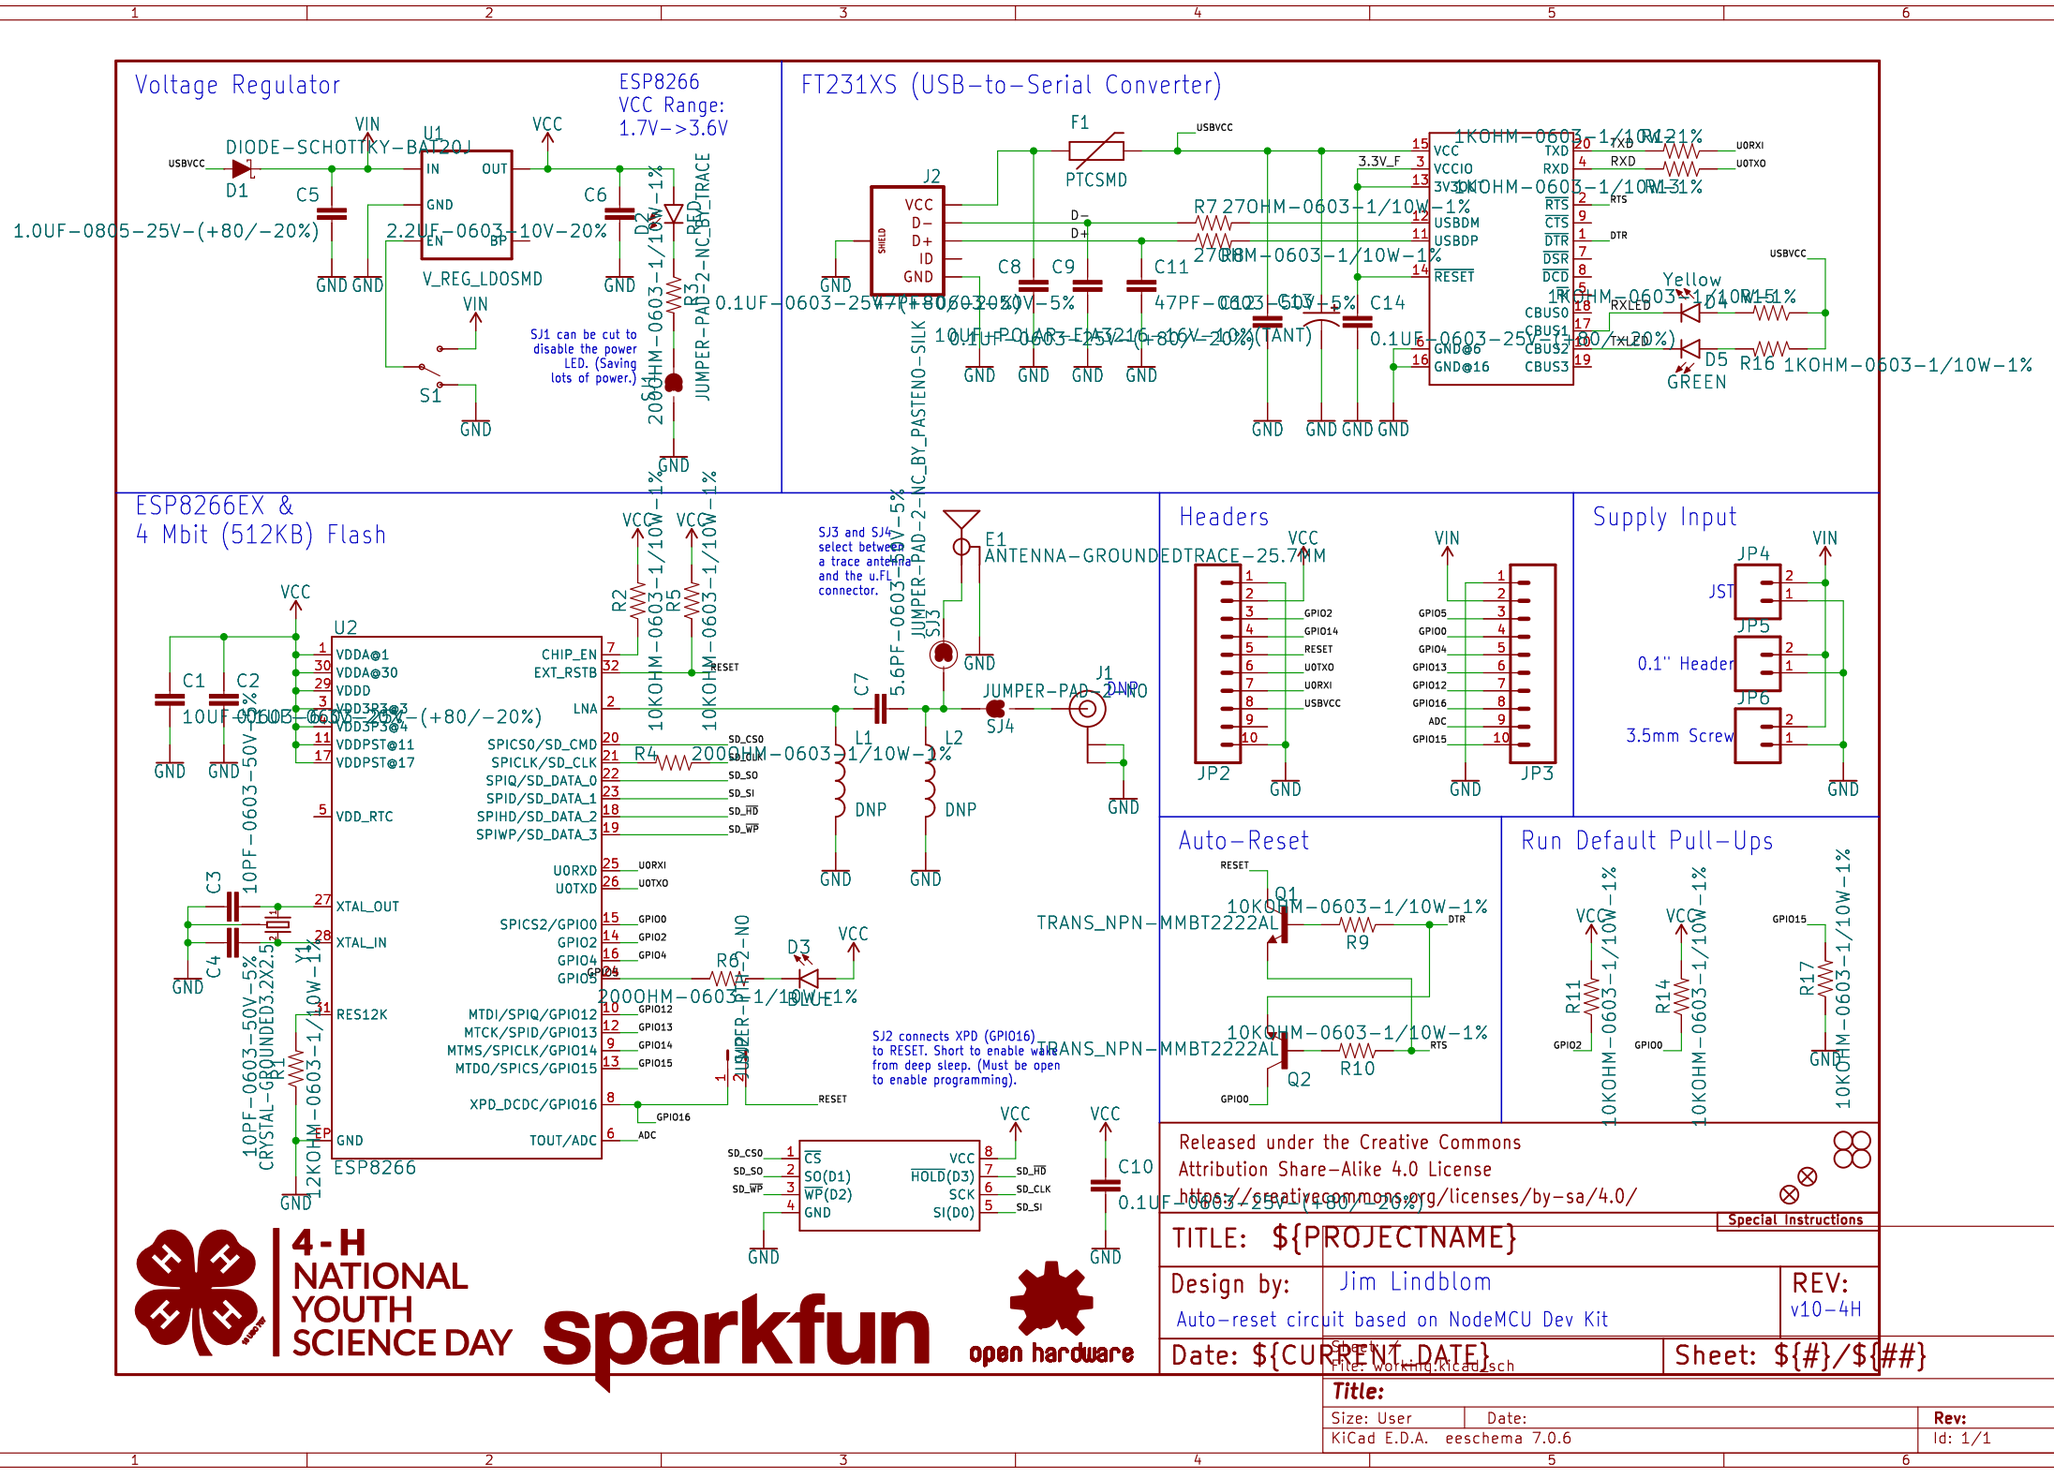

Voltage Regulator
ESP8266
VCC Range:
1.7V->3.6V
FT231XS (USB-to-Serial Converter)
ESP8266EX &
4 Mbit (512KB) Flash
Headers
Supply Input
Auto-Reset
Run Default Pull-Ups
SJ1 can be cut to disable the power LED. (Saving lots of power.)
SJ2 connects XPD (GPIO16) to RESET. Short to enable wake from deep sleep. (Must be open to enable programming).
SJ3 and SJ4 select between a trace antenna and the u.FL connector.
Released under the Creative Commons
Attribution Share-Alike 4.0 License
https://creativecommons.org/licenses/by-sa/4.0/
Special Instructions
TITLE: ${PROJECTNAME}
Design by:
Jim Lindblom
Auto-reset circuit based on NodeMCU Dev Kit
REV:
v10-4H
Date: ${CURRENT_DATE}
Sheet: ${#}/${##}
File: working.kicad_sch
Title:
Size: User
Date:
Rev:
KiCad E.D.A. eeschema 7.0.6
Id: 1/1
4-H
NATIONAL
YOUTH
SCIENCE DAY
sparkfun
open hardware