


NOTES:
 $2.7 < VCC < 3.3V$
 RST is pulled low enabling the IC
 SEN is pulled high enabling I2C

*you can solder a single piece of wire here for the antenna, up to 1.5 meters.
 *also see Si app note AN231

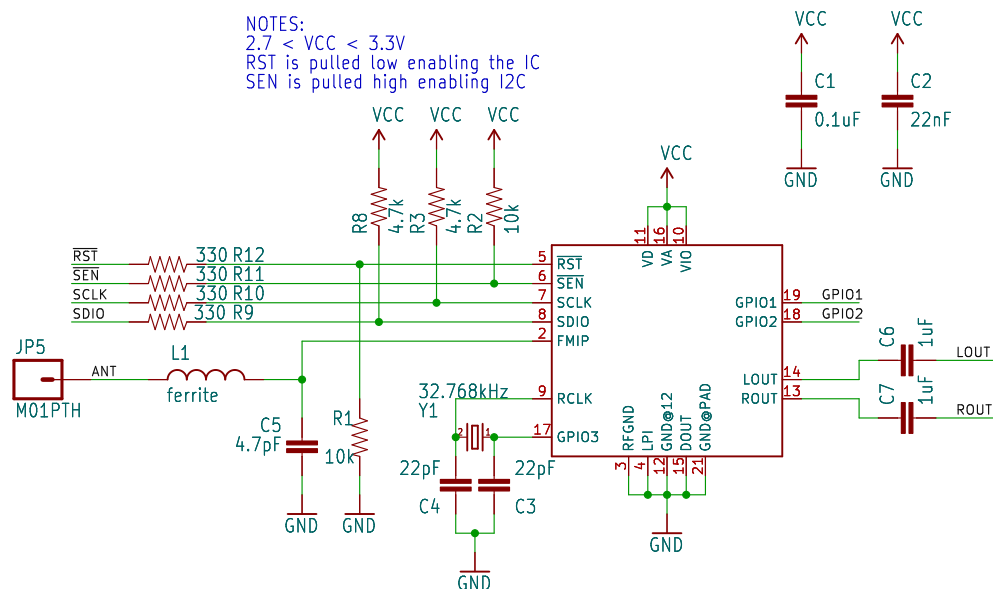

Released under the Creative Commons Attribution Share-Alike 3.0 License
<http://creativecommons.org/licenses/by-sa/3.0>
 Design by: A. Weiss

⊗ ⊗			
TITLE: \${PROJECTNAME}		SFE	SFE
Document Number:			REV: v13
Sheet: / File: <u>File</u> <u>Project</u> <u>Cache</u> <u>Search</u>			
Date: \${CURRENT_DATE}		Sheet: \${#}/\${##}	
Size: User		Date:	Rev:
KiCad E.D.A. eeschema 7.0.6		Id:	1