



MIDI IN

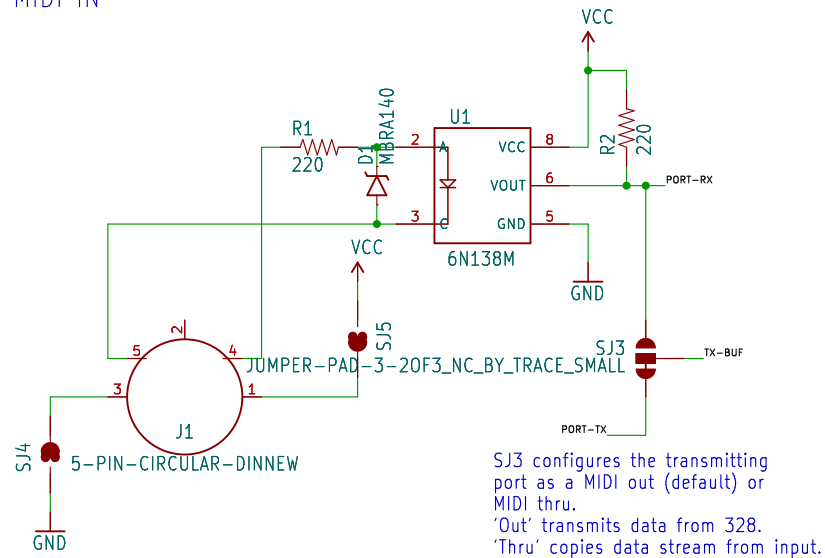


MIDI OUT

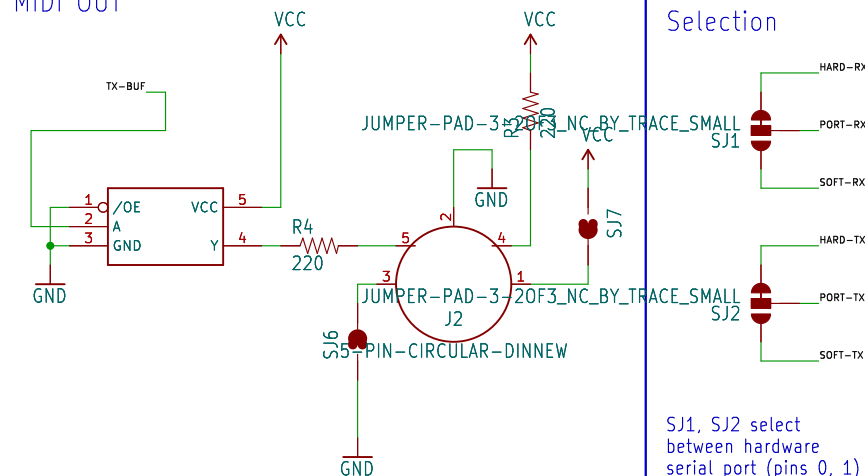

MIDI I/O reference design from:
<http://www.midi.org/techspecs/electricspec.php>
 SJ4, SJ5, SJ6, SJ7 implement power-over-MIDI,
 using pin assignment
 proposed by Craig Anderton
 (Pin 1 = Vcc, pin 3 = ground).
 Close JP4 & 5 to power the MIDI input.
 Close JP6 & 7 to power the output.

Shield Connections and controls

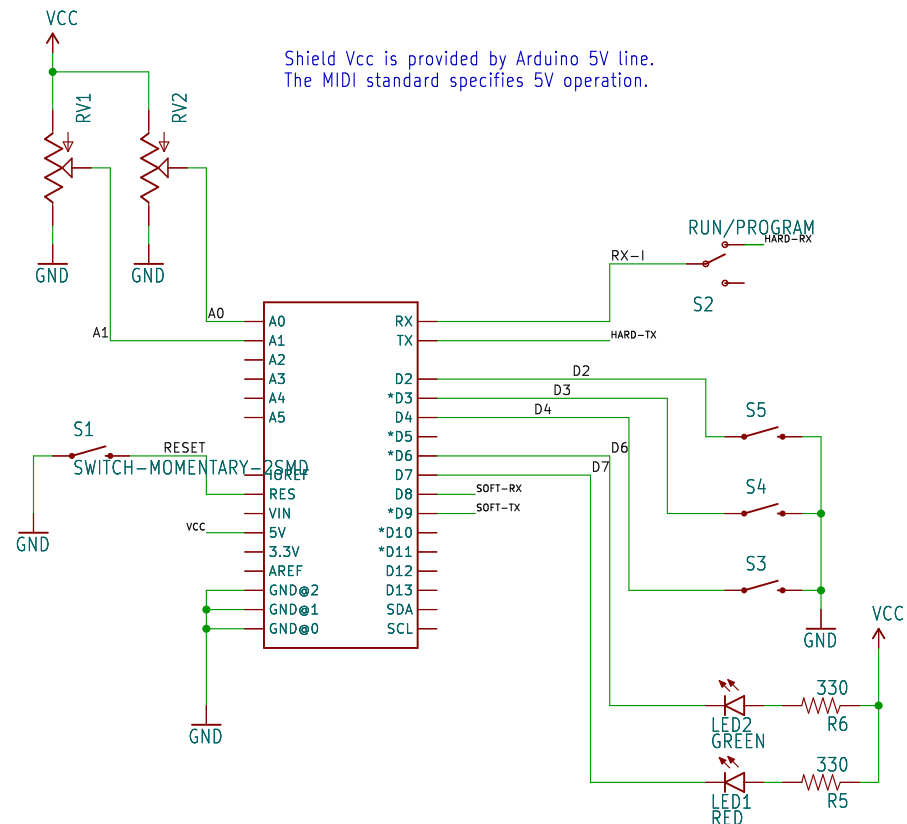

Set S2 to "PROG" to load Sketch on Arduino, then set to "RUN" for MIDI communication
 LED1, LED2, RV1, RV2, S3, S4, and S5 are available for application usage.

sparkfun



open hardware

Released under the Creative Commons

Attribution Share-Alike 4.0 License

<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Chris Taylor

Revision By: Byron Jacquot

REV:

V1.5

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User

Date:

Rev:

KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1

Id: 1/1