



OPTIONAL EXTERNAL VOLUME CONTROL
OPEN SOLDER JUMPER SJ1 AND ATTACH 10K POT TO JP4
(COM-00906, COM-09940, COM-09149, COM-10613, ETC.)

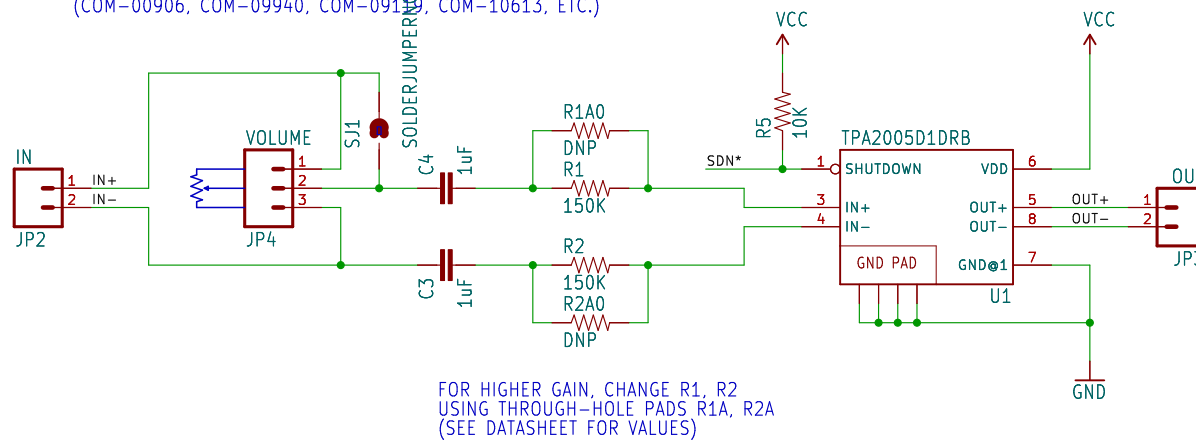


KEEP SPEAKER LEADS
AS SHORT AS PRACTICAL
TO MINIMIZE 250KHz EMI

FOR HIGHER GAIN, CHANGE R1, R2
USING THROUGH-HOLE PADS R1A, R2A
(SEE DATASHEET FOR VALUES)

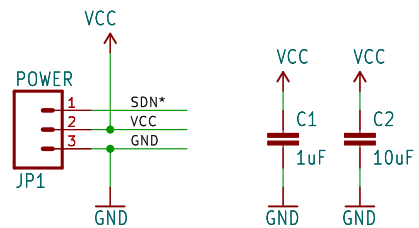

VCC RANGE: 2.5V TO 5.5V
SDN* = SHUTDOWN INPUT
< 2v = SHUTDOWN
> 2V OR DISCONNECTED = ACTIVE

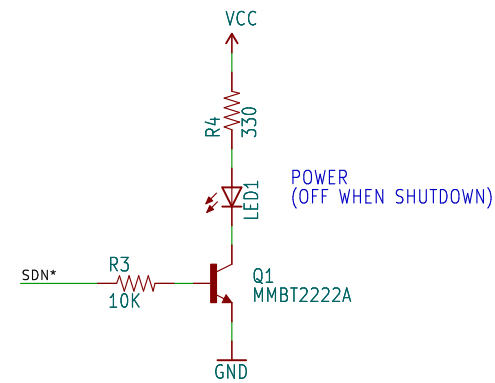

POWER
(OFF WHEN SHUTDOWN)

Released under the Creative Commons Attribution Share-Alike 3.0 License
<http://creativecommons.org/licenses/by-sa/3.0>
Design by: M. Grusin



SFE		SFE		⊗	
TITLE: \${PROJECTNAME}		REV: v11			
Document Number:				REV: v11	
Date: \${CURRENT_DATE}		Sheet: \${#}/\${##}			
Size: User		Date:		Rev:	
KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1		Id: 1/1			